


注: 未经许可禁止传播、复制、编辑该文档, 以及利用其内容进行交流

REV	E.C.N NO.	CONTENT	CHK	DATE

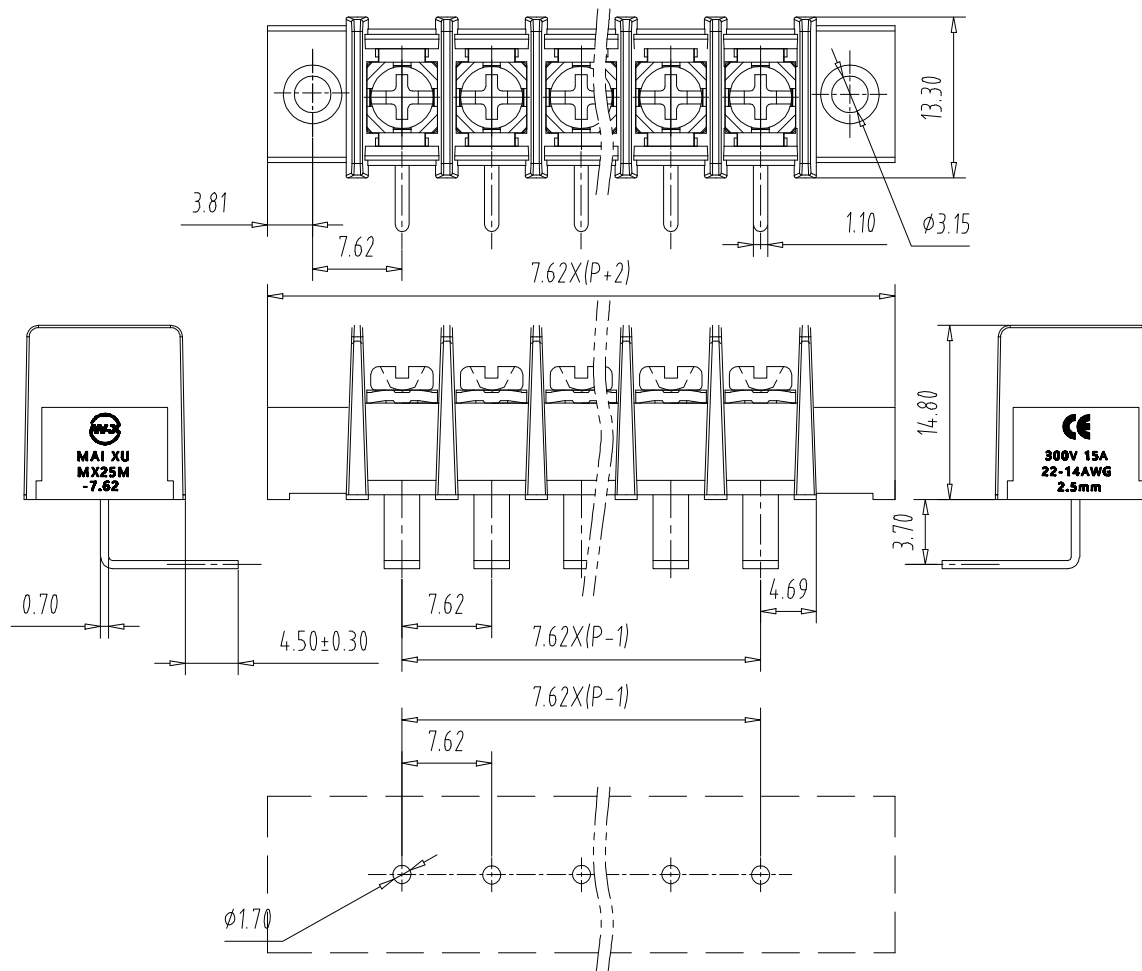

PCB Layout

NOTES1:

UL Standard

1. Use group	B	C	D
Rated Current	15A	/	10A
Rated Voltage	300V	/	300V

2. Torque value: M3, 4.43Lb.in

3. Wire range: 22~14AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	/	/	/
Rate Voltage(V)	/	250V	/
Rate Current(A)	/	17.5A	/

2. Torque value: M3, 0.5Nm

3. wire range: 1.5mm²

NOTES2:

1. Housing: PA66(UL94V-0)

2. Solder Pin: Copper alloy(Sn Plated)

3. Screw: Steel(M3,Ni Plated)

NOTES3:

1. Pitch: 7.62mm Poles: 02-24P

2. Operating temperature: -40℃~+105℃

3. RoHS Compliance

How to order

MX25RM	- 7.62	- XXP	- XXXX	- XX	- X	- X
产品型号	间距	极数	颜色	定制颜色	Cu:铜	Fe:铁
			灰色:GY 橙色:OE 02-99: 蓝色:BU 红色:RD 定制颜色 黑色:BK 透明色:TT 绿色:GN 黄色:YW 透明色:TT 白色:WE			
						A-Z其他定制
						0:Y一字螺丝
						1:S十字螺丝
						2:PS平头十字螺丝

Pitch Range In mm			Nominal Dimension Range In mm							—	∩	□
TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150			0.1/10		
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30			±2°		

ITEM	NAME OF PART		NO. OF PART	Q"TY	MATERIAL		NOTE	
DWG.	CKK	DATE	22.09.14	UNITS	MM	SHEET/OF	1/1	
CHK.		DATE		SCALE	1:1	A4		
APP.		DATE						
	CIXI MAIXU ELECTRONICS CO.,LTD.			NAME	MX25RM-7.62-XXP			
	慈溪市迈旭电子有限公司			DWGNO.				