
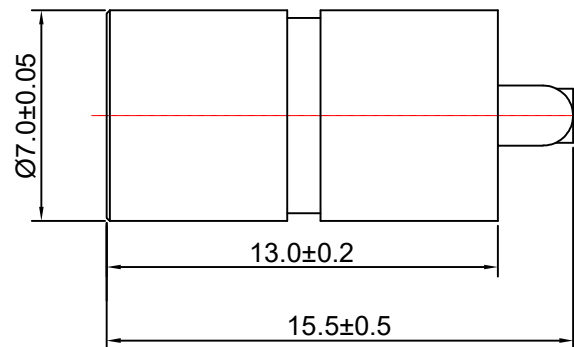


RoHS

REV.	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	新版发行	Chen HongJiang	Chen ZhiQiang	2025.05.08

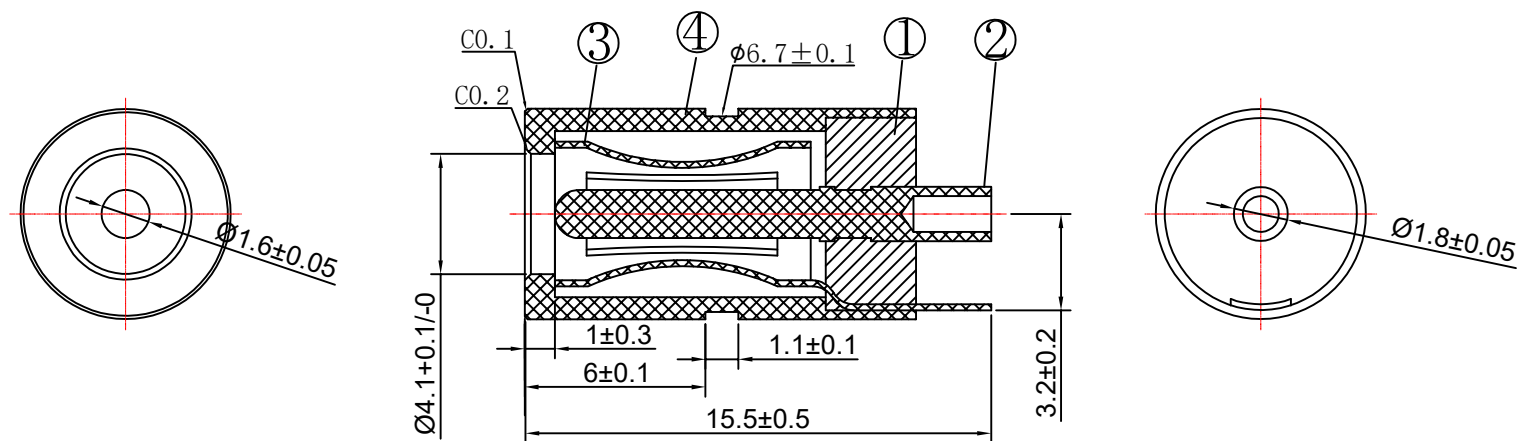

Technology Request;
1.Outlook;No burr,no hurt.
2.Electronic performance;
a.Insulation resistance;Above DC500V/100MΩ;
b.Endur voiage;AC500V at 1 minute
c.Contact resistance;Under 30mΩ
3.Insertion force & withdrawal force;0.3-3kgf
4.Salt spray test;24H
5.Meet RoHS.
6.Remark * is important specification

4	外管	C3604	Ni 1-5um
3	焊片	C5191	Ni 1-5um
2	针	C3604	Ni 1-5um
1	PLASTIC	PBT	Black
NO	PART	MATERIAL	PLATING

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

PART NO:		XF-4017JL70		XFCN兴飞连接器	
TITLE:		DC JACK 4.0*1.7*15.5mm 方胶 插板式 180度		0769-82001899	
				www.xfconn.com	
				DWG NO:	
APPD	Chen ZhiQiang				
CHKD	Liu Wei	VIEW			
DRAW	Chen HongJiang	SCALE	SHEET	REV	
DATE	2025.05.08	NONE	1/1	A1	