


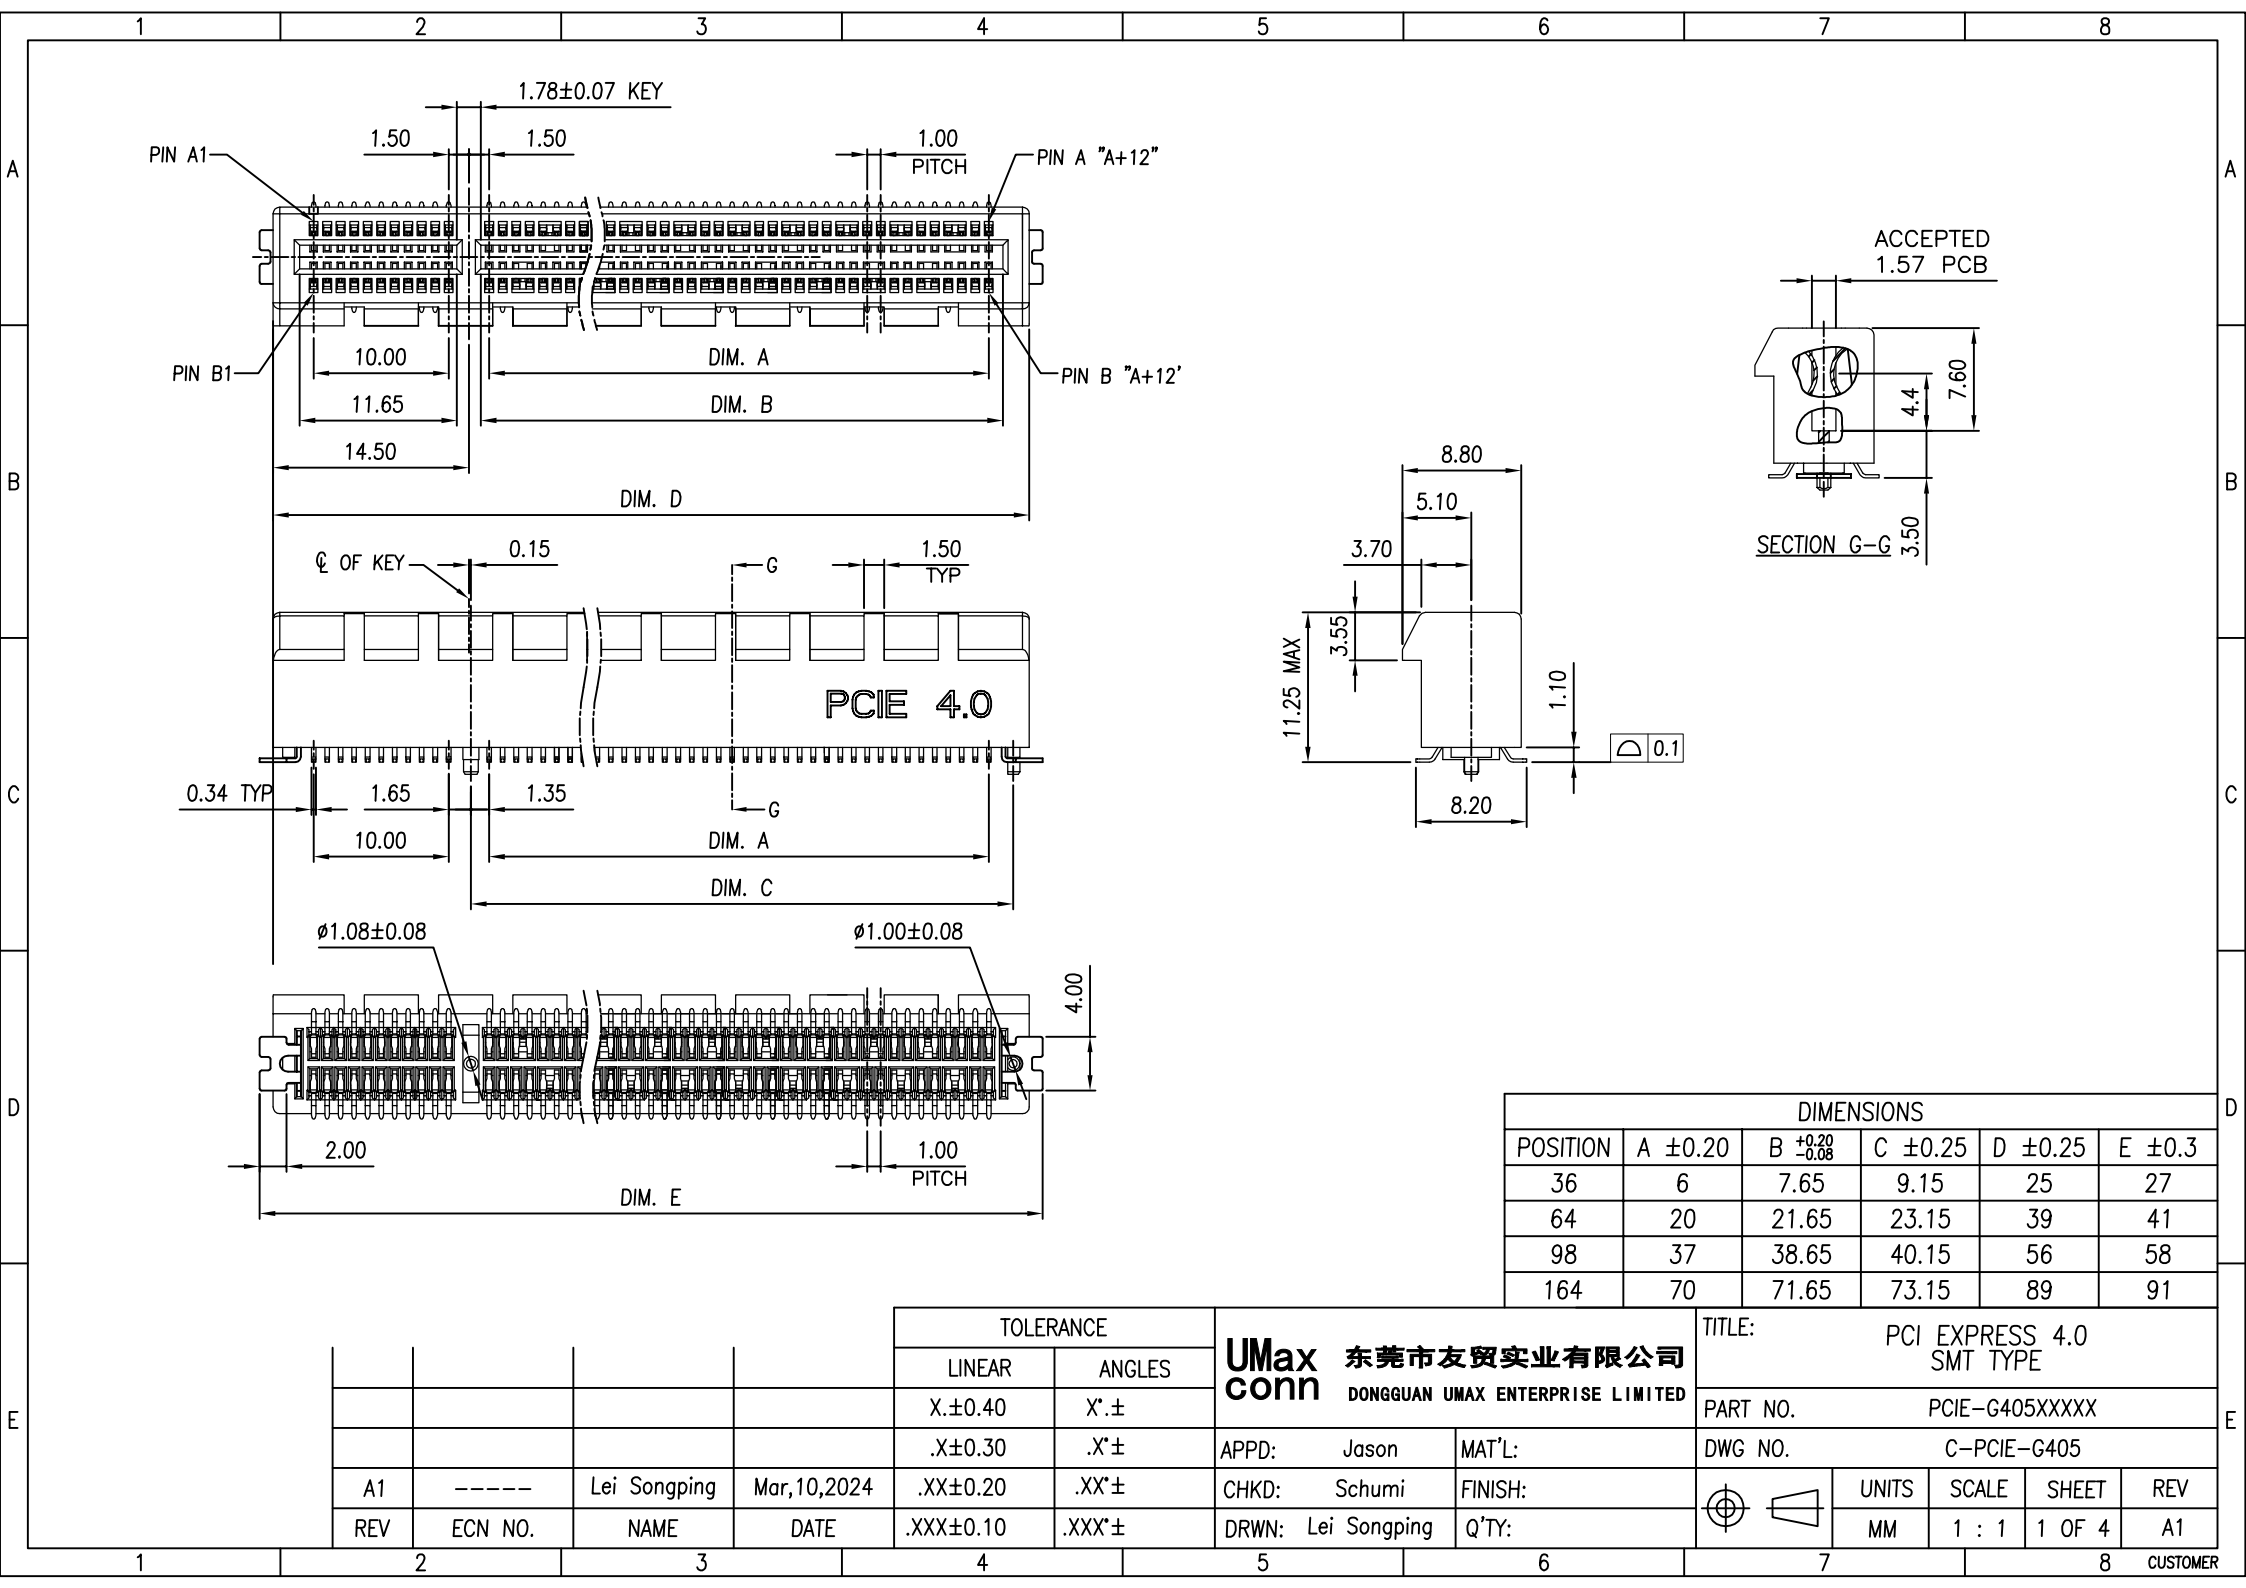




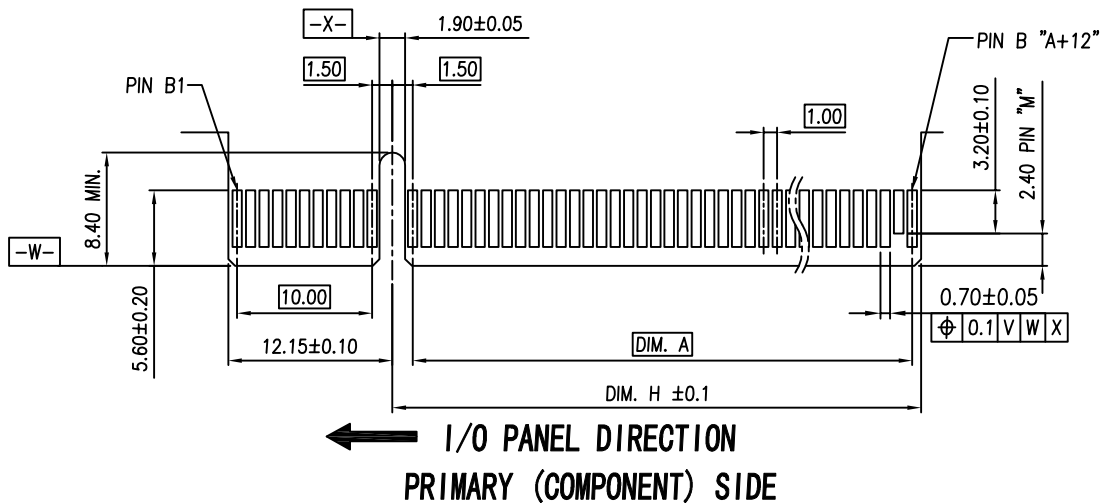


NOTES:
CHAMFER EDGE MUST BE FREE OF CUTTING BURRS

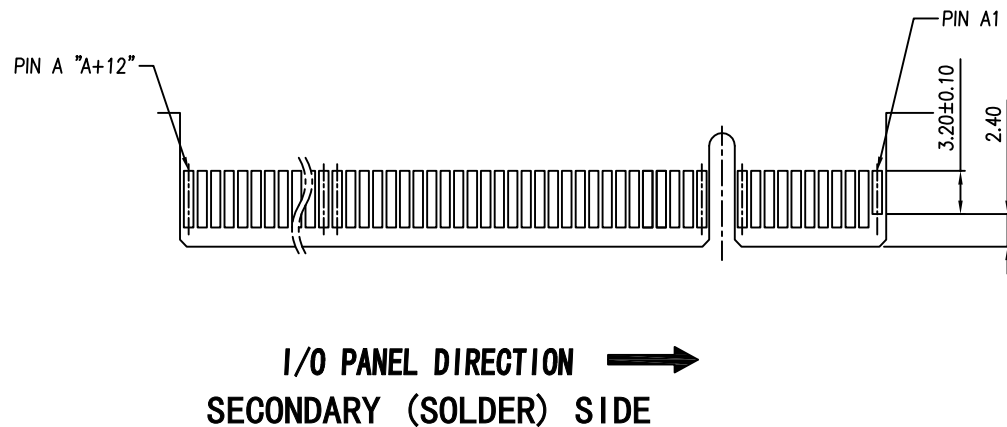

POS.	DIM. A	DIM. H	"M"
36	6	8.15	B17
64	20	22.15	B31
98	37	39.15	B48
164	70	72.15	B81

	See Sheet 1			.XX±	.XX'±	CHKD: Schumi	FINISH:		UNITS	SCALE	SHEET	REV
REV	ECN NO.	NAME	DATE	.XXX±	.XXX'±	DRWN: Lei Songping	Q'TY:		MM	1 : 1	2 OF 4	A1

CUSTOMER

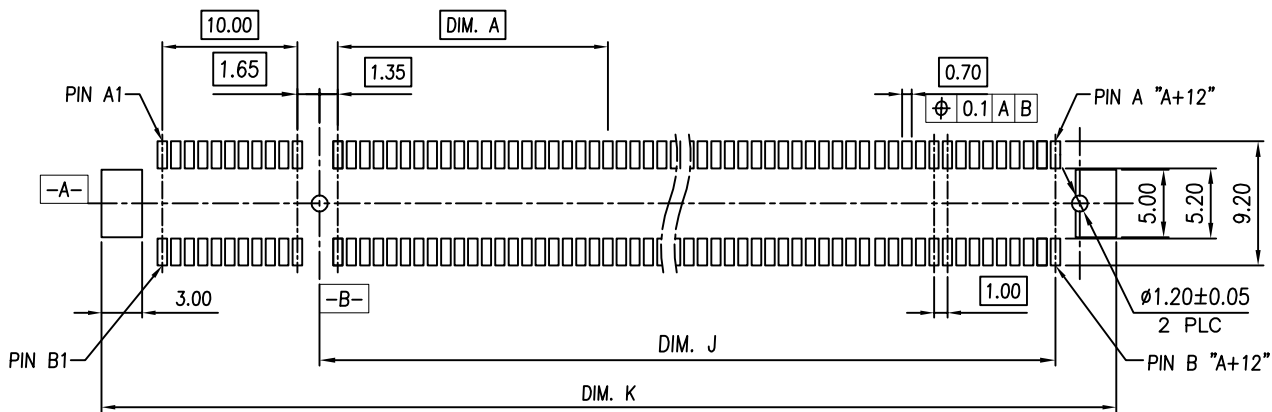

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE)

TOLERANCE: ±0.05

POS.	DIM. A	DIM. J	DIM. K	"M"
36	6	9.15	28.0	B17
64	20	23.15	42.0	B31
98	37	40.15	59.0	B48
164	70	73.15	92.0	B81

				TOLERANCE		UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED		TITLE: PCI EXPRESS 4.0 SMT TYPE				
				LINEAR	ANGLES			PART NO. PCIE-G405XXXXX				
				X.±	X'.±			DWG NO. C-PCIE-G405				
				.X±	.X'±							
	See Sheet 1			.XX±	.XX'±	APPD: Jason	MAT'L:		UNITS	SCALE	SHEET	REV
REV	ECN NO.	NAME	DATE	.XXX±	.XXX'±	CHKD: Schumi	FINISH:					
						DRWN: Lei Songping	Q'TY:		MM	1 : 1	3 OF 4	A1

1.1 HOUSING: THERMOPLASTIC, HIGH TEMP, UL94V-0, COLOR: BLACK.
1.2 CONTACTS: COPPER ALLOY.
1.3 HOLDDOWN: COPPER ALLOY.
1.4 CAP: THERMOPLASTIC, HIGH TEMP, UL94V-0, COLOR: BLACK.

50μ" MIN. NICKEL UNDERPLATING OVERALL.

100μ" MIN. MATTE-TIN PLATING WITH 50μ" MIN. NICKEL UNDERPLATE OVERALL.

5. PACKAGING SPEC: 311304001 FOR TRAY, 311304002 FOR REEL, 311304003 FOR HARD TRAY

Packaging Options

- T: Tray Packaging
- C: Tray Packaging With Cap
- N: Tray Packaging With Mylar
- R: Tape & Reel Packaging
- P: Tape & Reel Packaging With Cap
- M: Tape & Reel Packaging With Mylar
- A: 72mm Width Tape & Reel Packaging With Cap
- Y: Hard Tray Packaging
- Z: Hard Tray Packaging With Mylar
- B: Hard Tray Packaging With Cap



CUSTOMER