
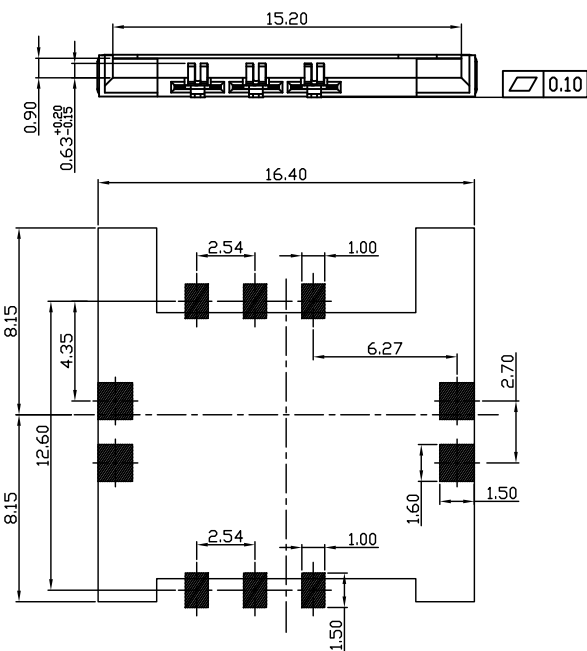
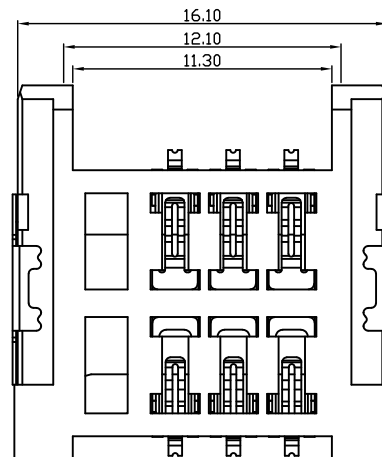



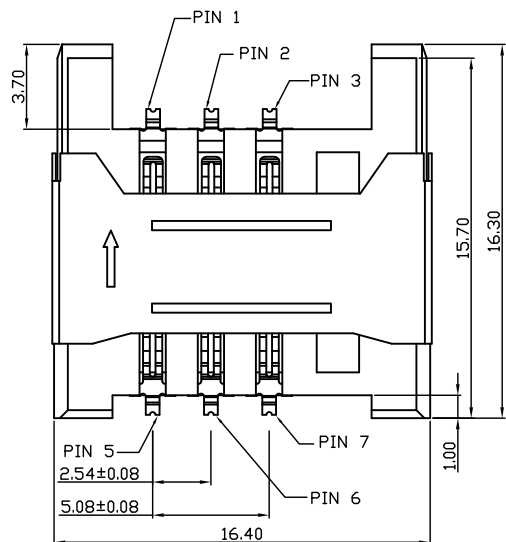

Recommended PCB Layout

备注:

1. 材质:

1.1 胶芯: LCP UL94V-0

1.2 端子: 磷铜, 半金锡, 触点镀金 0.5μ ", 雾锡50-80U"1.3 外壳: SUS, 镀底 30μ ", 焊脚镀金 0.5μ "

2. 主要特性:

2.1 额定电流: 0.5A

2.2 接触阻抗: $50m\Omega$ MAX2.3 绝缘阻抗: $100M\Omega$ MIN 100V DC

2.4 耐压测试: 100V AC

2.5 沾锡性: 温度 $235\pm 5^{\circ}C$, 时间 $5\pm 0.5s$ 2.6 单PIN正向应力: $0.035kgf$ MIN

2.7 使用寿命: 1000次

2.8 耐温性: 烤箱测试: 温度 $250\pm 5^{\circ}C$, 时间2分钟2.9 工作环境: 温度: $-30^{\circ}C\sim +80^{\circ}C$; 湿度: 80% MAX

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." $\pm 2^{\circ}$ X.X" $\pm 0.5^{\circ}$

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

SIM 6P连桥带挡脚向内1.8H 防渍P

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYCW209-SIM06-180B

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2403221801

SHEET NO.

1 OF 1