

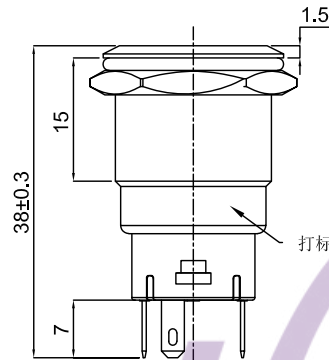
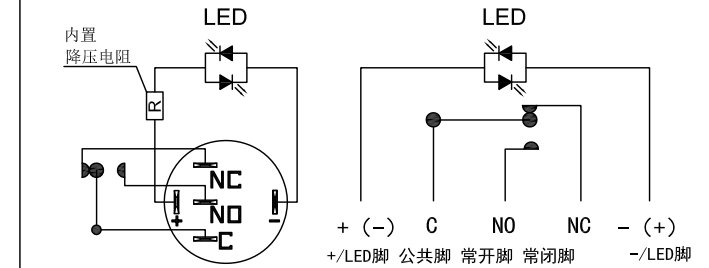
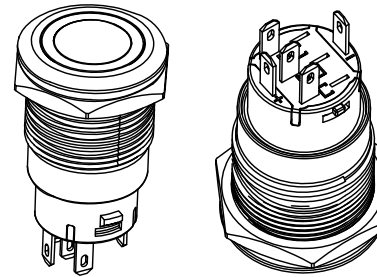





HAOYU


轴视图





打标

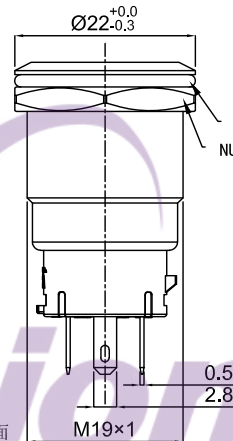

面板最大厚度10.5



安装视图

CD超细纹路光面
环形发光环

1. Rating : DC36V 3A.
2. Contact resistance: $\leq 50m\Omega$.
3. Insulation resistance: $\geq 1000M\Omega$ (DC500V).
4. Withstanding voltage: 2000VAC .
5. Operating Force: $\geq 4N$
6. 按压行程: 自锁3mm/复位 $2.5\pm 0.1mm$
7. life test: 50000 cycles.LED灯寿命: 40000h,
8. Operation temperature range: $-25^{\circ}C \sim 85^{\circ}C$.
9. Sign"* "is importance dimension.

发光类型:E环形/DY电源符号/D单点状/E+DY环形+电源符号/E+D环形+单点状
发光颜色: R红/G绿/L蓝/Y黄/W白/O橙/P紫
额定电压: AC/DC:3V/6V/12V/24V/36V/48V/AC:60V/110V/220V
TEL:0769-82310511-867

10	发光区域	PC		
9	C/NO/NC TERMINAL	BRASS	1	Ag-PLATED
8	LED TERMINAL	BRASS	2	Ag-PLATED
7	CONTACT	SILVER ALLOY	3	Ag-PLATED
6	C/NO/NC BASE	PA46	1	
5	LED BASE	PC	1	
4	NUT	BRASS	1	Ni-PLATED
3	WASHER	RUBBER	1	WHITE
2	COVER	SUS/BRASS	1	BRASS:Ni-PLATED
1	BUTTON	SUS	1	
NO.	PART NAME	MATERIAL	QTY	FINISHING

TOLERANCE UNLESS SPECIFIED							
<1.5: ±0.1mm >1.5~5.0:±0.25mm >5.0:±0.3mm	ANGULAR ±1°	1					
		NO	DATE	REVISIONS			BY
TITLE: PUSH SWITCH				UNIT : MM	ROHS	DWN	
MODEL:HY-19A-P11-S-E-G12V-CU-008				SCALE: 1:1	COMPLIANT	CHK'D	
东莞市六钧电子五金有限公司						APPD	
						PRO.AGL:  	