

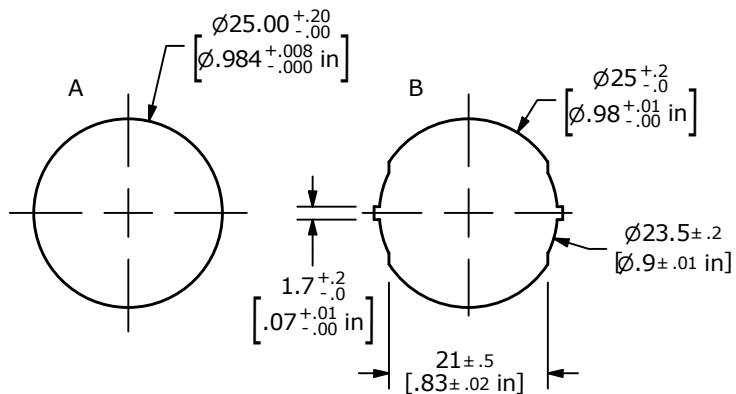
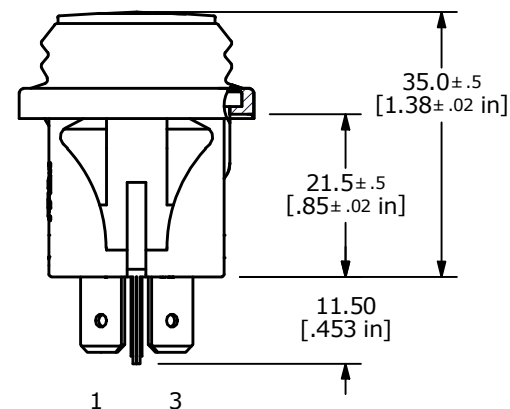
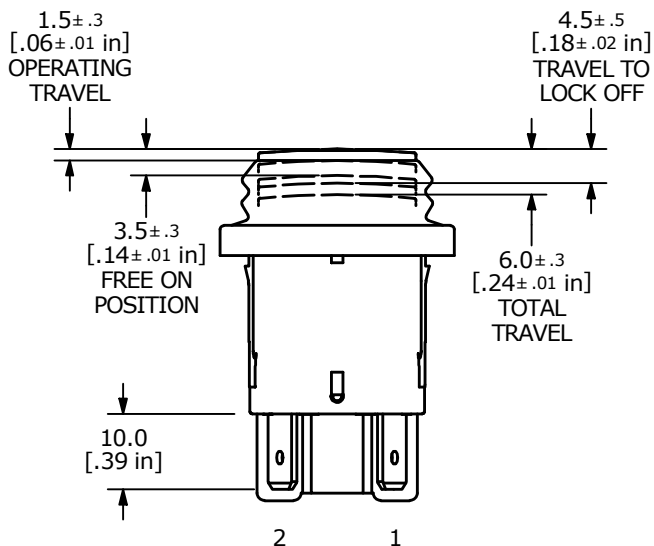


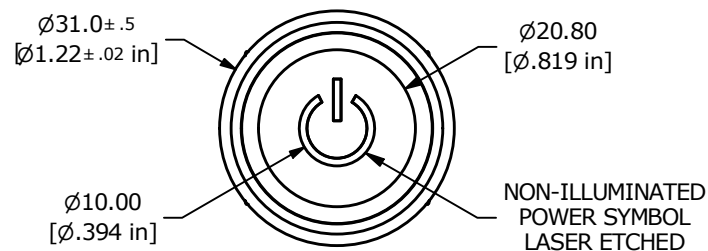


RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 0.7~ 2.5mm

SWITCH FUNCTION	
POS. 1	POS. 2
	
OPEN	1-3, 2-4

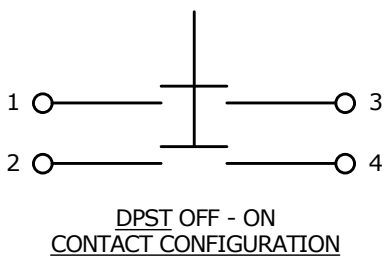

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.5
X.XX = ± 0.30
3. TERMINAL NUMBERS FOR REF. ONLY
- ▲ 4. RATING: 16(16)A @ 127VAC
5. CONTACT RESISTANCE: 50m Ω MAX.
6. INSULATION RESISTANCE: 2M Ω @ 500VDC
7. DIELECTRIC STRENGTH: 1,300VAC MIN. FOR 1 MINUTE
8. ELECTRICAL LIFE: 50,000 CYCLES
9. OPERATING TEMPERATURE: 0°C to 55°C
10. ACTUATION FORCE: 13 $\pm$ 5N (AT 5mm TRAVEL)
11. INGRESS PROTECTION: IP66 (AFTER MOUNTING)
12. ▲ DENOTES CRITICAL PARAMETER
13. 2011/65/EU (ROHS) COMPLIANT

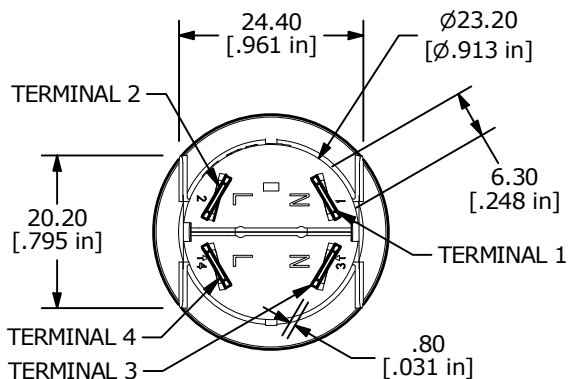

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
B	ECO-101925	PRINT UPDATE	05/30/23	JS	TITLE PB66EE2CR6N					100123380
A	ECO-101536	NEW RELEASE	01/12/23	MR						
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV	
					1:1	12/27/2022	MJR	34-PB66EE2CR6N	B	