
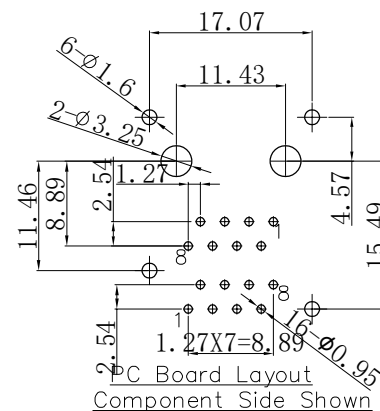
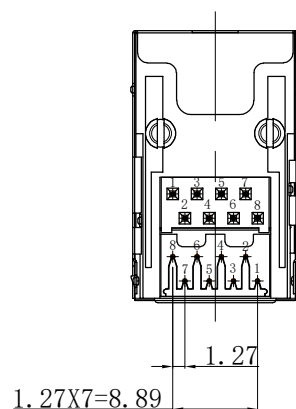


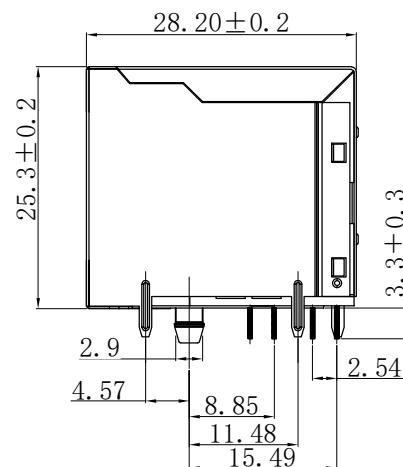

1. 外壳材质: PBT,PA46 (UL 94V-0)
Housing Material: PBT,PA46 (UL 94V-0)
2. 触点材料: 圆针直径0.46mm磷青铜; 镀镍后镀金
Contact Material: Round Pins-0.46mm Diameter
Phosphor Bronze;
Gold Plating Over Nickel
3. 屏蔽壳: 镀镍铜合金, 厚度0.2mm
Shield: 0.20mm Thickness Copper Alloy
With Nickel Plated

1. 额定电压: 125伏
Voltage Rating : 125 V Rms
2. 额定电流: 1.5安培
Current Rating: 1.5 AMP
3. 接触电阻: 最大30毫欧
Contact Resistance: 30 Milliohms MaX
4. 绝缘电阻: 500V下, 绝缘最小500兆欧
Insulation Resistance: 500 megohms min @500V
5. 绝缘耐压: 60Hz 1000V下, 1分钟
Dielectric Withstanding
Resistance: 1000V Rms 60Hz. 1Min
6. 耐久: 插拔750次以上
Durability: 750 Cycles Min
7. 工作温度: -40℃~+85℃
Operation Temperature: -40℃~+85℃

5902 - X X X X X X

Positions	Contacts	Ports	Shield	septum	Plastic	Gold Plating
8	2, 4, 6 or 8	1-2x1 2-2x2 3-2x3 4-2x4 5-2x5 6-2x6 7-2x7 8-2x8	0-W/0 Shield 1- Shield W/ EMI 2- Shield W/0 EMI 3- W/ half Shield	0-entirety 1-W/0 septum 2-W septum	1-PBT 2-PA46 3-Other 4-Other	1-G/Fu 2-1u 3-3u 4-6u 5-15u 6-Other

未 注 公 差		设 计	X.C.S
尺寸标注	公 差	审 核	Z.J.G
	长 度 角 度		
X.	± 0.25	批 准	D.X.B
.X	± 0.20		
.XX	± 0.15		
XXX	$+0.10$	角 法	

恒 连 电 子 科 技 有 限 公 司
EVERCOM ELECTRONIC TECHNOLOGY CO., LTD

产品型号		5902 2×1 8P8C 屏蔽无弹无隔片	
产品编号		5902-88121XX	图纸编号