


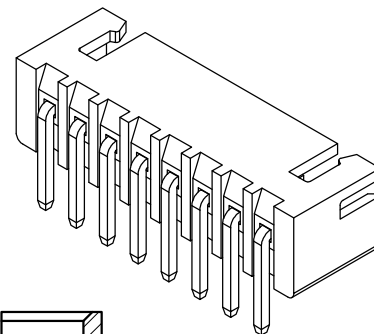


RoHS

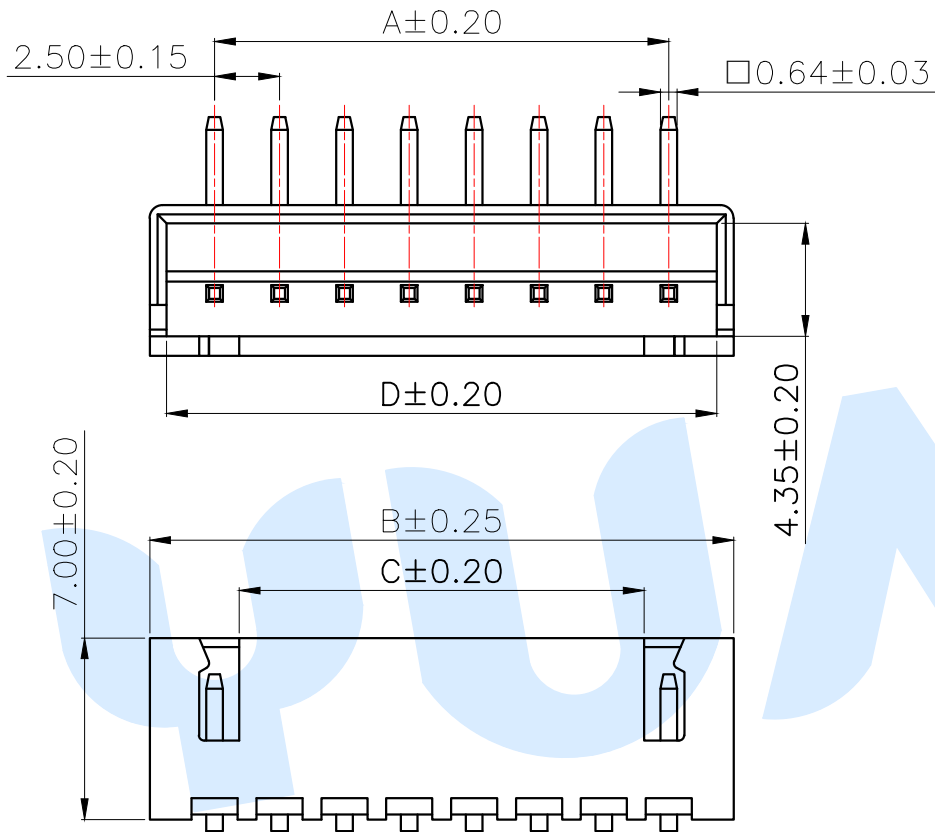


SECTION A-A

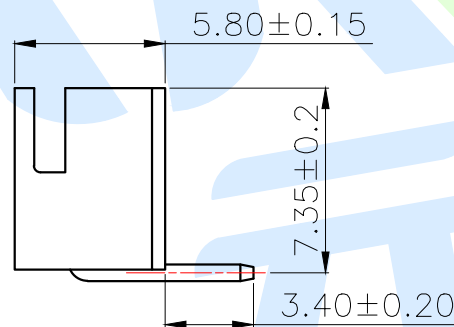

Model No.	Pin	A	B	C	D
WAFER-XH2.54-2PWZ-W	2	2.50	7.50		6.20
WAFER-XH2.54-3PWZ-W	3	5.00	10.00	3.00	8.70
WAFER-XH2.54-4PWZ-W	4	7.50	12.50	5.50	11.20
WAFER-XH2.54-5PWZ-W	5	10.00	15.00	8.00	13.70
WAFER-XH2.54-6PWZ-W	6	12.50	17.50	10.50	16.20
WAFER-XH2.54-7PWZ-W	7	15.00	20.00	13.00	18.70
WAFER-XH2.54-8PWZ-W	8	17.50	22.50	15.50	21.20
WAFER-XH2.54-9PWZ-W	9	20.00	25.00	18.00	23.70
WAFER-XH2.54-10PWZ-W	10	22.50	27.50	20.50	26.20
WAFER-XH2.54-11PWZ-W	11	25.00	30.00	23.00	28.70
WAFER-XH2.54-12PWZ-W	12	27.50	32.50	25.50	31.20
WAFER-XH2.54-13PWZ-W	13	30.00	35.00	28.00	33.70
WAFER-XH2.54-14PWZ-W	14	32.50	37.50	30.50	36.20
WAFER-XH2.54-15PWZ-W	15	35.00	40.00	33.00	38.70
WAFER-XH2.54-16PWZ-W	16	37.50	42.50	35.50	41.20
WAFER-XH2.54-17PWZ-W	17	40.00	45.00	38.00	43.70
WAFER-XH2.54-18PWZ-W	18	42.50	47.50	40.50	46.20
WAFER-XH2.54-19PWZ-W	19	45.00	50.00	43.00	48.70
WAFER-XH2.54-20PWZ-W	20	47.50	52.50	45.50	51.20


Specifications/技术规格:

- 1.Poles/线数: 2~20P
- 2.Wire range/适用线规: AGW 28#~22#
- 3.Applicable PC board thickness/适用PC板厚度: 1.6mm
- 4.Current rating/额定电流: 3.0A
- 5.Voltage rating/额定电压: 250V DC/AC
- 6.Insulation Resistance/绝缘电阻: 1000M Ω Min
- 7.Dielectric Withstanding/ 耐电压: 1000V AC/minute
- 8.Contact Resistance/ 接触电阻: 30m Ω Max
- 9.Operating Temperature/ 工作温度: -25 $^{\circ}$ C to +85 $^{\circ}$ C

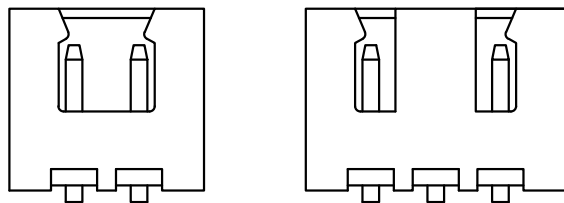

2P (外观)

3P~20P (外观随孔位递进自然变化)

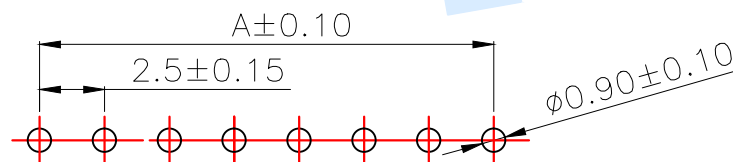

适用线路板 (PCB LAYOUT)

⑧	Terminal			Brass	Plating Sn
⑨	Housing		1	PA66	White
NO.	Name	Number	Qty	Materil	Remarks

YUANDI® Yuandi Electronics Co.,Ltd

design	date	name	WAFER CONNECTOR
Review	date	model	WAFER-XH2.54-□□PWZ-W
Approved	date		

Drawing number:

modify	Review	Approved	Tolerance not specified	Proportion	1:1	unit	mm	gaps number	A4
--------	--------	----------	-------------------------	------------	-----	------	----	-------------	----