

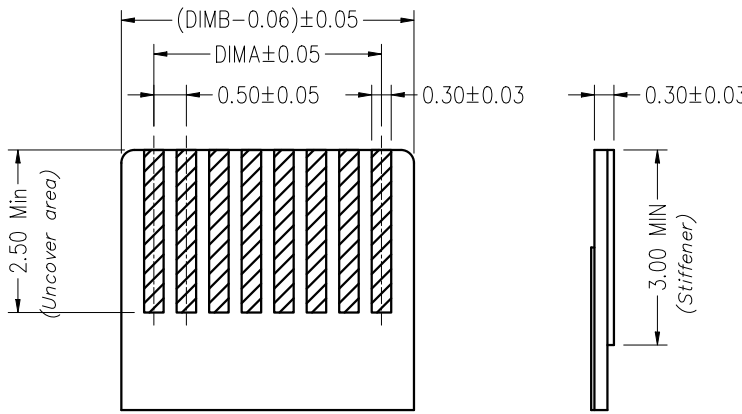
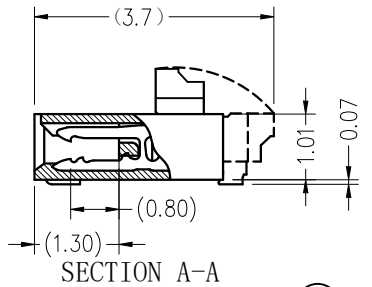
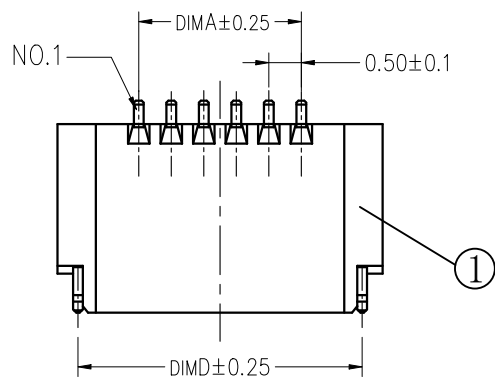

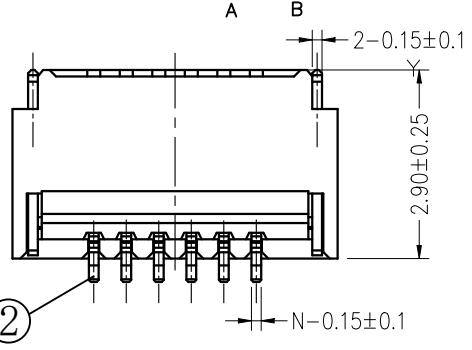


适用扁平线(Applicable Flat Cable)

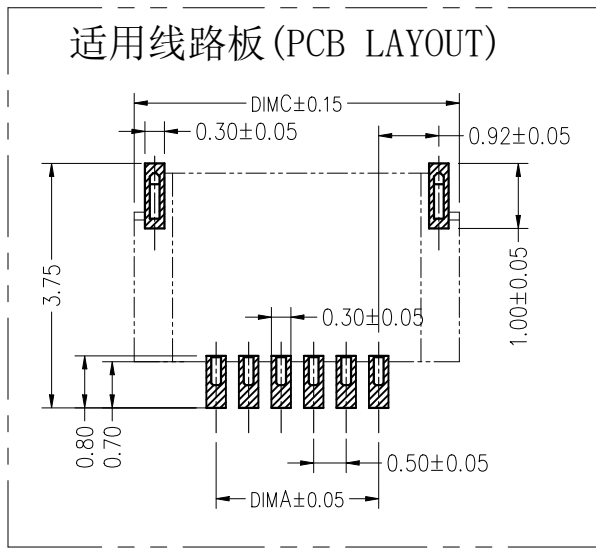

序号 NO.	品名TITLE	材质material
①	0.5 后压卧式胶芯 (H1.0) 0.5 Pitch After SMT Housing (H1.0)	LCP UL94V-0 本色 Natural
②	0.5 后压卧式端子 (H1.0) 0.5 Pitch After SMT Terminal (H1.0)	铜合金/表面镀锡 Copper Alloy/ Tin Plating
③	0.5 后压卧式后盖 (H1.0) 0.5 Pitch After SMT Actuator (H1.0)	LCP UL94V-0 黑色 Black
④	0.5 后压卧式焊片 (H1.0) 0.5 Pitch After SMT Fitting Nail (H1.0)	铜合金/表面镀锡 Copper Alloy/ Tin Plating

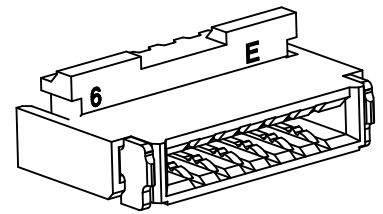

CKT	DIMA	DIMB	DIMC	DIMD
4	1.50	2.56	4.00	3.37
5	2.00	3.06	4.50	3.87
6	2.50	3.56	5.00	4.37
8	3.50	4.56	6.00	5.37
10	4.50	5.56	7.00	6.37
12	5.50	6.56	8.00	7.37
14	6.50	7.56	9.00	8.37
16	7.50	8.56	10.00	9.37
18	8.50	9.56	11.00	10.37
20	9.50	10.56	12.00	11.37
22	10.50	11.56	13.00	12.37
24	11.50	12.56	14.00	13.37
26	12.50	13.56	15.00	14.37
28	13.50	14.56	16.00	15.37
30	14.50	15.56	17.00	16.37
32	15.50	16.56	18.00	17.37
34	16.50	17.56	19.00	18.37
40	19.50	20.56	22.00	21.37

技术指标(Technical Index):

- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena.)
- 温度范围(Temperature range): -25° C~+85° C.
- 额定电压(Rated voltage): 50V, AC/DC(=等效).
- 接触电阻(Contact resistance): ≤0.03Ω.
- 绝缘电阻(Insulation resistance): ≥500MΩ.
- 产品料号(Product material No.):

HW0510010-*** * * -***
NO OF CKT(产品PIN数) * 流水码
Plating(电镀方式) * Packing(包装方式)
0:端子全雾锡 T:TUBE管装
1:端子全金 R:TAPE & REEL卷装
2:端子点镀金
4:端子半金锡



一般公差(TOLERANCE)
X. ±.50 .XX ±.10
X. ±.20 .XXX ±.05
ANGLES ±1°

ZGWD 浙江温达电子有限公司
ZHEJIANG WENDA ELECTRONICS CO.,LTD

品名 (TITLE) 0.5 Pitch后压卧式(H=1.0)
0.5 Pitch After SMT CONN. (H1.0)

料号 (DWG. NO) HW0510010-****-****

比例 (SCALE) 1:1

制图 (DR) Anlan

校对 (CHKD) 田峰

审核 (APPD) 黄志明

单位 (UNITS) mm

张数 (SHEET) 1 OF 1

SIZE REV A4 A