


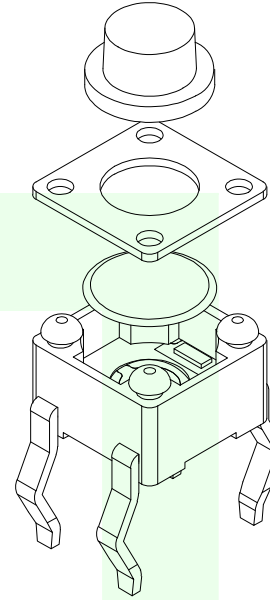



RoHs


VER	MARK	PR. BY	DESCRIPTION	DATE

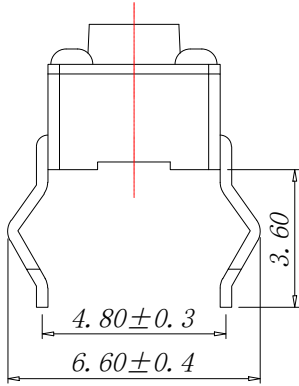

CIRCUIT DIAGRAM

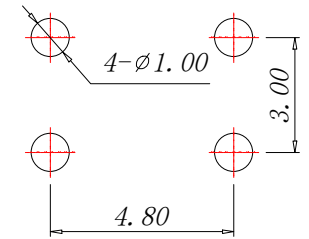

PCB.WELDING DRAWING

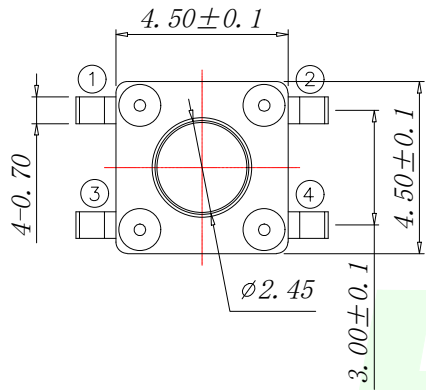

TS70320-413-AA


The Main Thchnology Performance

Rate voltage,current	50mA DC12V
Contact resistance	≤100mΩ
Operating force	±50gf
Travel	0.20±0.10mm
Insulated resistance	≥100MΩ
Dielectric strength	≥250VAC/1min

按力码 按力可定制
100=10
150=15
280=28

高度码
H4. 3=043
H4. 5=045
H4. 8=048
H5. 0=050
H5. 5=055
...
H10. 0=100

E	按钮	PPA	1	黑色
D	盖板	铁盖板	1	镀铜锡
C	弹片	不锈钢	1	镀银
B	本体	PPA	1	黑色
A	卡件	黄铜	1	镀银
ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd		
X.X ±0.35	X.° ±5°	PART NO. TS70320-413-AA	TITLE: 4.5x4.5 DIP TACT SWITCH	
.XX ±0.25	X.X° ±3°			
.XXX ±0.15	X.XX° ±1°	DESIGN: James	CUSTOMER	SIZE
MANUFACTURE DWG		CHED: Talen		UNITS
		APPD: Sophia		SCALE
				SHEET
			N:A	1/1