
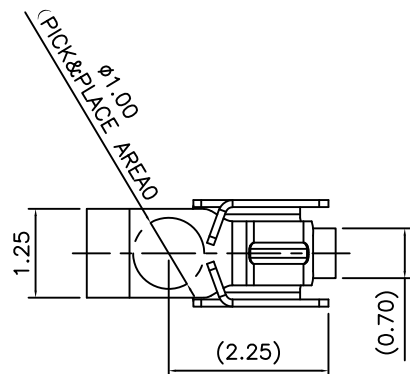

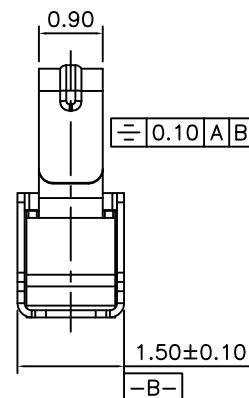
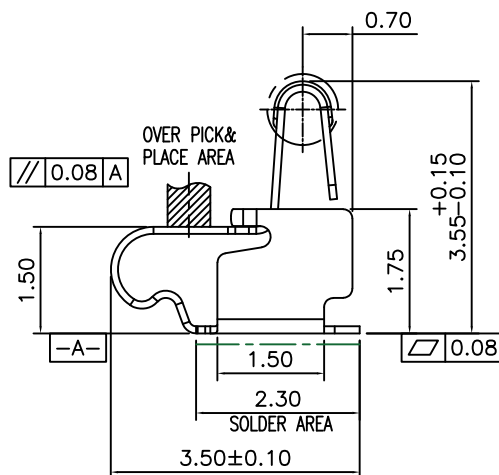


3D View

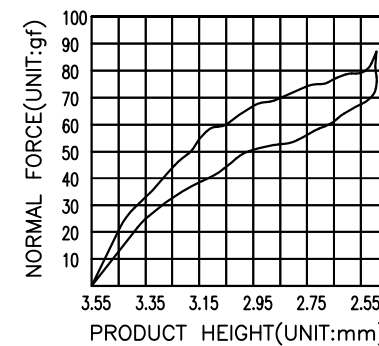

SCALE 2/1

NOTES

(1) MATERIAL: SUS-304 THICKNESS=0.10mm

(2) PRODUCT SPECIFICATIONS:

2-1: RATED CURRENT: 1.0A

2-2: VOLTAGE RATING: 1.50V

2-3: CONTACT RESISTANCE: 80mΩ/MAX

2-4: WELDING THRUST: ≥ 3KG

2-5: OPERATING TEMPERATURE: -40°C~+85°C

2-6: DURABILITY: 1500 CYCLES

(3): SALT SPRAY: 24 HOURS



(4): REQUIREMENTS

4-1: TERMINAL TO EAT FULL TIN, NOT PEELING

WELDING OBVIOUS COLOR AND OTHER ADVERSE

4-2: ROHS, REACH, HF HALOGEN ADVERSE OF DOMESTIC

AND INTERNATIONAL ENVIRONMENTAL REQUIREMENTS

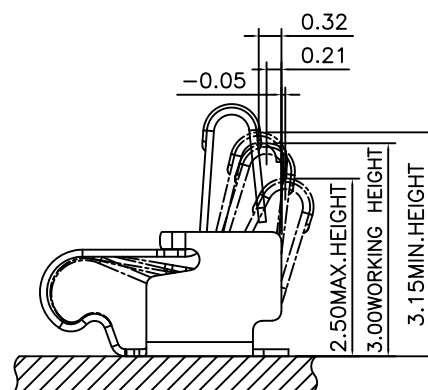RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05 (焊盘推荐图)STATED AT COMPRESSION
(FOR REFERENCE ONLY)

深圳市华宇创精密电子有限公司


TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X.X' ±2" X.X" ±0.5"



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

PART NAME:

天线弹片 L3.50*W1.50*H3.50

CHECKED BY:

马跃

DATE:

2014-02-23

PART NO.

HYCW-TXT351535AL

APPROVED BY:

邱敏

DATE:

2014-02-23

DRAW NO:

HYC-2412191548

SHEET NO.

1 OF 1