

NOTES1:

UL Standard

- Rated voltage/current : 300V / 10A
- Withstanding voltage : AC1600V/1Min.

IEC Standard

1.	Pollution degree	2	2	3
	Overvoltage category	II	III	III
	Rate impulse voltage(KV)	4KV	4KV	4KV
	Rate voltage(V)	630V	400V	250V
	Rate current(A)	8A		

NOTES2:






- Dimension shall be interpreted per ASME Y14.5-2009
- Pitch : 5.08mm, Poles : N=04~48P
- Operating temperature: -40°C~+105°C
- Undimensioned tolerances:

Normal tolerances in mm					—	⌒	▯
≤5	>5 ~ 20	>20 ~ 50	>50 ~ 100	>100 ~	0.10/10		
±0.15	±0.20	±0.30	±0.40	±0.50	±2°		

5.RoHS Compliance

Ordering Information

JL2EDGVHCM - 508		XX	X	XX	
Pitch 508=5.08PH	No.of pins 04=4P 06=6P ⋮ 48=48P		Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow O=Orange E=Grey	Stream code	

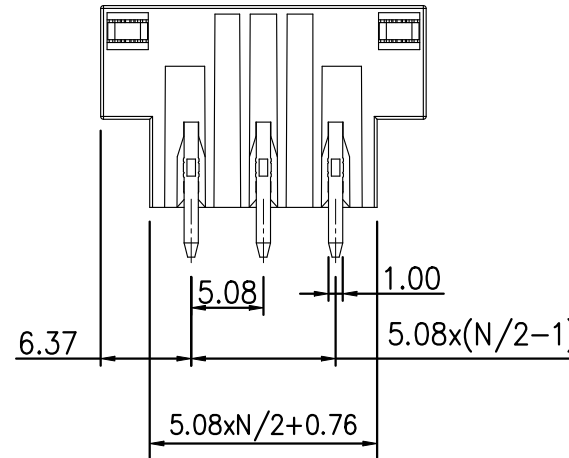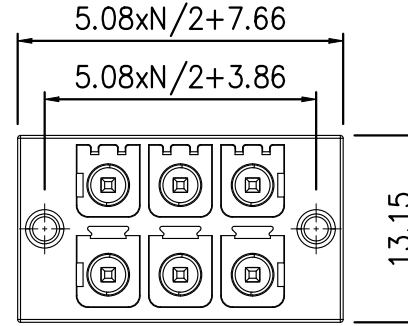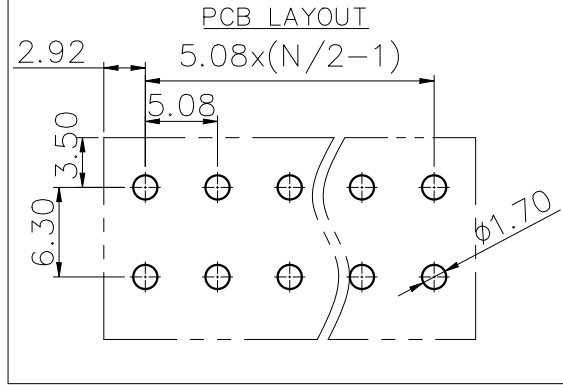

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		2024.03.07

3	Nut	Steel	Zn Plated
2	Contact Pin	Copper	Sn Plated
1	Housing	PA66+GF	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DRAW	WH.LU	SCALE	FIT	JiLN ® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD			
		UNIT	mm				
CHECK	W.CHEN	SIZE	A4	PART NO.	JL2EDGVHCM-508XXXXX		
		SHEET	1/1	TITLE:	JL2EDGVHCM-THR-5.08-2XNP 插拔式公座/直脚/带耳		
APPROVE	LC.LIU	PROJ.	DATE OF ISSUE:	2024.03.07	REV:	A0	