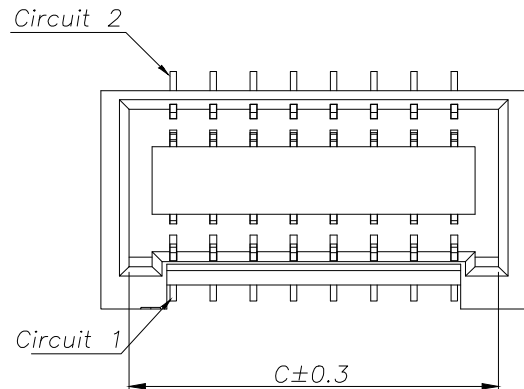

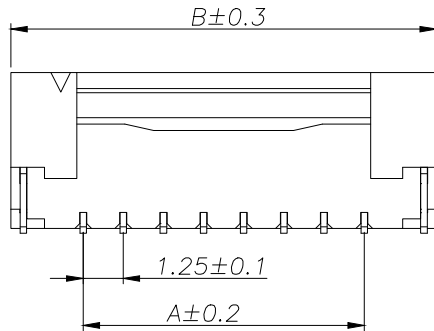
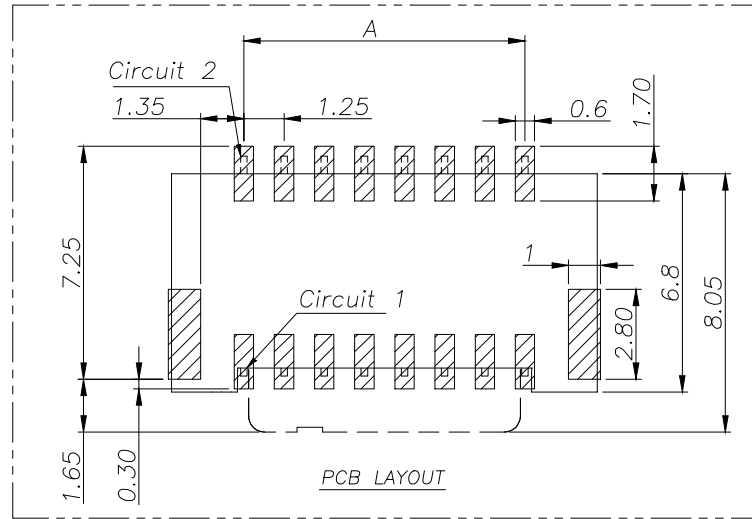
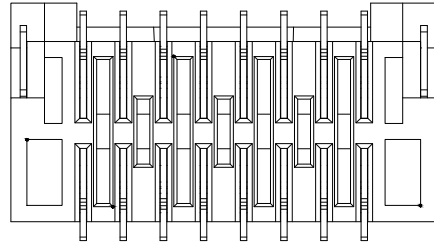


SPECIFICATIONS

- Current Rating: 1.25A AC, DC
 - Voltage Rating: 50V AC, DC
 - Temperature Range: -25°C~ +85°C
 - Contact Resistance: 50mΩ Max
 - Insulation Resistance: 100mΩ Min
 - Withstanding Voltage: 500V AC/minute
 - Material: LCP UL94-VO
- PIN Brass Tin-plated
Solder pad Phosphoric bronze Tin-plated

Circuit	Part NO.	Dimensions mm		
		A	B	C
2	XD-GHD-2x2PLT-X-05	1.25	5.75	4.00
3	XD-GHD-2x3PLT-X-05	2.50	7.00	5.25
4	XD-GHD-2x4PLT-X-05	3.75	8.25	6.50
5	XD-GHD-2x5PLT-X-05	5.00	9.50	7.75
6	XD-GHD-2x6PLT-X-05	6.25	10.75	9.00
7	XD-GHD-2x7PLT-X-05	7.50	12.00	10.25
8	XD-GHD-2x8PLT-X-05	8.75	13.25	11.50
9	XD-GHD-2x9PLT-X-05	10.00	14.50	12.75
10	XD-GHD-2x10PLT-X-05	11.25	15.75	14.00
11	XD-GHD-2x11PLT-X-05	12.50	17.00	15.25
12	XD-GHD-2x12PLT-X-05	13.75	18.25	16.50
13	XD-GHD-2x13PLT-X-05	15.00	19.50	17.75
14	XD-GHD-2x14PLT-X-05	16.25	20.75	19.00
15	XD-GHD-2x15PLT-X-05	17.50	22.00	20.25
16	XD-GHD-2x16PLT-X-05	18.75	23.25	21.50
17	XD-GHD-2x17PLT-X-05	20.00	24.50	22.75
18	XD-GHD-2x18PLT-X-05	21.25	25.75	24.00
19	XD-GHD-2x19PLT-X-05	22.50	27.00	25.25
20	XD-GHD-2x20PLT-X-05	23.75	28.25	26.50

Ordering Information

XD - GHD - 2xN *** - * - 05

Pin Type Colour
Pin 1: 1.25mm
Pin 2: 1.25mm
Pin 3: 1.25mm
Pin 4: 1.25mm
Pin 5: 1.25mm
Pin 6: 1.25mm
Pin 7: 1.25mm
Pin 8: 1.25mm
Pin 9: 1.25mm
Pin 10: 1.25mm
Pin 11: 1.25mm
Pin 12: 1.25mm
Pin 13: 1.25mm
Pin 14: 1.25mm
Pin 15: 1.25mm
Pin 16: 1.25mm
Pin 17: 1.25mm
Pin 18: 1.25mm
Pin 19: 1.25mm
Pin 20: 1.25mm

			GENERAL TOLERANCE	制图	05				
			DIM TOL	审核					
			X.X ±0.30	批准					
			X.XX ±0.20	比例					
			X.XXX ±0.10	SCALE					
			Angle ±3.0°	投影					
序号	变更内容	日期		投影		产品名称	GHD (1.25) 双排立贴	版本	A
No.	MODIFY CONTENT	MODIFY DATE		Projection		TITLE		REV.	
1	初版发行					产品料号	XD-GHD-2xNPLT-X-05	单位	mm
						PART NO.		页次	1/1
						MATERIAL		SHEET	



深圳讯答科技有限公司
ShenzhenXundaTechnology Co.,Ltd