

NOTES1:	
3	UL Standard
1	1.Rated voltage/current : 300V / 8A
2	2.Withstanding voltage : AC1500V/1Min.
3	3.Wire range : 28~16AWG

UL Standard

1.Rated voltage/current : 300V / 8A

2.Withstanding voltage : AC1500V/1Min.

3.Wire range : 28~16AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	8A

2.Wire diameter range : 0.2~1.0mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.81mm, Poles : N=02~24P
- 3.Stripping length : 10mm
- 4.Operating temperature: -40℃~+105℃
- 5.Undimensioned tolerances:





Pitch range in mm		Nominal dimension range in mm		Nominal dimension range		-	⌒	▮	
Over 6	Over 10	Over 30	Over 60	Over 100	Over 150	0.1/10			
TO 10	TO 24	TO 30	TO 60	TO 100	TO 150				
6	10	24	30	60	100	≤			
±0.15		±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

5.RoHS Compliance

Ordering Information

JL15EDGKN - 1000A - 381 XX X X X

Pitch 381=3.81Pitch No.of pins 2P~24P Housing Color B=Black G=Green(Convention) U=Blue R=Red W=White Y=Yellow O=Orange E=Grey Packing 0=Pe bag A=Troy T=Tube

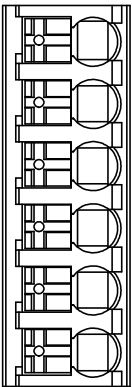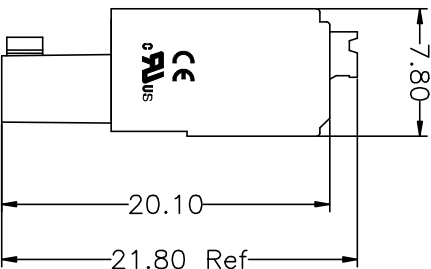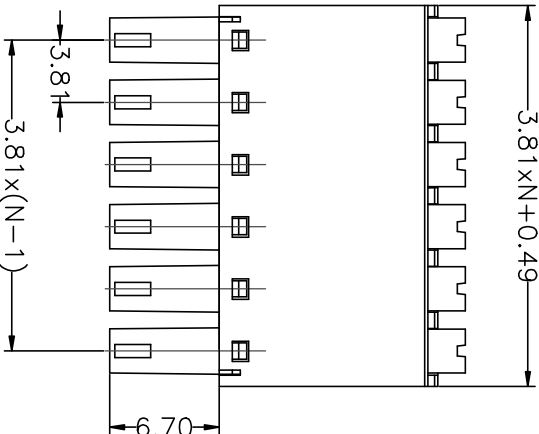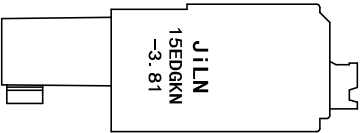

DRAW	SP.ZHENG	SCALE	FIT	jiln® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD			
		UNIT	mm				
CHECK	W.CHEN	SIZE	A4				
APPROVE	J.CHEN	SHEET	1/1				
		PROJ.					
		PART NO.	JL 15EDGKN-1000A-381XXXXX				
		TITLE:	JL15EDGKN-3.81-1000A-XXP 插拔式母座/ 方形按钮				

JILIN® 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD