
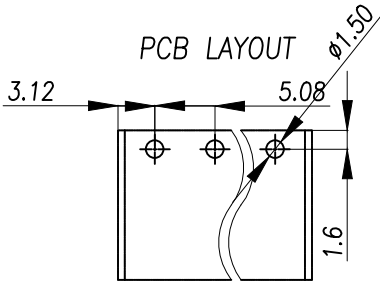
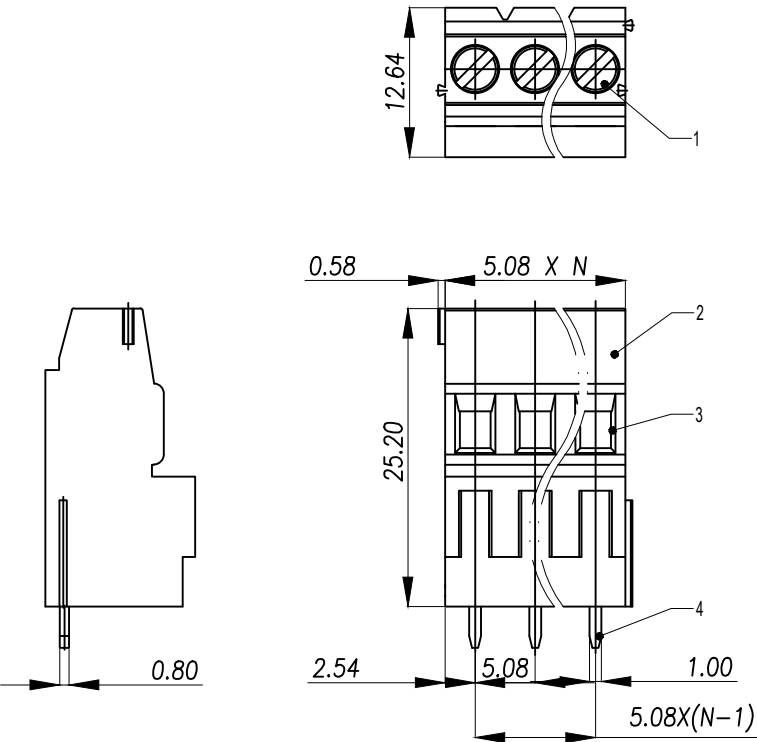


General tolerances(mm)														0.1/10 ±2'
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

Please refer to the 3D model
for those unmarked dimensions

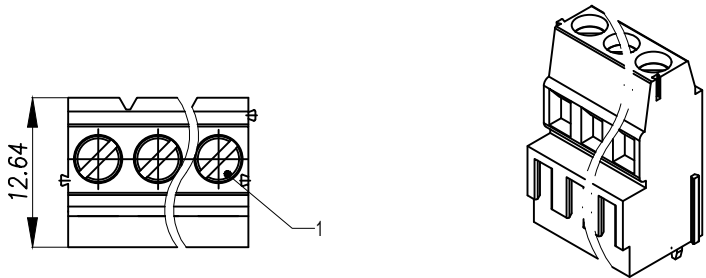

4	Pin header	Copper alloy	Sn Plated
3	Cage	Copper Alloy	M3/Ni Plated
2	Housing	PA66	UL94V-0
1	Screw	Steel	M3/Zn Plated
ITEM	NAME OF PART	MATERIAL	NOTES

制图 DRAWN	变更内容 DESCRIPTION	日期 DATE	GENERAL TOLERANCE	制图 DRAWING	Yu	料号 PART NO.	ZX-DG28V-5.08-NP	版本 REV.	A
				审核 CHECK	HUANG	品名 TITLE	DG500H-5.08	页次 SHEET	1/1
				核准 APPROVAL	RUAN	客户料号 CUTM.NO.		 兆星精密电子（深圳）有限公司 ShenZhen ZhaoXing Precision electronics Co., Ltd.	
				单位 UNITS	MM	比例 SCALE	1:1		