

Dual N-channel Enhancement Mode Power MOSFET

Features

- Advanced Trench Technology
- Excellent $R_{DS(ON)}$ and Low Gate Charge
- Lead free product is acquired
- 100% UIS TESTED!
- 100% ΔV_{ds} TESTED!

Product Summary


Parameters	Value	Unit
V_{DSS}	60	V
$V_{GS(th)_{Typ}}$	1.6	V
$I_D(@V_{GS}=10V)$	20	A
$R_{DS(ON)_{Typ}}(@V_{GS}=10V)$	29	m Ω

Applications


- Load Switch
- PWM Application
- Power Management



SOP8 Top View



Marking



Schematic Diagram

Ordering Information

Device	Marking	Package	Packing	Reel Size	Tape Width	Reel (pcs)
ZK60N20DS	60N20D	SOP8	Reel	N/A	N/A	3000

MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter		Symbol	Limit	Unit
Drain-Source Voltage		V_{DS}	60	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current	$T_C = 25^{\circ}\text{C}$	I_D	20	A
	$T_C = 100^{\circ}\text{C}$		10	
Pulsed Drain Current		I_{DM}	80	A
Single Pulsed Avalanche Energy		E_{AS}	25	mJ
Power Dissipation		P_D	34.7	W
Thermal Resistance from Junction to Ambient		$R_{\theta JA}$	61	$^{\circ}\text{C/W}$
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 175	$^{\circ}\text{C}$

MOSFET ELECTRICAL CHARACTERISTICS

$T_a=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Off characteristics						
Drain-source breakdown voltage	V _{(BR) DSS}	V _{GS} = 0V, I _D = 250μA	60			V
Zero gate voltage drain current	I _{DSS}	V _{DS} = 60V, V _{GS} =0V			1.0	μA
Gate-body leakage current	I _{GSS}	V _{DS} = 0V, V _{GS} =±20V			±100	nA
On characteristics						
Gate-threshold voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250uA	1.0	1.6	2.5	V
Static drain-source on-sate resistance	R _{DS(on)}	V _{GS} =10V, I _D =10A		29	33	mΩ
		V _{GS} =4.5V, I _D =5A		35	43	mΩ
Dynamic characteristics						
Input capacitance	C _{iss}	V _{DS} =30V, V _{GS} =0V f =1MHz		1220		pF
Output capacitance	C _{oss}			68		
Reverse transfer capacitance	C _{rss}			49		
Gate resistance	R _G	f =1MHz		1.2		Ω
Switching characteristics						
Total gate charge	Q _g	V _{GS} =0 to 10V V _{DS} =30V, I _D =10A		22		nC
Gate-source charge	Q _{gs}			4.2		
Gate-drain charge	Q _{gd}			6.9		
Turn-on delay time	t _{d(on)}	V _{DS} =30V, I _D =10A V _{GS} =10V, R _{GEN} =3Ω		6.4		ns
Turn-on rise time	t _r			15.3		
Turn-off delay time	t _{d(off)}			25		
Turn-off fall time	t _f			7.6		
Drain-Source Diode Characteristics						
Drain-source diode forward voltage	V _{SD}	V _{GS} =0V, I _S =10A			1.2	V
Continuous drain-source diode forward current	I _S				20	A
Reverse recovery time	t _{rr}	di/dt = 100A/μs, I _F = 10A		26		ns
Reverse recovery charge	Q _{rr}			45		nC

Notes:

1. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)} = 150^{\circ}\text{C}$
2. The EAS data shows Max. rating . The test condition is $V_{DD} = 25V, V_{GS} = 10V, L = 0.4mH, I_{AS} = 14A$
3. The data tested by surface mounted on a 1 inch2 FR-4 board with 20Z copper, The value in any given application depends on the user's specific board design.
4. The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
5. This value is guaranteed by design hence it is not included in the production test.

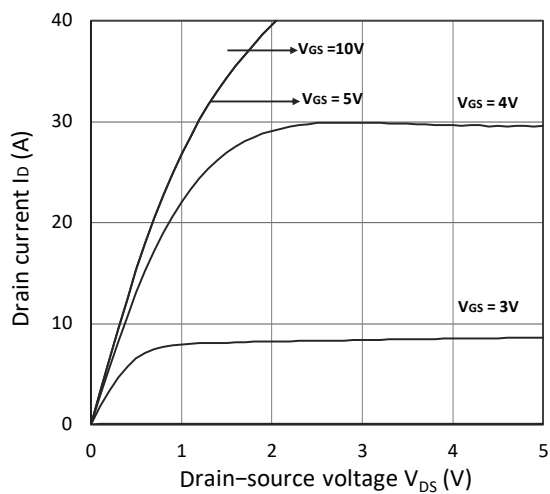


Figure 1. Output Characteristics

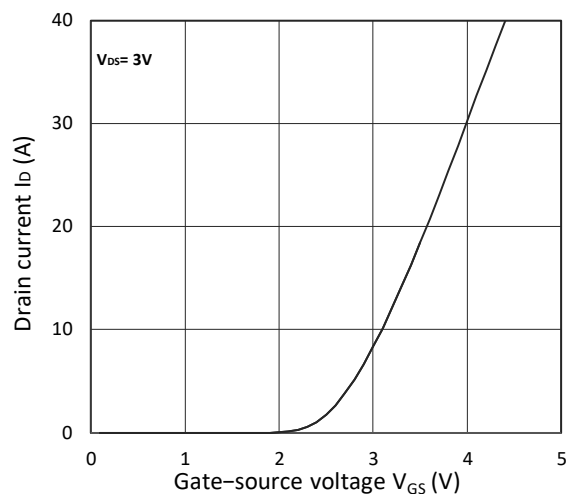


Figure 2. Transfer Characteristics

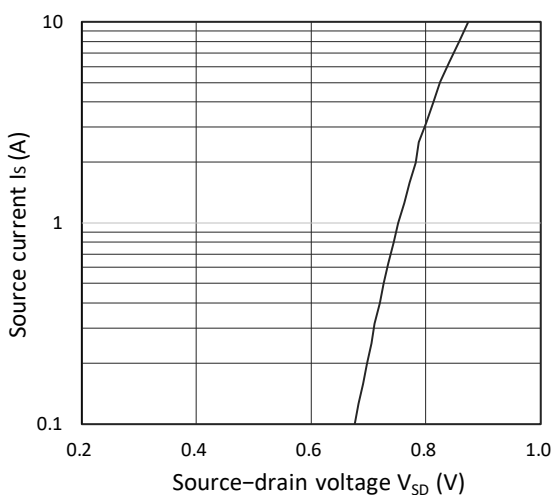


Figure 3. Forward Characteristics of Reverse

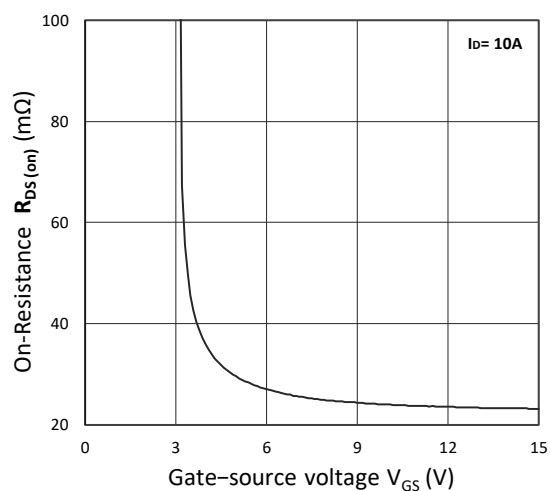


Figure 4. $R_{DS(ON)}$ vs. V_{GS}

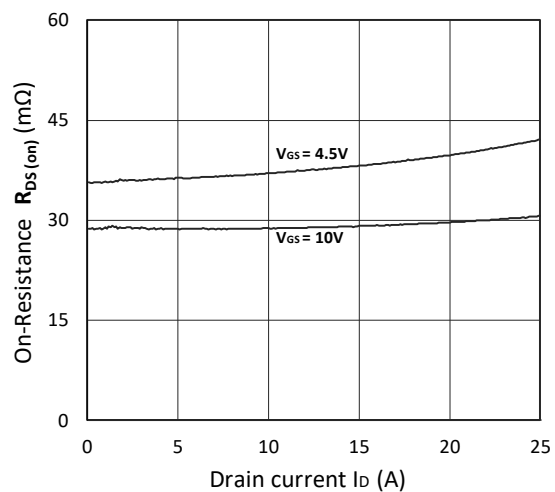


Figure 5. $R_{DS(ON)}$ vs. I_D

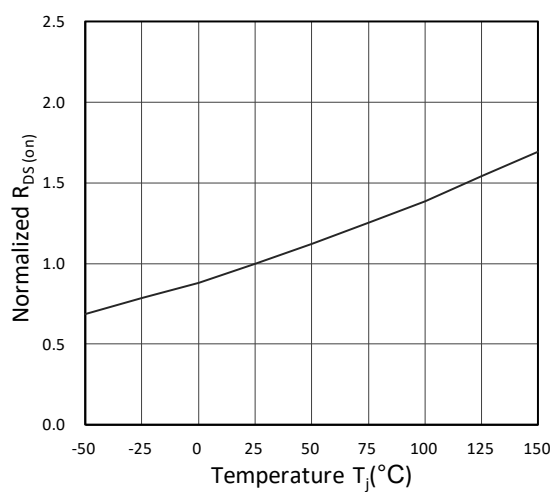


Figure 6. Normalized $R_{DS(ON)}$ vs. Temperature

Typical Characteristics

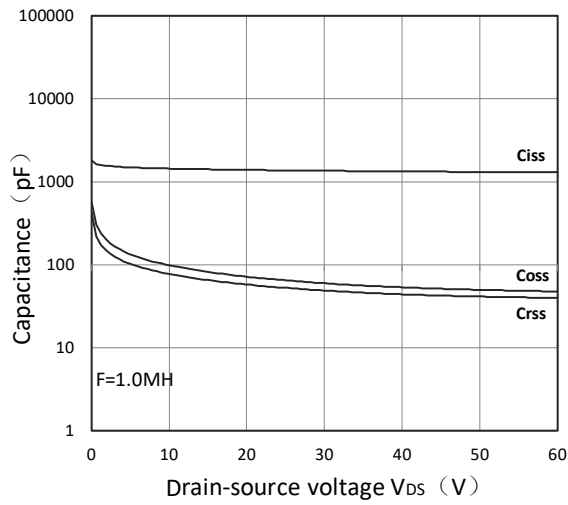


Figure 7. Capacitance Characteristics

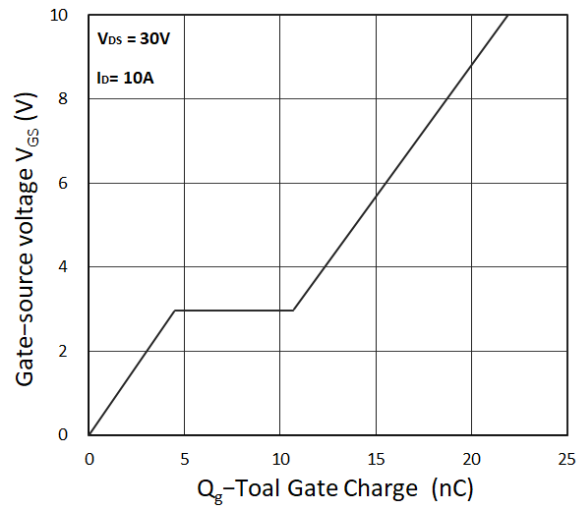


Figure 8. Gate Charge Characteristics

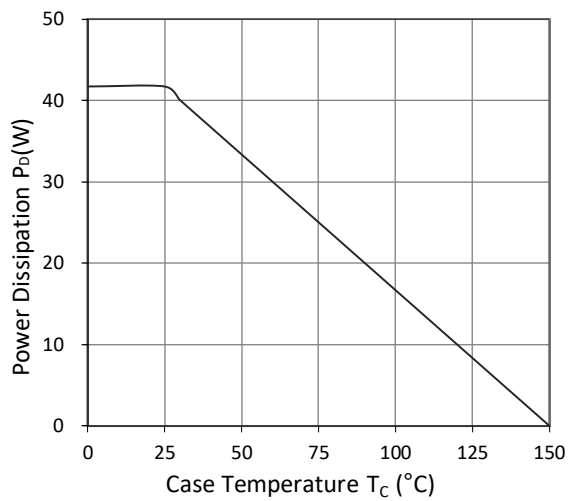


Figure 9. Power Dissipation

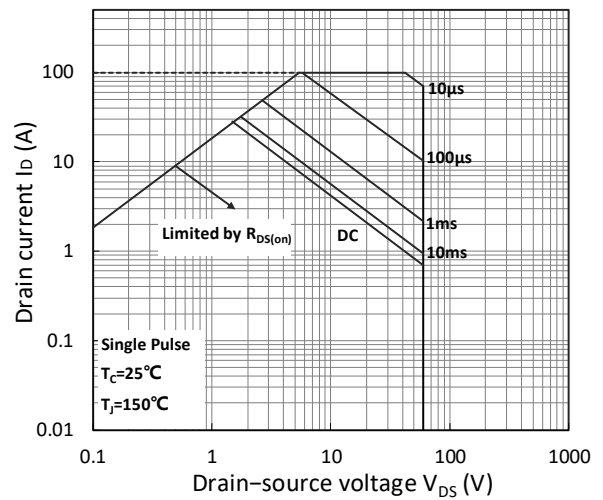


Figure10. Safe Operating Area


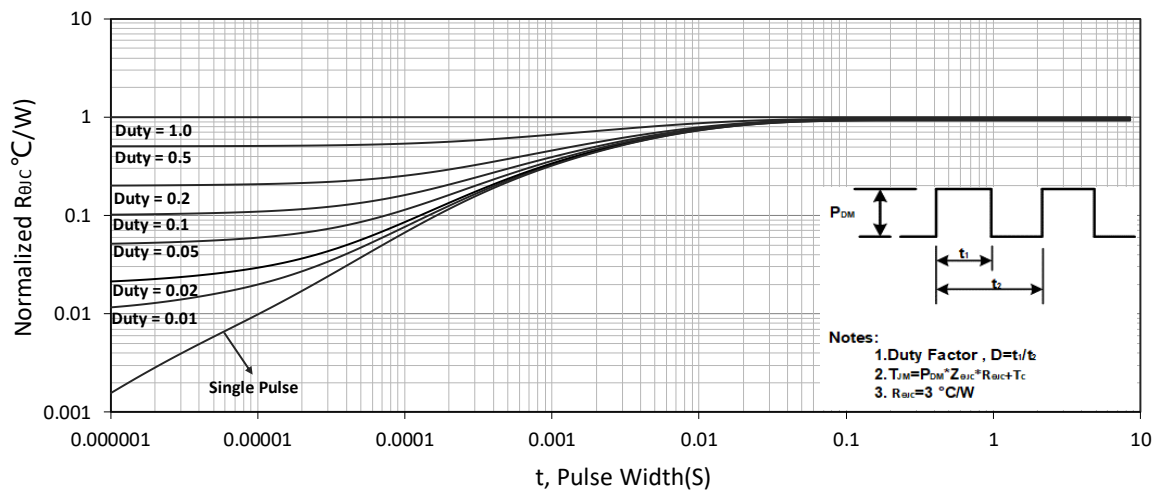


Figure 11. Normalized Maximum Transient Thermal Impedance

Package Mechanical Data(SOP-8)

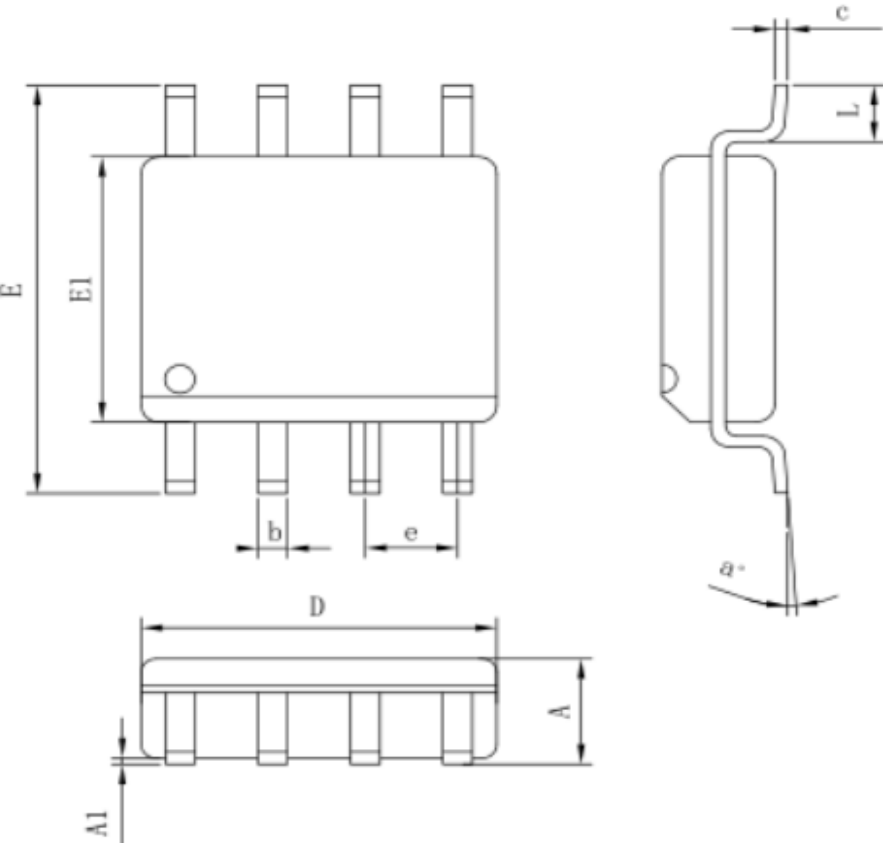

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	--	--	1.75
A1	0.10	--	0.23
b	0.35	--	0.48
c	0.19	--	0.25
D	4.70	4.90	5.00
E	5.80	6.00	6.20
E1	3.70	3.90	4.10
e	1.27BSC		
L	0.50	--	0.80
α°	0°	--	8°