

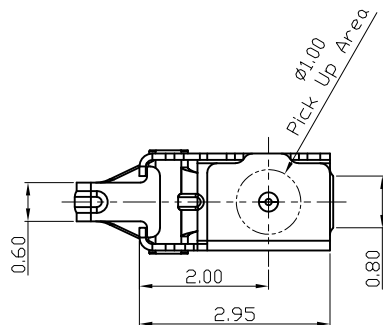
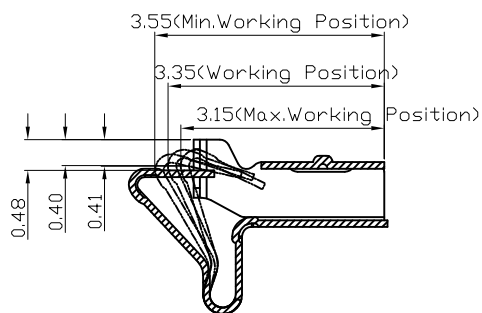
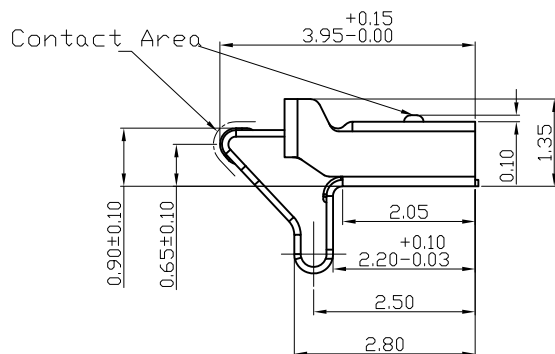


3D View

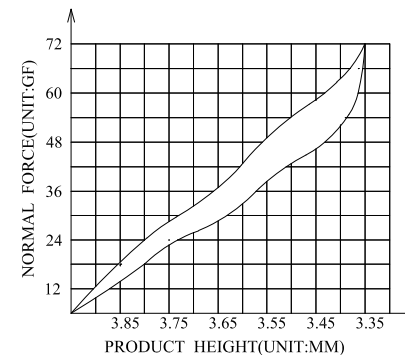


(For Reference Only)
Stated At Compression




NOTES:


- 1:MATERIAL
1-1: C5210 THICKNE=0.10MM
- 2:SPECIFICATIONS
2-1: RATED CURRENT: 2.0A
2-2: VOLTAGE RATING: 1.5V
2-3: CONTACT RESISTANCE: 50mΩ/MAX
2-4: WELDING THRUST: ≥3KG
2-5: OPERATING TEMPERATURE: -40°C~+85°C
2-6: NORMAL FORCE: 70±15g @WORKING POSITION
- 3:DURABILITY: 150 CYCLES
- 4:SALT SPRAY TIME: 48H
- 5:ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 50u" MIN
- 6:REQUIREMENTS
6-1:TERMINAL TO EAT FULL TIN,NOTPEELING,
WELDING OBVIOUS COLOR AND OTHED ADVERSE
6-2:ROHS、REACH、HF HALOGER ADVERSE OF DOMESTIC
AND INTERNATIONAL ENVIRONMNTAL REQUIREMENTS



RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)



METAL MASK T=0.08
TOLERANCE:±0.05MM
(FOR REFERENCE ONLY)



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 侧压弹片 L2.70*W1.60*H4.00	
 UNIT: mm [inch]		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYCW-TXT271640A
		APPROVED BY:	DATE :	MOLD NO.	
		邱敏	2014-02-23	DRAW NO:	HYC-2412201046
SCALE:1:1	SIZE: A4			SHEET NO.	1 OF 1