
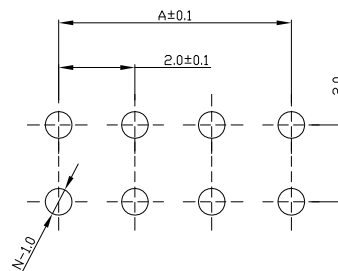
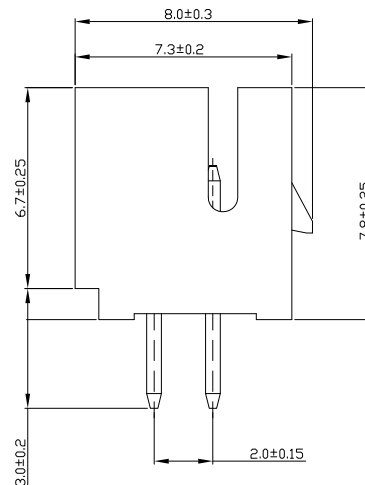
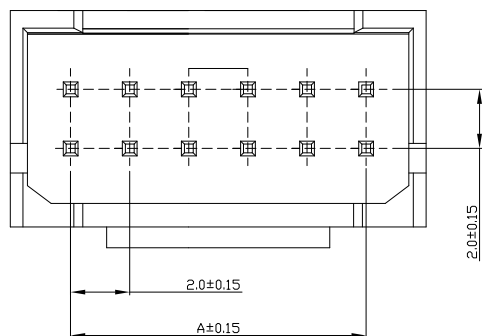


RoHS

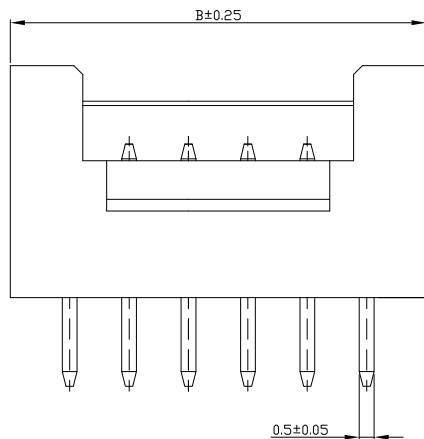

PCB参考图

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000mΩ Min
- 6、Withstanding Voltang: 800V AC/minute
- 7、Material:Wafer PA46
PIN Brass Tin-plated

编 号	尺寸 (mm)	
	A	B
PHB-2*02A	2.00	6.00
PHB-2*03A	4.00	8.00
PHB-2*04A	6.00	10.00
PHB-2*05A	8.00	12.00
PHB-2*06A	10.00	14.00
PHB-2*07A	12.00	16.00
PHB-2*08A	14.00	18.00
PHB-2*09A	16.00	20.00
PHB-2*10A	18.00	22.00
PHB-2*11A	20.00	24.00
PHB-2*12A	22.00	26.00
PHB-2*13A	24.00	28.00
PHB-2*14A	26.00	30.00
PHB-2*15A	28.00	32.00
PHB-2*16A	30.00	34.00
PHB-2*17A	32.00	36.00
PHB-2*18A	34.00	38.00
PHB-2*19A	36.00	40.00
PHB-2*20A	38.00	42.00

GENERAL TOLERANCE		制 图	H Y			料 号	PHB-2*NA		版 本	A				
X.±0.25	X.'±2°	审 核	L P J			PART NO.			REV.					
.X±0.20	.X'±1°					品 名	PHB带扣直针							
.XX±0.15	.XX'±0.5°	核 准	L Z W			浙江富港电子有限公司								
.XXX±0.10	.XXX'±0.5°	单 位	MM	比 例	1:1									
		UNITS	MM	SCALE										

浙江富港电子有限公司