


Specifications(规格):

- 1.Impedance(特性阻抗) : 100Ω;
- 2.Frequency (工作频率) : DC~2GHz;
- 3.Return Loss (回波损耗) : ≥ 20dB @1GHz;
- 4.Insulation resistance(绝缘阻抗) : ≥100MΩ;
- 5.Dielectric withstand voltage (介质耐电压) : 250V AC;
- 6.Mating cycles (耐久性) : ≥25 cycles;
- 7.Retention force latch(保持力) : ≥110N;
- 8.Temperature range(使用温度): -40℃~+105℃;


PART NO.:

XZ 5 X - H14M- XXXX -H14F-X X
①② ② ③④

- ① Cable Type: HSD 535;
- ② Successive number: 1~Z;
- ③ Length(mm): 1000=1000mm
- ④ Coding A: A~Z
- ⑤ Coding B: A~Z

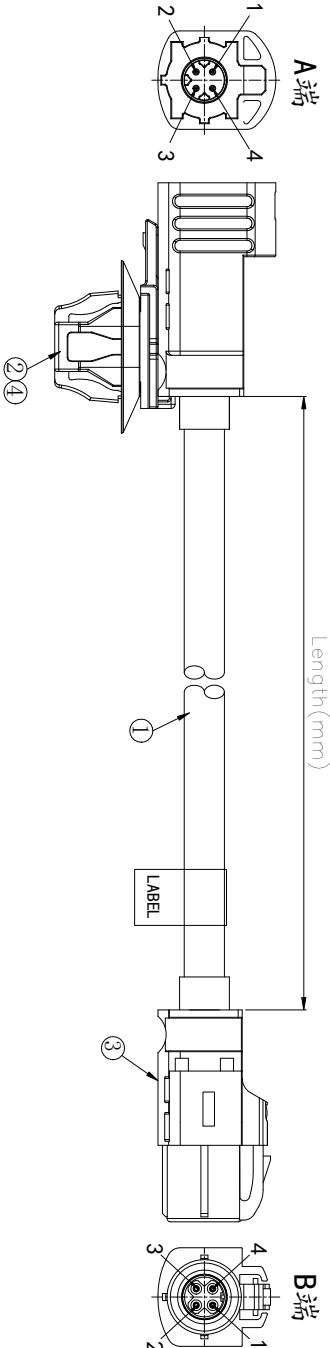


Wiring Table

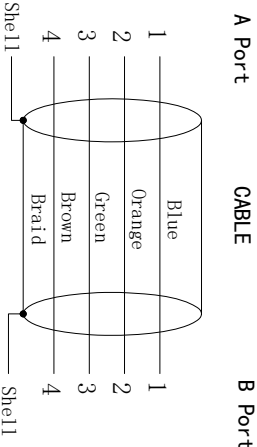

PART NO.	Length (mm/inch)	TOLERANCES (mm/inch)
XZ5K-H14M-500-H14F-ZZ	500 [19.685]	±10 [0.394]
XZ5K-H14M-1000-H14F-ZZ	1000 [39.370]	±15 [0.591]
XZ5K-H14M-1500-H14F-ZZ	1500 [59.055]	±15 [0.591]
XZ5K-H14M-2000-H14F-ZZ	2000 [78.740]	±20 [0.787]

4	Clip	Connector Clip: CC20SFT7	1 PCS	
3	Connector	HSD4P Female connector,Z code	1 SET	
2	Connector	HSD4P Male connector,Z code,带卡槽	1 SET	
1	Cable	LEON Docar® 535 Cable PVC ODø4.6±0.3mm Black	1 PCS	
NO.	Name	SPEC.	QTY	NOTE
www.helloxkb.com www.helloxkb.cn www.xk-da.cn				

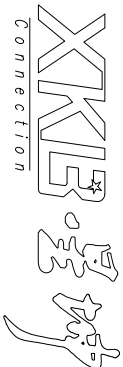

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A0