

## SUMMARY

### # Wires

Low voltage 26



*Image is for illustrative purpose only*

|                  |                                   |
|------------------|-----------------------------------|
| Series           | 2B                                |
| Termination type | Female print PCB                  |
| IP rating        | 50                                |
| AWG wire size    | 34.00 - 28.00                     |
| Cable Ø          | 0.00 - 0.00 mm                    |
| Status           | active                            |
| Matching parts   | <a href="#">FGA.2B.326.CLAD62</a> |

### Download

[Request a quote](#)  
[PCB Eagle Pattern](#)  
[PCB Altium Pattern](#)  
[PCB KiCad Pattern](#)  
[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

|                   |                                                                                                                               |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Shell Style/Model | EC*: Fixed receptacle with two nuts and straight contacts for printed circuit (back panel mounting)                           |
| Keying            | 2 keys (alpha=30, plug: male contacts, receptacle: female contacts)                                                           |
| Housing Material  | Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces |
| Weight            | 14.65 g                                                                                                                       |

### Performance

|               |                           |
|---------------|---------------------------|
| Configuration | 2B.326 : 26 Low Voltage   |
| Insulator     | L: PEEK (UL 94 / V-0/1.5) |
| Rated Current | 2 Amps                    |

### Specifications


Contact Type: Print (straight)  
Contact Dia.: 0.5 mm (0.02in)  
R (max): 8.7 mOhm  
Vtest (contact-shell): 1300 V (AC), 1840 V (DC)  
Vtest (contact-contact): 950 V (AC), 1340 V (DC)

### Others

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Endurance (Shell): 5000  
Temp (min / max): -55°C / +250°C  
Humidity (max): <=95% [at 60 deg C / 140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]  
Climatical Category: 50/175/21  
Shielding (min): 75 dB (10 MHz)  
Shielding (min): 40 dB (1 GHz)  
Salt Spray Corrosion: >1000 hr

## DRAWINGS

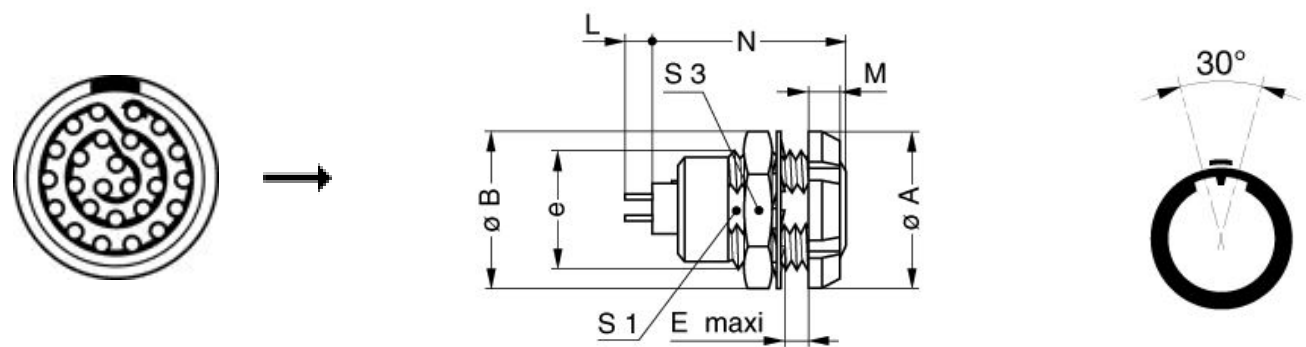

### Dimensions

|     | A    | B    | E    | L    | M    | N    | S1   | S3   | e       |
|-----|------|------|------|------|------|------|------|------|---------|
| mm. | 20   | 19.2 | 6.5  | 24.8 | 3.5  | 21.5 | 13.5 | 17   | M15x1.0 |
| in. | 0,79 | 0,76 | 0,26 | 0,98 | 0,14 | 0,85 | 0,53 | 0,67 |         |

## RECOMMENDED BY LEMO

### Tools

Spanner 2: [DCH.91.201.PA](#)

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*