
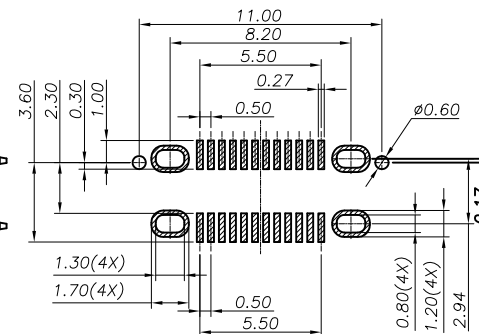
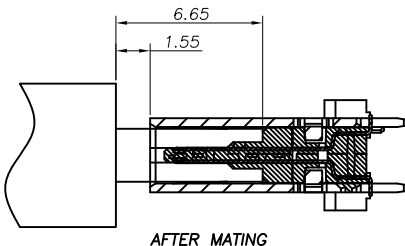








Technical drawing of a component with the following dimensions and tolerances:

- Overall length: 12.00 mm (dimension $*c$)
- Overall width: 5.00 mm (dimension $*b$)
- Overall height: $8.34^{+0.06}_{-0.02}$ mm (dimension $*a$)
- Internal width: 2.56 ± 0.04 mm (dimension $*b$)
- Internal height: 12.00 mm (dimension $*c$)
- Internal width: $8.34^{+0.06}_{-0.02}$ mm (dimension $*a$)

The drawing shows a cross-section of a component with a central rectangular hole. The hole has a width of 12.00 mm and a height of 2.56 ± 0.04 mm. The component has a total width of 5.00 mm and a total height of $8.34^{+0.06}_{-0.02}$ mm. The internal width of the hole is $8.34^{+0.06}_{-0.02}$ mm. The drawing also shows a top view of the component with dimensions 12.00 mm (width) and $8.34^{+0.06}_{-0.02}$ mm (height). The drawing is labeled with dimensions $*a$, $*b$, and $*c$.




RECOMMENDED PCB LAYOUT(TOP VIEW)
THICKNESS 1.0±0.10MM;DEFAULT TOLERANCE:±0.05

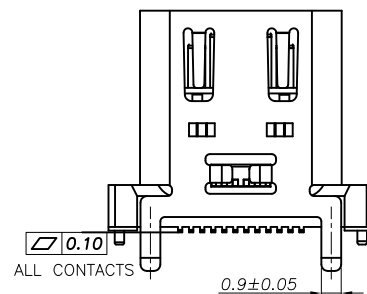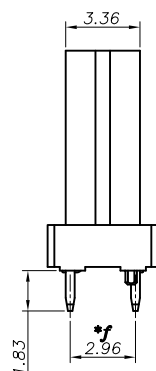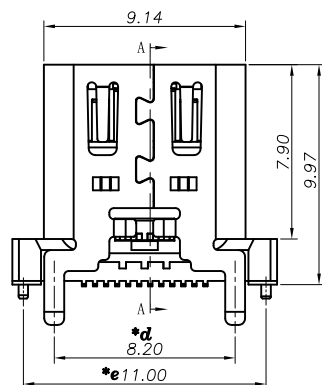

WITH PICK UP COVER

8. Sign* "is importance dimension.

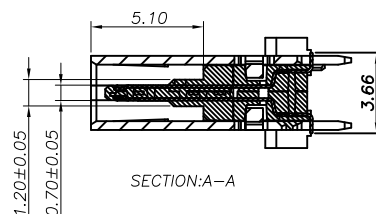

TID:7970

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

8					TOLERANCE UNLESS SPECIFIED	A0	2024.12.05	首次发行	LP	
7					<1.5: ±0.1mm >1.5~5.0: ±0.25mm >5.0: ±0.3mm	ANGULAR ±1°				
6										
5										
4	FRONT SHELL	SUS	1	Ni-PLATED	TITLE: USB JACK	UNIT : MM	ROHS	DWN		
3	MID PLATE	SUS	1		MODEL: USB-307H-N-00	SCALE: 1:1	COMPLIANT	CHK'D		
2	TERMINAL	CUETP	24	Au-PLATED						
1	HOUSING	PA9T(UL94V-0)	1							
NO.	PART NAME	MATERIAL	QTY	FINISHING	 皓宇 HOOYA 东莞市弘皓电子有限公司			PRO.AGL:		REV : AC