

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A		NEW		22.12.15

NOTES1:

UL Standard

1.Rated voltage/current : 150V / 5A

2.Withstanding voltage : AC1250V/1Min.

3.Wire range : 30~20AWG

IEC Standard

1.

Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	320V
Rate current(A)	6A

2.Wire range : 0.2~0.5mm²

NOTES2:

1.Dimension shall be interpreted per ASME Y14.5-2009






2.Pitch : 3.5mm, Poles : N=04~48P

3.Stripping length : 7~8mm

4.Operating temperature: -40℃~+105℃

5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm						—	∩	∇
TO	Over	Over	TO	Over	Over	Over	Over		0.1/10		
6	6 TO 10	10 TO 24	30	30 TO 60	60 TO 100	100 TO 150	150			∠	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30			±2°	

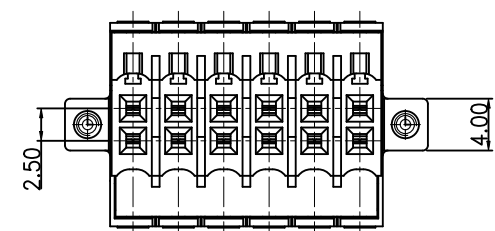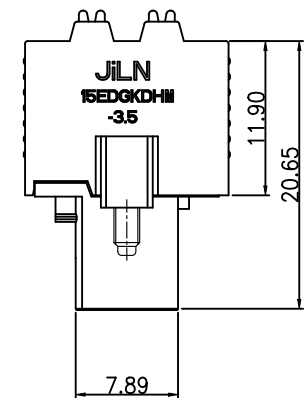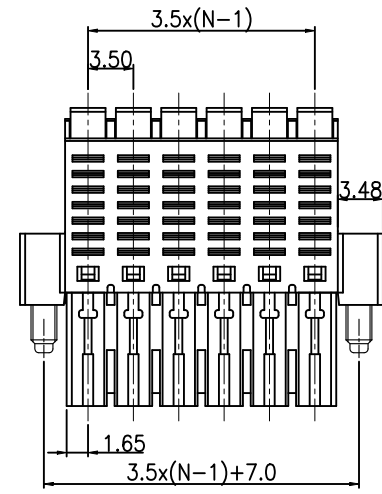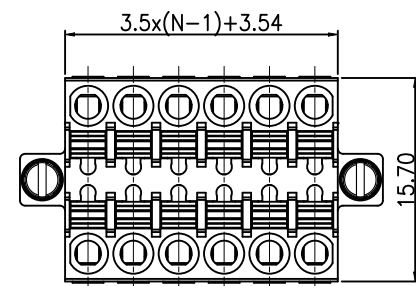

6.RoHS Compliance

Ordering Information

JL15EDGKDHM - 350 XX X XX

Pitch 350=3.5PH

No.of pins 2x2P~2x24P
02=2x2P
03=2x3P
04=2x4P
...

Housing Color B=Black (Convention)
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Serial code

DRAW	Zheng. SP	SCALE	FIT	JILN [®] 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD	
		UNIT	mm		
		SHEET	1/1	PART NO.	JL15EDGKDHM-350XXXXX
		PROJ.		TITLE:	JL15EDGKDHM-3.5-2xNP插拔式母座/带耳