


NPN Plastic-Encapsulate Transistors

High-Voltage Fast-Switching

Applications :

♦Electronic Ballasts For Fluorescent Lighting And Changer

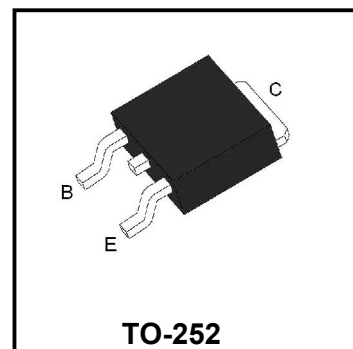

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	BV_{CBO}	700	V
Collector-Emitter Voltage	BV_{CEO}	480	V
Emitter-Base Voltage	BV_{EBO}	9	V
Collector Current	I_C	1	A
Collector Power Dissipation	P_C	1.2	W
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55~+150	°C

Electrical Characteristics (Ta=25°C)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	BV_{CBO}	$I_C = 100\mu A, I_E = 0$	700			V
Collector-emitter breakdown voltage	BV_{CEO}	$I_C = 1mA, I_B = 0$	480			V
Emitter-base breakdown voltage	BV_{EBO}	$I_E = 100\mu A, I_C = 0$	9			V
Collector cut-off current	I_{CBO}	$V_{CB} = 700V, I_E = 0$			1	mA
Collector cut-off current	I_{CEO}	$V_{CE} = 400V, I_B = 0$			10	mA
Emitter cut-off current	I_{EBO}	$V_{EB} = 9V, I_C = 0$			1	mA
DC current gain	h_{FE}	$V_{CE} = 2V, I_C = 0.5A$	8		40	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 0.5A, I_B = 0.1A$			0.5	V
Base -emitter saturation voltage	$V_{BE(sat)}$	$I_C = 0.5A, I_B = 0.1A$ $I_C = 1A, I_B = 0.25A$			1.0 1.2	V
Transition frequency	f_T	$V_{CE} = 10V, I_B = 0.1A$	8			MHz

Typical Characteristics

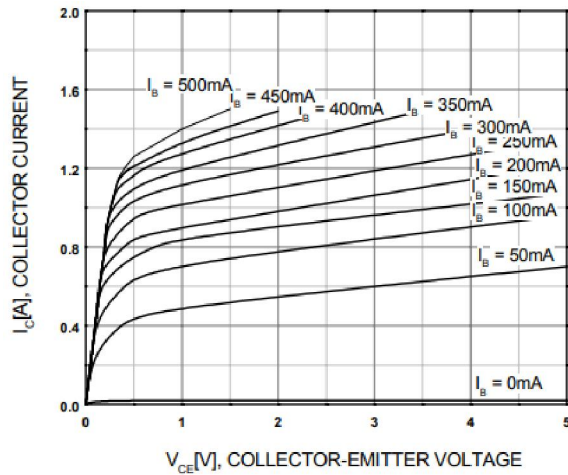


Figure 1. Static Characteristic

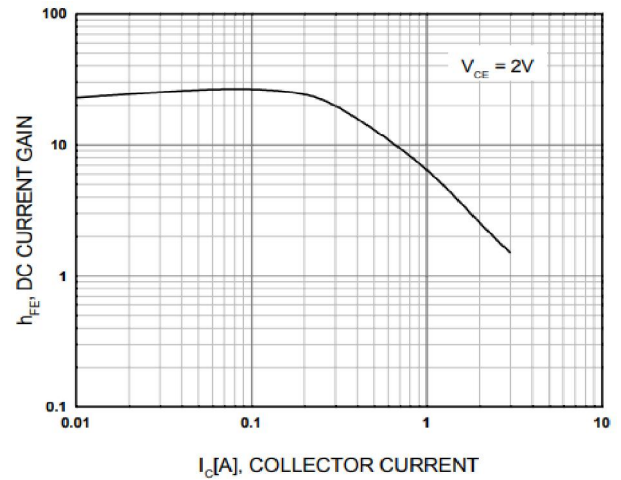


Figure 2. DC current Gain

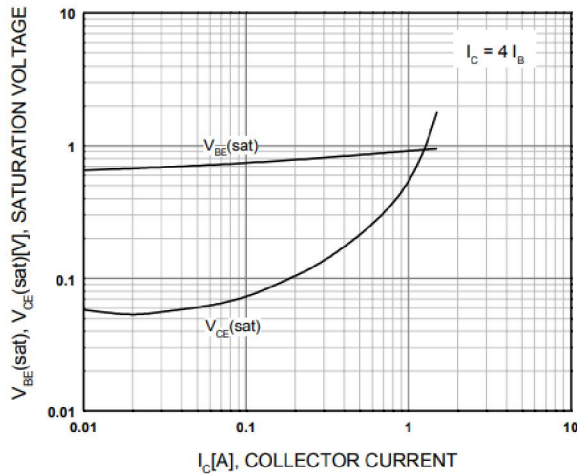


Figure 3. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

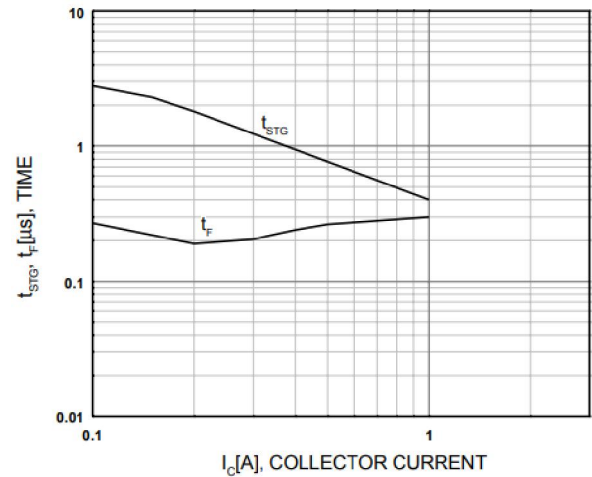


Figure 4. Switching Time

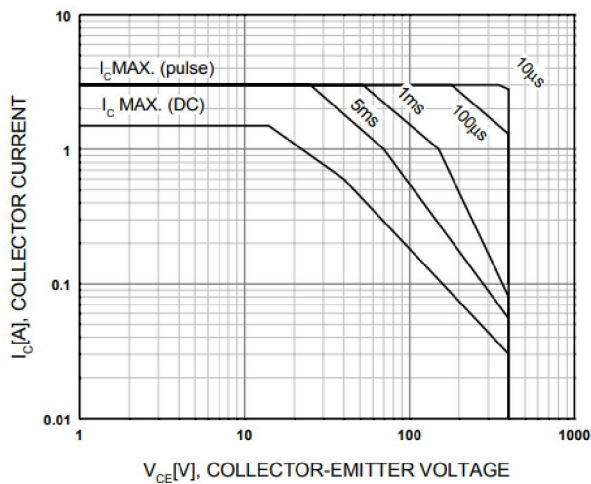


Figure 5. Safe Operating Area

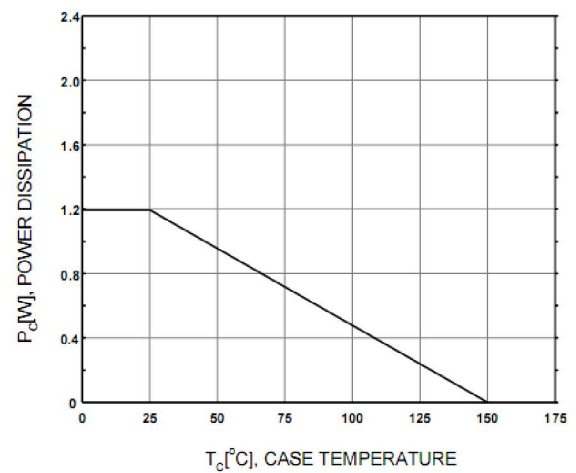


Figure 6. Power Derating

Package Dimensions

TO-252

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	2.20	2.50	0.087	0.094
A1	1.00	1.40	0.039	0.055
A2	0.00	0.15	0.000	0.006
b	0.50	0.70	0.020	0.028
b1	0.70	0.90	0.028	0.035
c	0.40	0.60	0.016	0.024
c1	0.40	0.60	0.016	0.024
D	6.20	6.70	0.244	0.264
D1	5.10	5.50	0.201	0.217
E	5.50	6.00	0.217	0.236
e	2.20	2.40	0.087	0.094
e1	4.40	4.80	0.173	0.189
L	9.70	10.40	0.382	0.409
L1	1.40	1.70	0.055	0.063
L2	0.60	1.20	0.024	0.047

Product Specification Classification

Part Number	Package	Marking	Pack
MJE13002	TO-252	YFW MJE13002 XXXXX	2500PCS/Tape