




ROHS

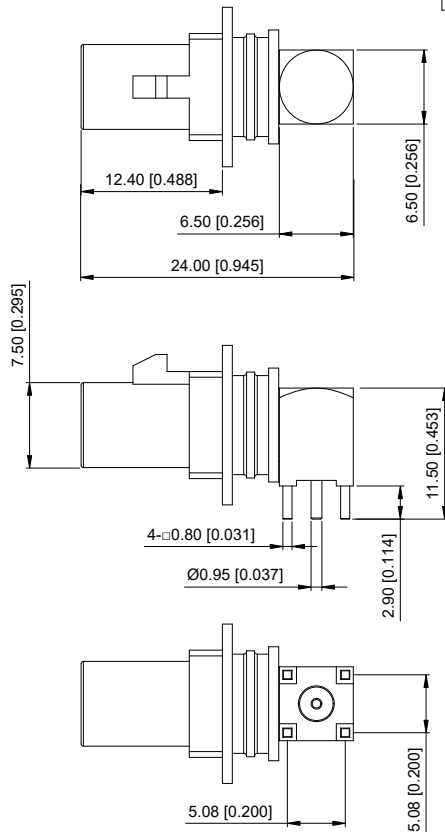

3D View

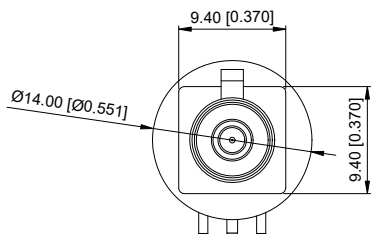


Specifications(规格):

- 1.Impedance(特性阻抗) : 50Ω;
- 2.Frequency (工作频率) : DC~4GHz;
- 3.Insulation resistance(绝缘阻抗) : $\geq 100\text{M}\Omega$;
- 4.Dielectric withstand voltage (介质耐电压) : 800V AC;
- 5.Mating cycles (耐久性) : ≥ 25 ;
- 6.Engagement force(啮合力) : $\leq 25\text{N}$;
- 7.Retention force latch(保持力) : $\geq 110\text{N}$;
- 8.Temperature range(使用温度) : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$;

PART NO.:

XK1PWM13-WS04-X

Code: A~Z



Recommended P.C.B Layout

7	Cover	Copper Alloy	Ni PLATED	1 PC	
6	Seal Ring	Silicon Rubber		1 PC	
5	Dielectric	PTFE		1 PC	
4	Body	Copper Alloy	Gold PLATED	1 PC	
3	Outer Conductor	Copper Alloy	Ni PLATED	1 PC	
2	Center Conductor	Copper Alloy	Gold PLATED	1 PC	
1	Housing	PA66		1 PC	
NO.	SPEC.	MATERIAL	FINISH (Contact)	Q'TY	Note

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn



DESIGN	希文	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

XKB INDUSTRIAL PRECISION CO.,LIMITED

ANGULAR	±5°	
X.	±0.50	
X.x	±0.30	
X.xx	±0.20	
X.xxx	±0.10	
UNSPECIFIED TOLERANCES		
MODEL TYPE:		
FAKRA Male R/A Connector IP67		
PART NO.:		
XK1PWM13-WS04-X		
DWG NO.:		
X-XK1PWM13-WS04-X		
SCALE	PAGE	REVISION
N/A	1/2	A0

