
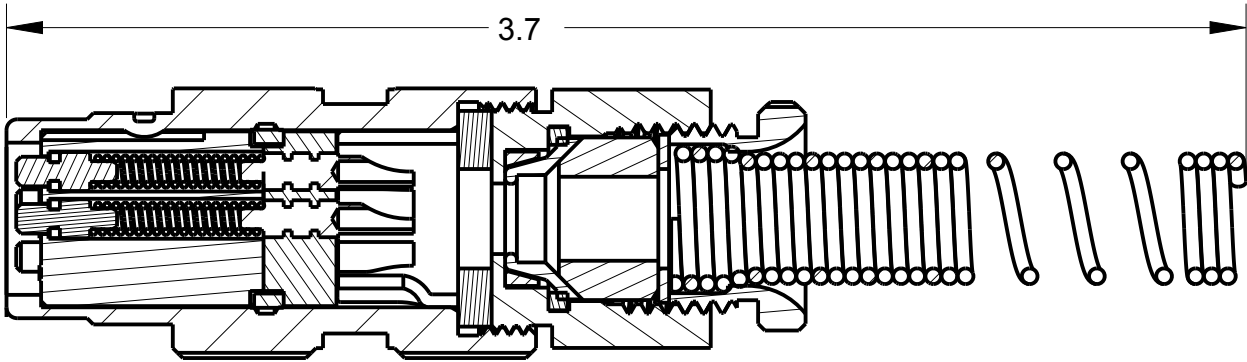
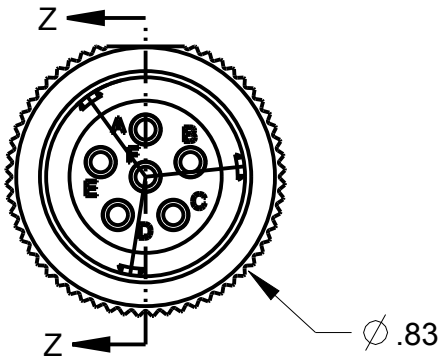


ITEM #	PART #	QTY	DESCRIPTION
1	AJ-156-11	1	HOUSING, JACK CABLE
2	AJ-166-30	1	INSERT, 6-COND SOLDER
3	AP-105-5	1	STRAIN RELIEF
4	AP-116-3	1	WASHER, RUBBER
5	AP-136-8	1	NUT ADAPTER WITH GASKET
6	AP-136-6	1	CLAMP, OUTER SHELL
7	AP-136-5	1	CLAMP, SHIELD INNER
8	SEE TABLE #1	1	BUSHING
9	SEE TABLE #1	1	WASHER
10	SEE TABLE #1	1	SPRING
11	AP-116-6	1	STUD

NOTES:
1) MARK PART NUMBER & MANUFACTURER'S NAME, LOCATED APPROX AS SHOWN

TABLE #1				
PART #	CABLE Ø	BUSHING	WASHER	SPRING
AJ-166S/14-1	Ø .165± .010	AP-116-17	AP-116-2	AP-116-4
AJ-166S/14-2	Ø .228± .010	AP-116-18	AP-116-2	AP-116-4
AJ-166S/14-3	Ø .250± .010	AP-116-8	AP-116-2	AP-116-4
AJ-166S/14-4	Ø .290± .010	AP-116-19	AP-116-2	AP-116-4
AJ-166S/14-5	Ø .320± .010	AP-116-20	AP-116-22	AP-116-21

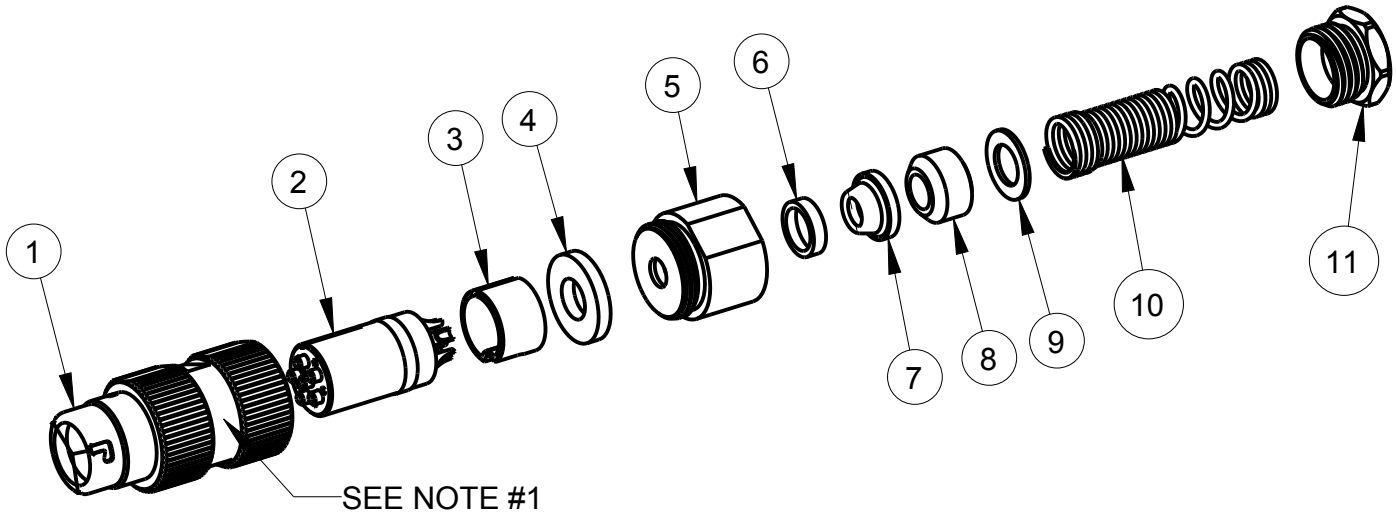

SECTION Z-Z

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF NEXUS, INCORPORATED AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF NEXUS.

D	ADD; AJ-166S/14-5; BILL OF MATERIAL	213	10/8 2014	HR
C	ADD; NOTE #1	118	1/11 2012	HR
B	ADD P/N CHART	106	5/24 2011	HR
A	INITIAL RELEASE		5/19/10	GPH
LET.	REVISION	CN #	DATE	CHK.

DWN.BY GPH	DATE 17-May-10	MATERIAL		
CHECKED BY	DATE	FINISH		
APPR.BY	DATE	WEIGHT —	SCALE = 2.00 :1	NEXUS STAMFORD,CONN
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES &/OR [mm] TOLERANCES: DECIMAL: .XX[X.X] .XXX[X.XX] ± .01[0.3] ± .003[0.08] FRACTION: X/X ± 1/64 ANGLES: .X ± .5°		TITLE JACK, 6 PIN, SOLDER CUP SHIELDED		
		DO NOT SCALE DWG.	SHEET 1 OF 1	
		SIZE B	DWG. NO. AJ-166S	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[AJ-166S/14-1](#) [AJ-166S/14-4](#) [AJ-166S/14-3](#) [AJ-166S/14-2](#) [AJ-166S/14-5](#)