



© 2022 TE Connectivity. All Rights Reserved.				REVISIONS					
P	LTR	DESCRIPTION			DATE	DWN	APVD		
	A	INITIAL RELEASE			26OCT22	E.C	Z.Z		
	B	REVISION (PCN-24-224062)			16DEC24	S.W	Z.Z		

D

C

B

A

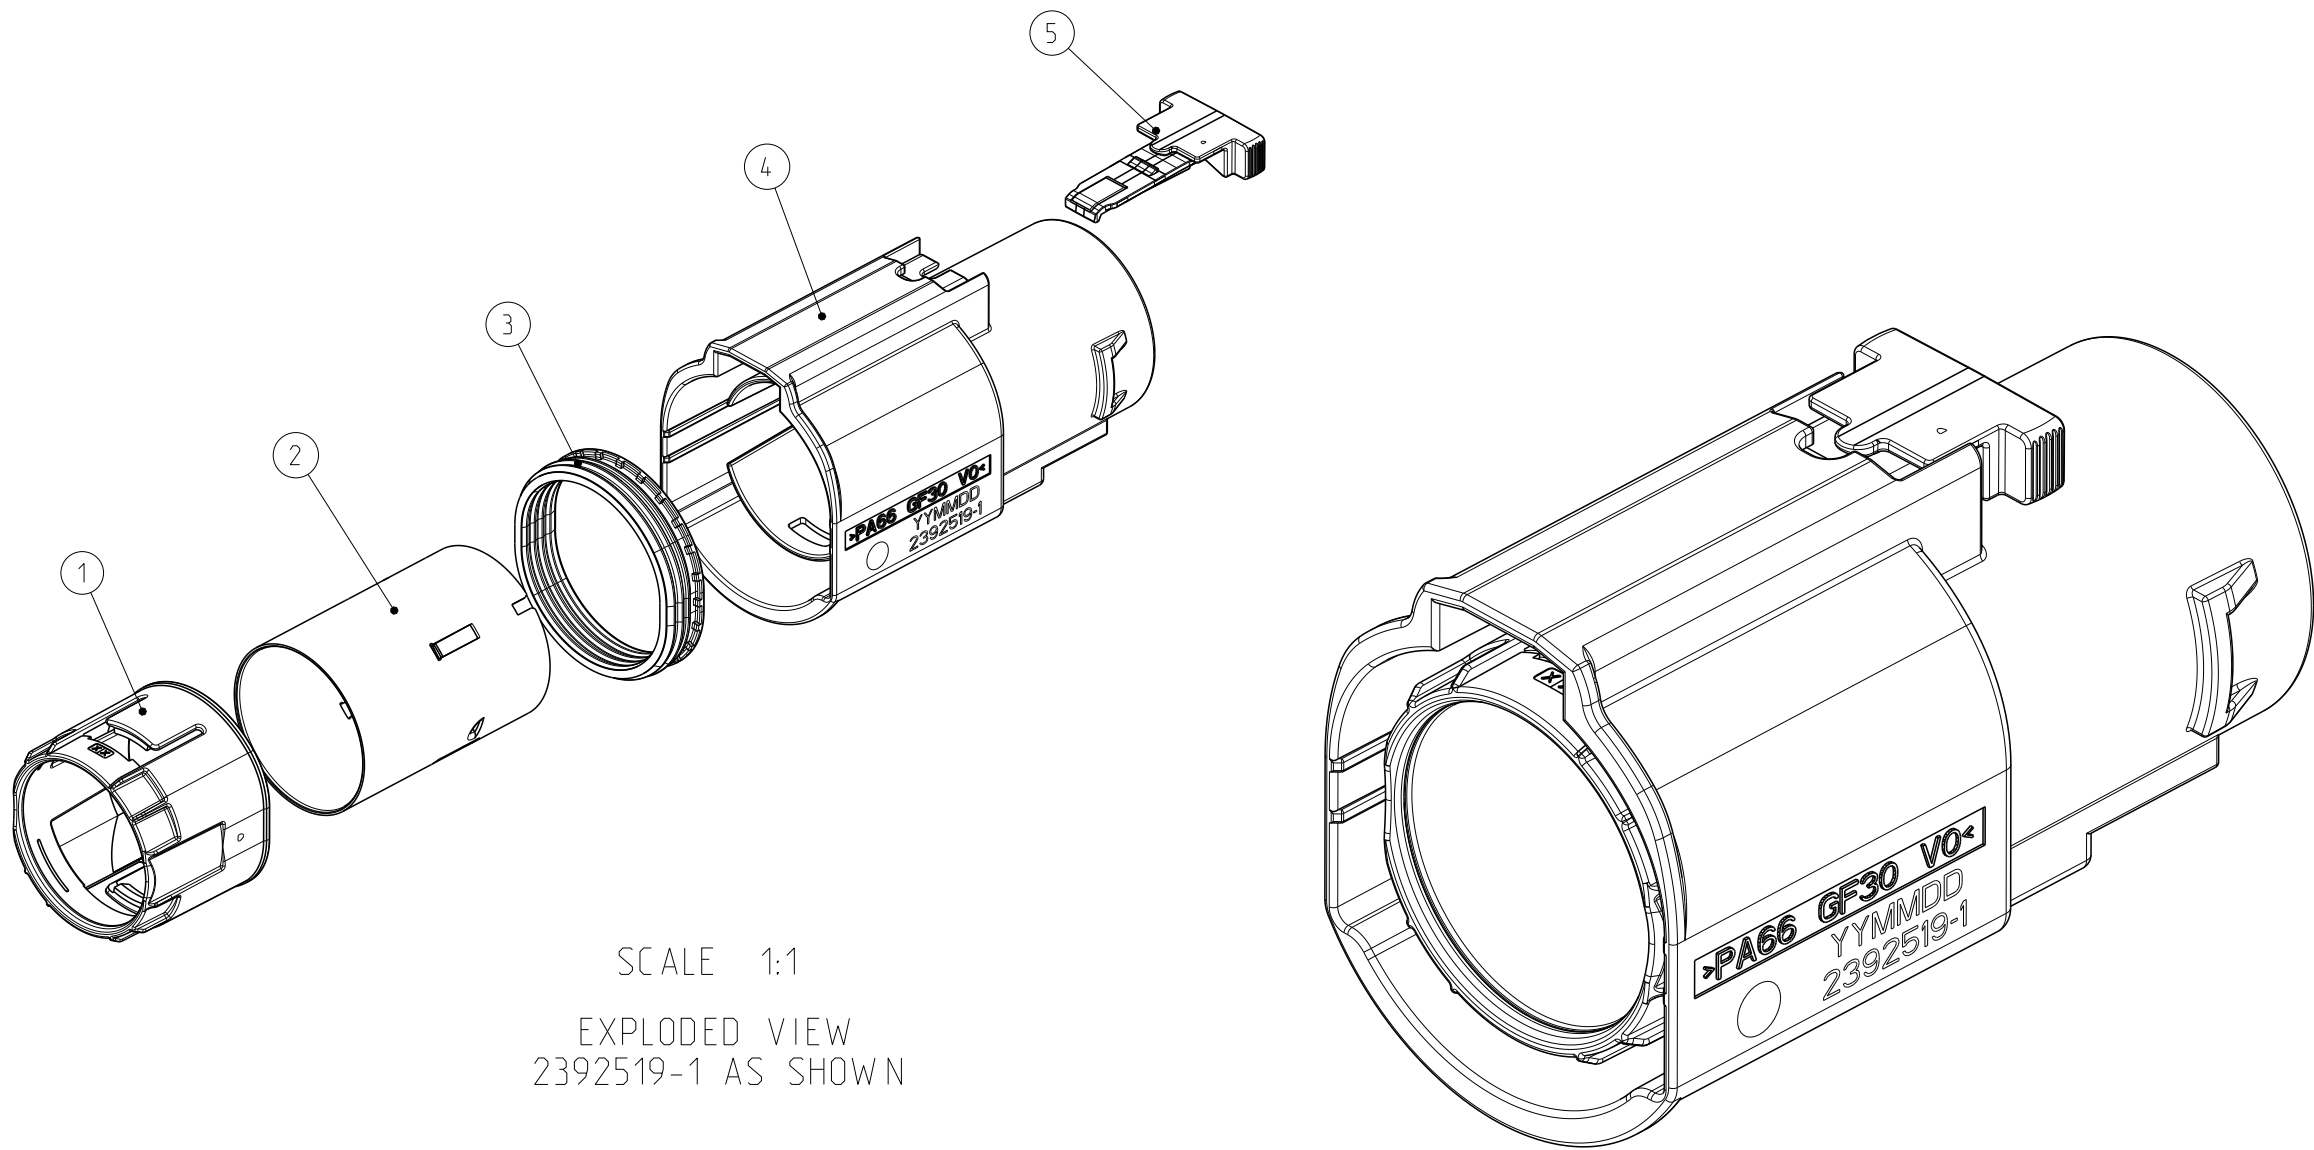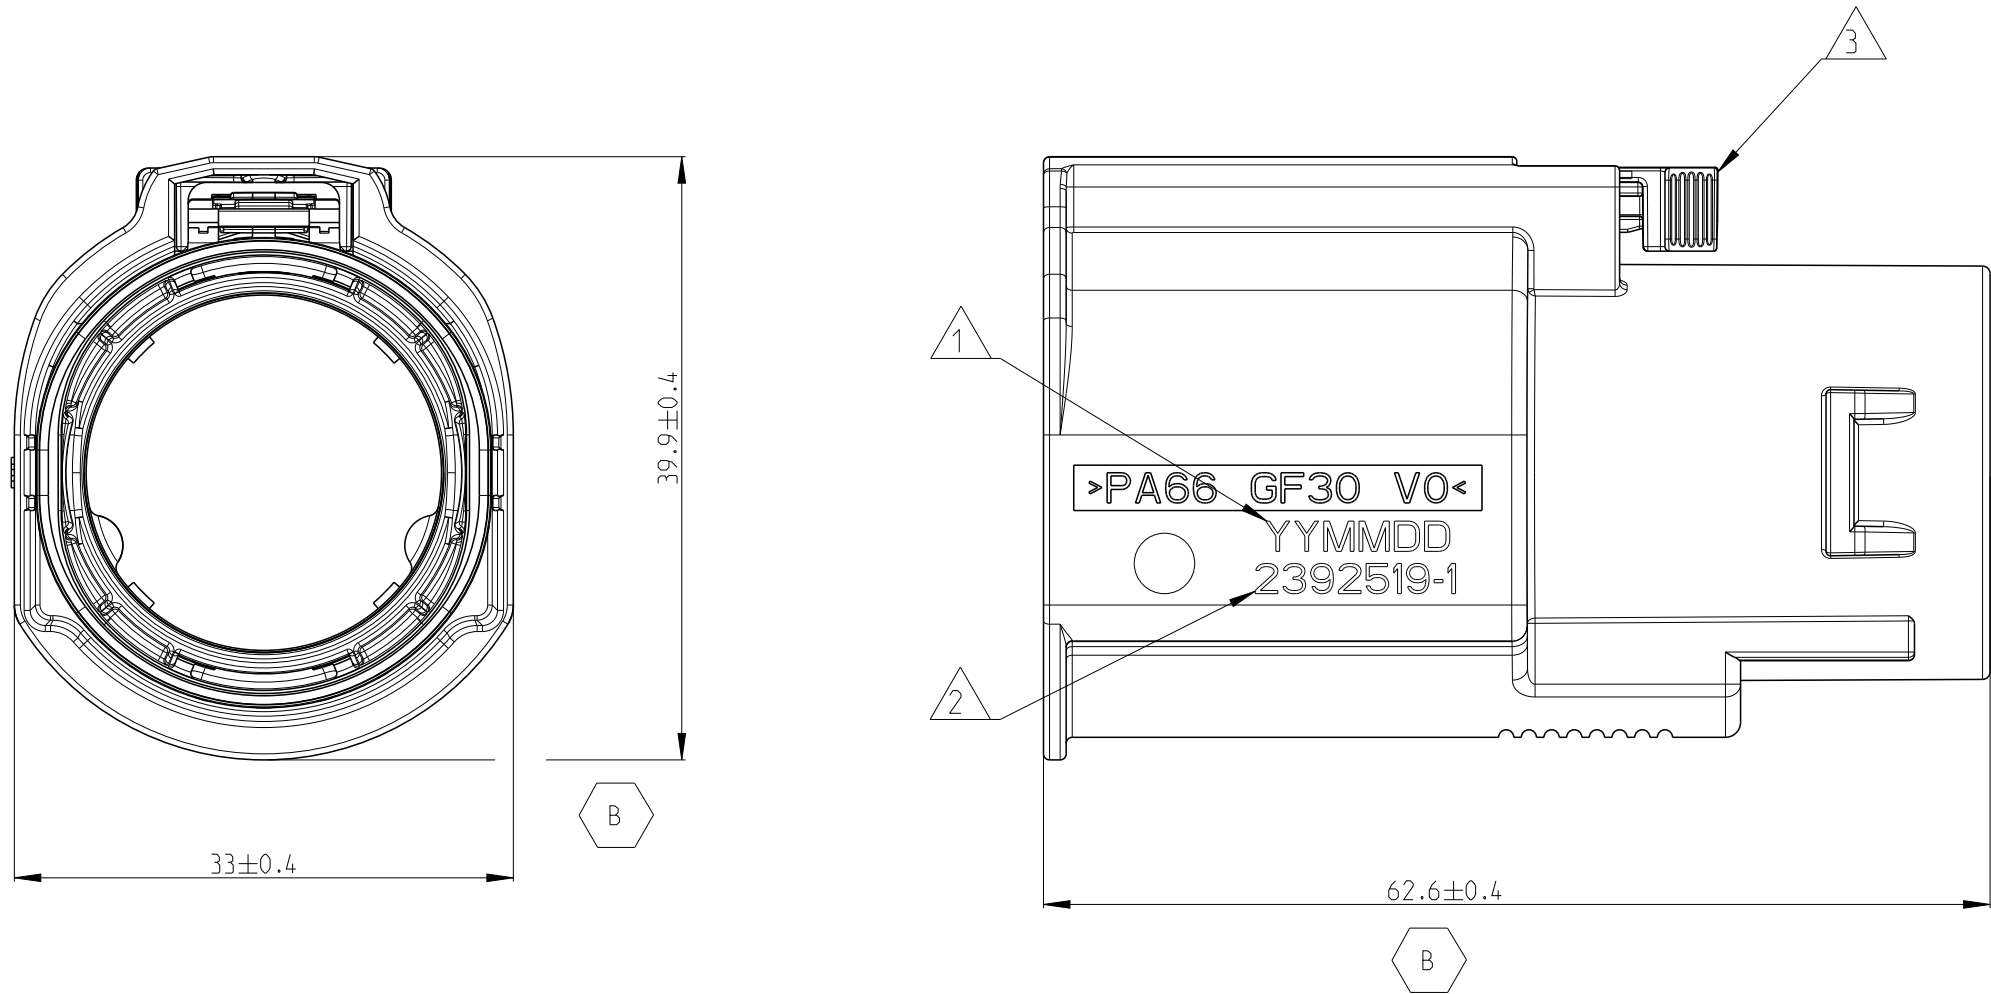

NOTE:

- 1. PRODUCTION DATE (YYMMDD)
- 2. ASSEMBLY P/N MARKING
- 3. CPA IS AT PRE-LOCK POSITION

4. COUNTERPART INFO:
1). HEADER X-2371113-X
2). OTHER SEE TABLE:

USED CABLE	2X2.5mm ²	3X2.5mm ²	2X4mm ²	3X4mm ²	2X6mm ²	3X6mm ²
QUALIFIED CABLE BRAND	RADOX® SCREENED MULTICORE CABLE OTHER WIRE SHALL CONTACT TE FOR FURTHER INFO					
SOCKET CONTACT	X-2349177-1		X-2349177-2		X-2349177-3	
FIXTURE	2392564-1					
INNER HOUSING	X-2392563-X 					
INNER FERRULE	2392553-1		2392553-2		2392553-3	2392553-4
OUTER FERRULE	2392554-1		2392554-2			2392554-3
SPACER	2392560-1		2392560-2			2392560-3
SINGLE WIRE SEAL	2392556-1		2392556-2		2392556-3	2392556-4
CABLE CLIP	2392558-1		2392558-2		2392558-3	2392558-4
RAER COVER	2392559-1		2392559-2		2392559-3	2392559-4
TPA ASSY	2392567-1					

5. GENERAL SPEC:
- 1). WORKING TEMP: -40~140°C
 - 2). WORKING VOLTAGE: 1000VDC
 - 3). DEGREE OF PROTECTION: IPXXB, IP6K9K, IP67
 - 4). FLAMMABILITY: UL94 V-0

6. CODING INFORMATION DEFINED ON INNER HOUSING DRAWING C-2392563

1	CPA	PA66-GF30 V0	RED	5	BOM OF OUTER HOUSING SUB ASSY
1	PLUG OUTER HSG	PA66-GF30 V0	ORANGE	4	
1	PERIPHERAL SEAL	VMQ	GREEN	3	
1	SHIELD	COPPER ALLOY	-	2	
1	SEAL RETAINER	PA66-GF30 V0	NATURAL	1	
Q'TY	DESCRIPTION	MATERIAL	COLOR	ITEM	
2392519-1	ASSEMBLY P/N				
A	REVISION OF ASSEMBLY				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Z.CHEN 21OCT2021	TE Connectivity			
DIMENSIONS: mm		CHK J.LI 21OCT2021				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J.LI 21OCT2021	NAME OUTER HSG SUB ASSY HVA-HD400 MULTI CORE PLUG			
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 108-160599	SIZE A2		CAGE CODE 00779	DRAWING NO C-2392519
MATERIAL -		APPLICATION SPEC 114-160337	RESTRICTED TO -			
FINISH -		WEIGHT -	SCALE 2:1		SHEET 1 OF 1	REV B
		CUSTOMER DRAWING				