


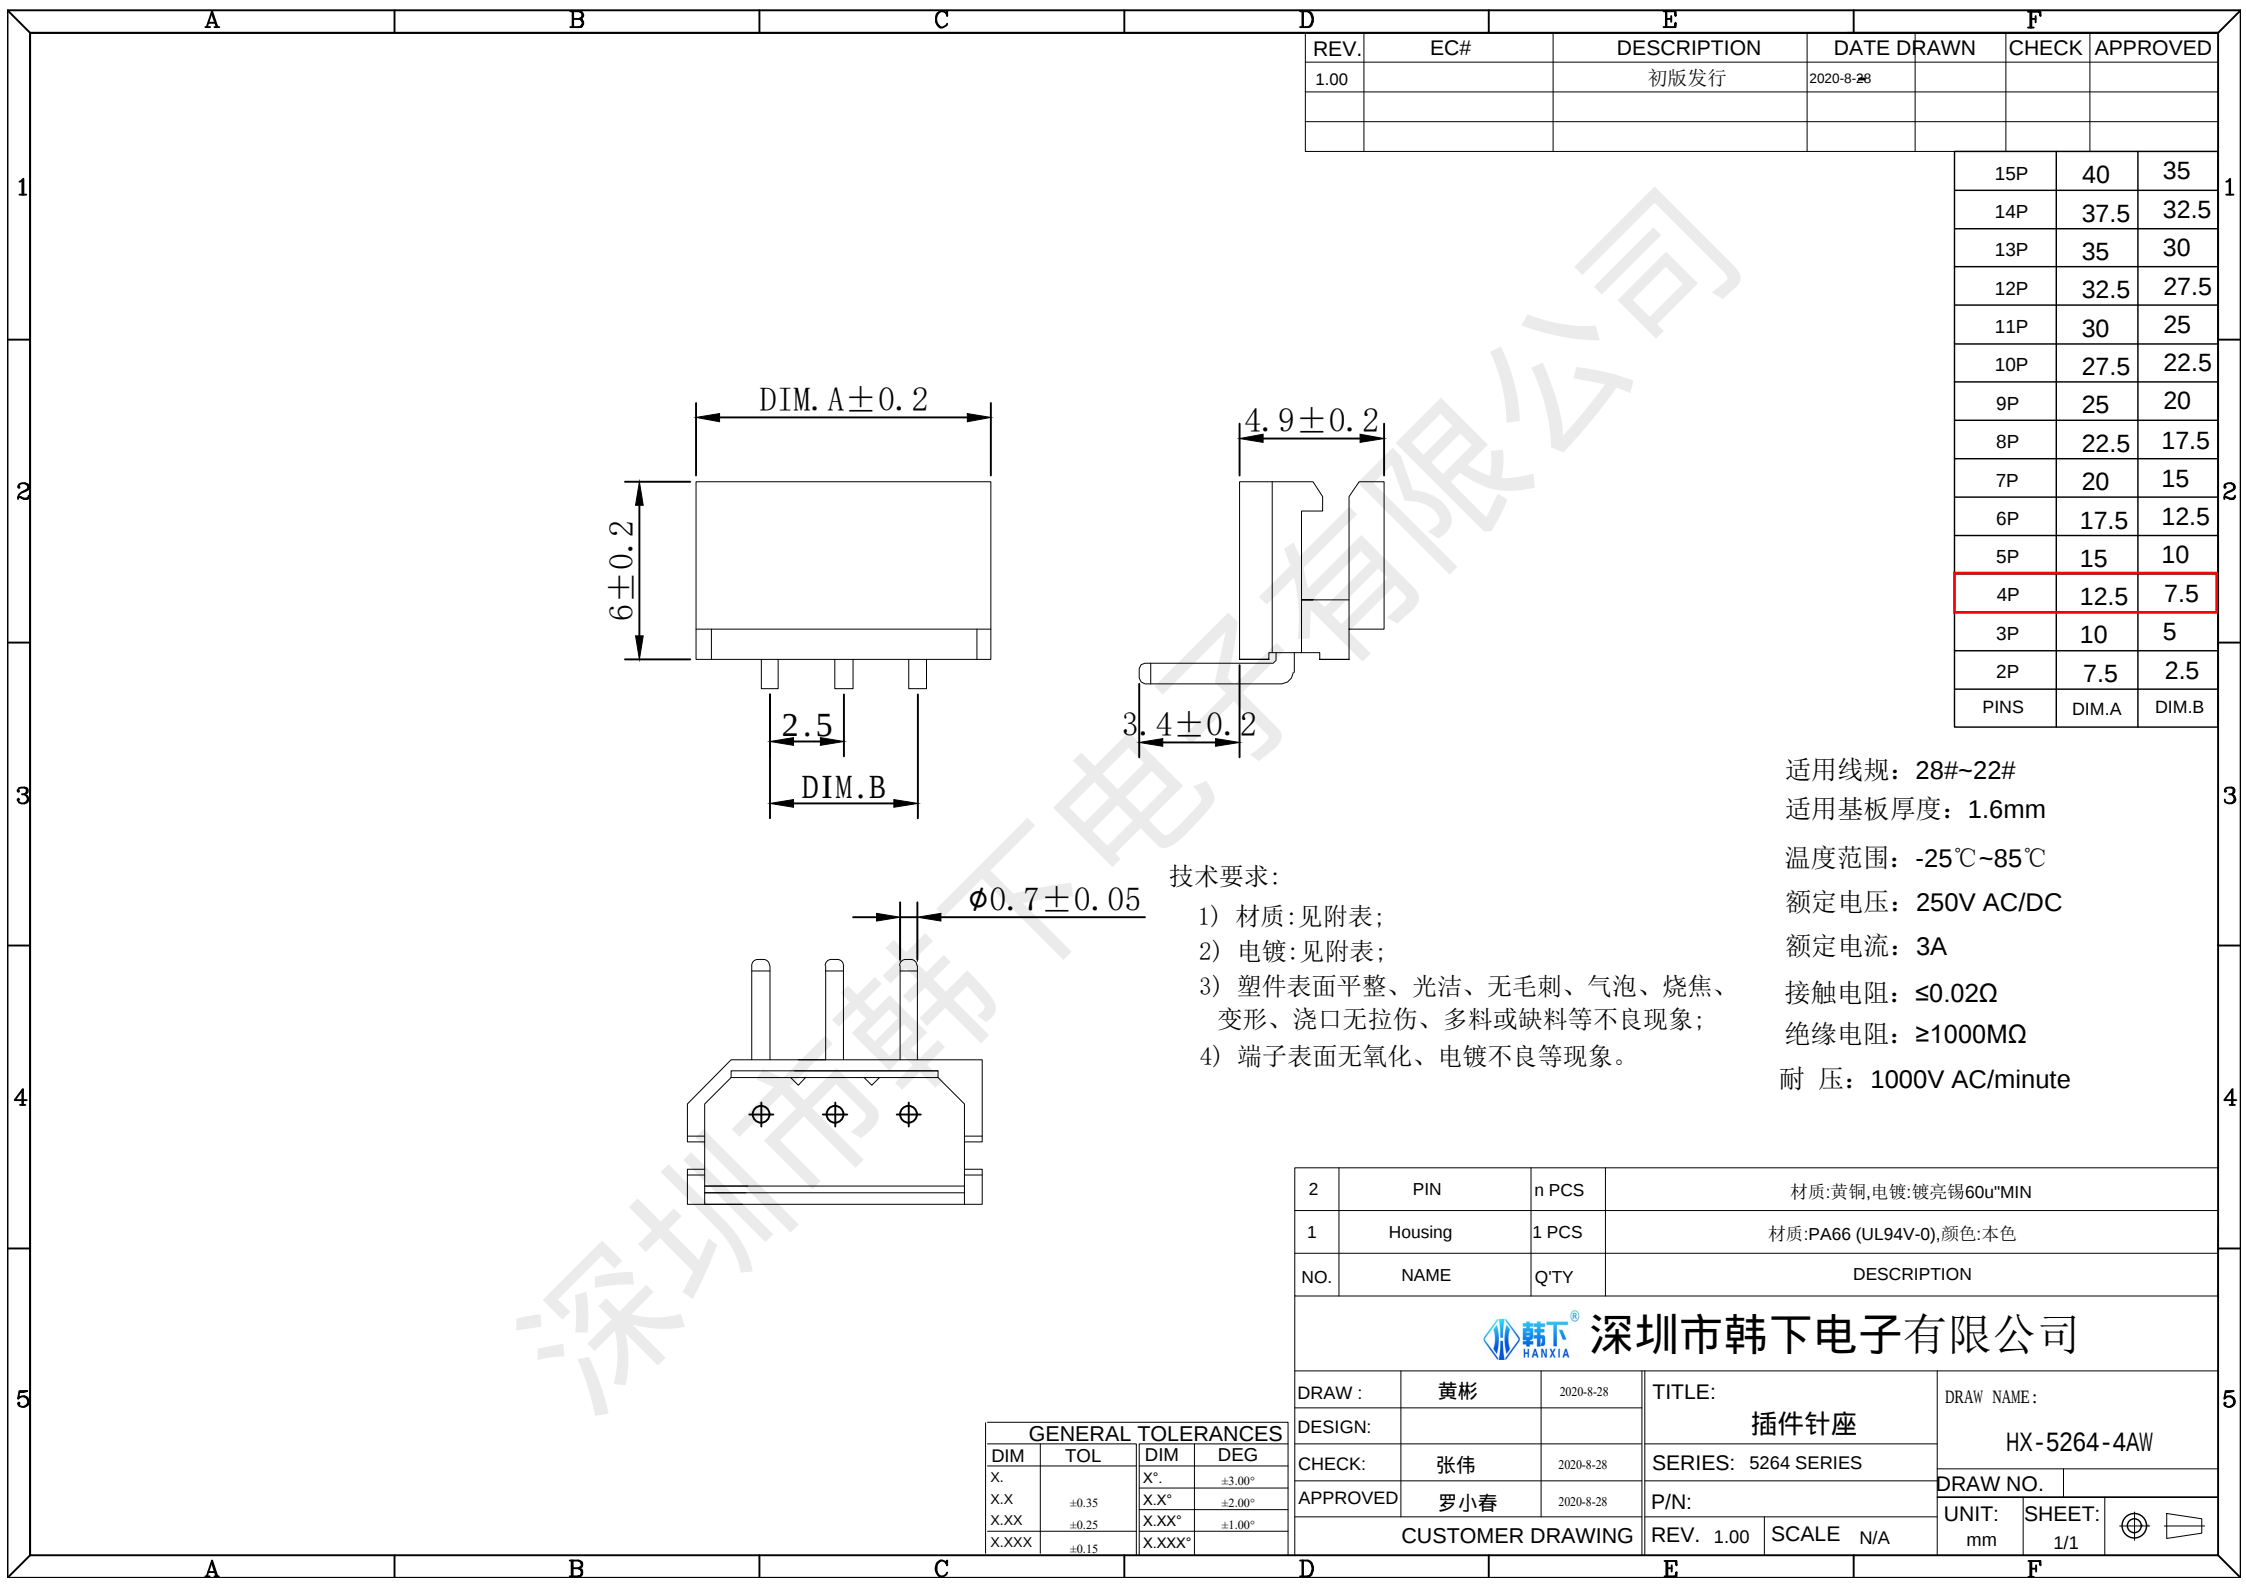

REV.	EC#	DESCRIPTION	DATE DRAWN	CHECK	APPROVED
1.00		初版发行	2020-8-28		

15P	40	35
14P	37.5	32.5
13P	35	30
12P	32.5	27.5
11P	30	25
10P	27.5	22.5
9P	25	20
8P	22.5	17.5
7P	20	15
6P	17.5	12.5
5P	15	10
4P	12.5	7.5
3P	10	5
2P	7.5	2.5
PINS	DIM.A	DIM.B

适用线规：28#~22#
适用基板厚度：1.6mm
温度范围：-25℃~85℃
额定电压：250V AC/DC
额定电流：3A
接触电阻：≤0.02Ω
绝缘电阻：≥1000MΩ
耐 压：1000V AC/minute

2	PIN	n PCS	材质:黄铜,电镀:镀亮锡60u"MIN				
1	Housing	1 PCS	材质:PA66 (UL94V-0),颜色:本色				
NO.	NAME	Q'TY	DESCRIPTION				
 深圳市韩下电子有限公司							
DRAW :	黄彬	2020-8-28	TITLE: 插件针座		DRAW NAME: HX-5264-4AW		
DESIGN:							
CHECK:	张伟	2020-8-28	SERIES: 5264 SERIES		DRAW NO.		
APPROVED	罗小春	2020-8-28	P/N:				
CUSTOMER DRAWING			REV. 1.00	SCALE N/A	UNIT: mm	SHEET: 1/1	

GENERAL TOLERANCES			
DIM	TOL	DIM	DEG
X.		X°.	±3.00°
X.X	±0.35	X.X°	±2.00°
X.XX	±0.25	X.XX°	±1.00°
X.XXX	±0.15	X.XXX°	