
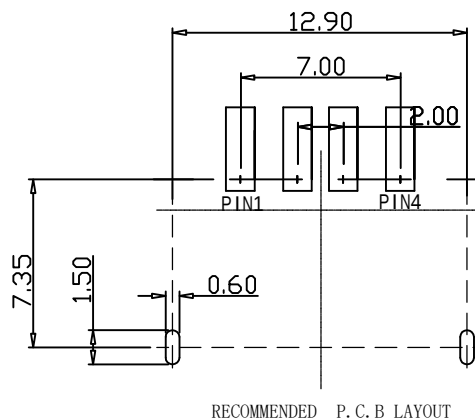
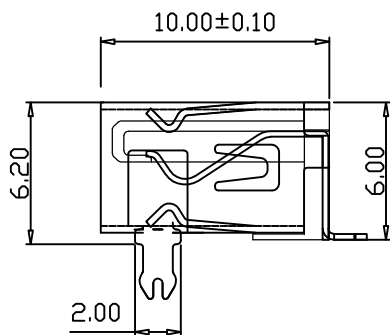

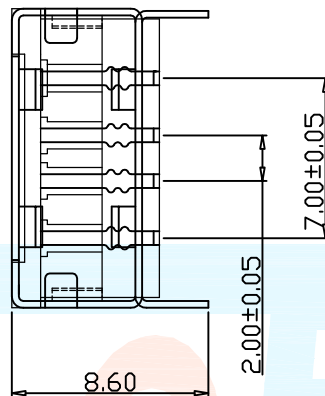


1	VCC	+5V
2	-DATA 0	Neagative Data Channel 0
3	+DATA 0	Positive Data Channel 0
4	GND	Ground

REVISION			
LTR	DESCRIPTION	DATE	APP
A0	NEW RELEASE	08/27/2021	PECK

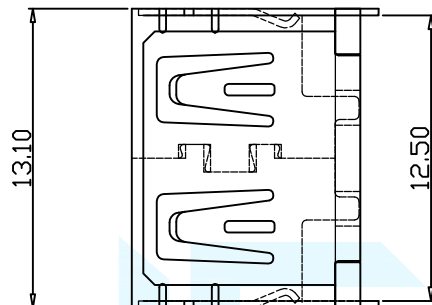

NOTES:

- MATERIAL SPECIFICATION
 - INSULATION MATERIAL THERMOPLASTIC.
 - SHELL: COPPER ALLOY/SPCC, T: 0.30mm
PLATING: NICKEL
 - TERMINAL: COPPER ALLOY, T: 0.25mm
PLATING: GOLD/TIN PLATED.
- ELECTRICAL CHARACTERISTIC:
 - INSULATION RESISTANCE: 1000MΩ MIN.
 - CONTACT RESISTANCE: 30mΩ MAX.
 - WITHSTANDING VOLTAGE: 500V AC.
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE: 3.57Kgf MAX.
 - EXTRACTION FORCE: 1.02Kgf MIN.

ORDERING INFORMATION

DIMENSION CLASSIFICATION		台灣碩方精密電子科技有限公司			SOFNG	
■ : CRITICAL ☒ : MAJOR		TAIWAN SOFNG PRECISION ELECTRONIC CO., LTD				
TOLERANCE TABLE		TITLE	USB-106SD-P262		開關, 連接器	
.X	± 0.40	PART NO.	SOF-G006		SERIES	SD106
.XX	± 0.25	APPROVED	Peck	DWG NO.	USB-106SD-P262	
.XXX	± 0.10	CHECKED	Paul	SCALE 1:1	UNIT mm	SIZE A4
ANGLE	± 2°	DRAWIN	David	REV	AO	SHEET NO. 1/1