


NOTES:

1. VOLTAGE RATING: 30V DC ;
2. CURRENT RATING: 1A ;
3. CONTACT RESISTANCE: $\leq 30m\Omega$;
4. INSULATION RESISTANCE: $\geq 100M\Omega$;
5. WITHSTAND VOLTAGE: 500 VAC ;
6. UNMATING FORCE: 3N~30N ;
7. OPERATING LIFE: 5000 CYCLES MIN ;
8. OPERATION TEMPERATURE: $-20^{\circ}C \sim +80^{\circ}C$;

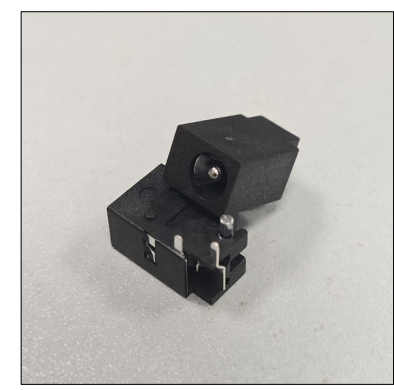

Ordering Information

HC- DC*** - * - * ** - * - ** - ** - 08

序列号	Nature	Foot	Type	T=Through holes	PIN Diameter	Material
	M=Male F=Female	2=2P 3=3P 4=4P	DP=DP (插孔) SM=SMT (贴片) V=Vertical DP (垂直)		1.2~1.3mm 1.65~1.65mm 2.0~2.0mm 2.0~2.5mm	HT=HT M=M

4	主体	PA9T	1	黑色
3	静片	黄铜 T=0.3mm	1	镀铜锡
2	弹片	磷铜 T=0.3mm	1	镀铜锡
1	PIN针	黄铜	1	镀铜锡
序号	名称	材料	数量	颜色/电镀

		GENERAL TOLERANCE	制图
		DIM TOL	DRAWING
		X.X ± 0.30	审核
		X.XX ± 0.20	CHECK
		X.XXX ± 0.10	批准
1	初版发行	Angle $\pm 3.0^{\circ}$	APPROVAL
序号	变更内容		比例
No.	MODIFY CONTENT		SCALE
	日期		投影
	MODIFY DATE		Projection

深圳市华灿天禄电子有限公司
ShenzhenhuacantianluELECTRONICS CO., LTD

产品名称 TITLE	电源插座 母座 3P 卧插 通孔 $\phi 1.6$ 全铜	版本 REV.	A
产品料号 PART NO.	HC-DC023-F-3DIP-T-1.6-HT-08	单位 UNITS	mm
材料 MATERIAL		页次 SHEET	1/1