



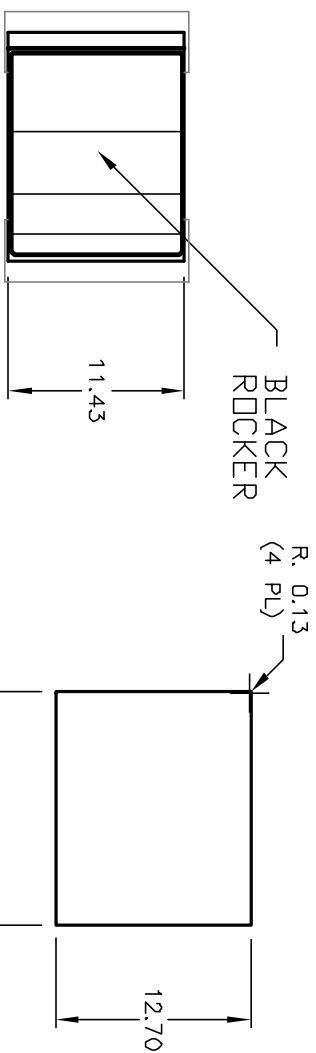


RECOMMENDED PANEL MOUNTING

PANEL THICKNESS


1.52 TD 3.18

▲ * DIMENSION IS 15.75/15.88
FOR PANEL THICKNESS BETWEEN
1.52mm TO 3.18mm

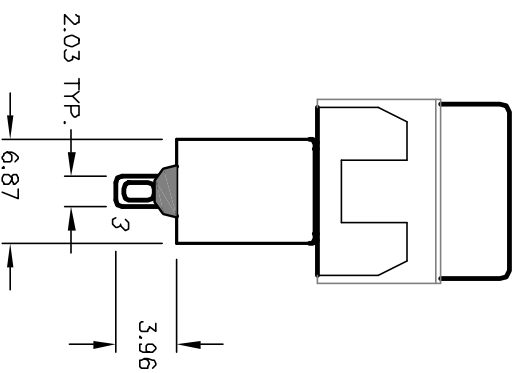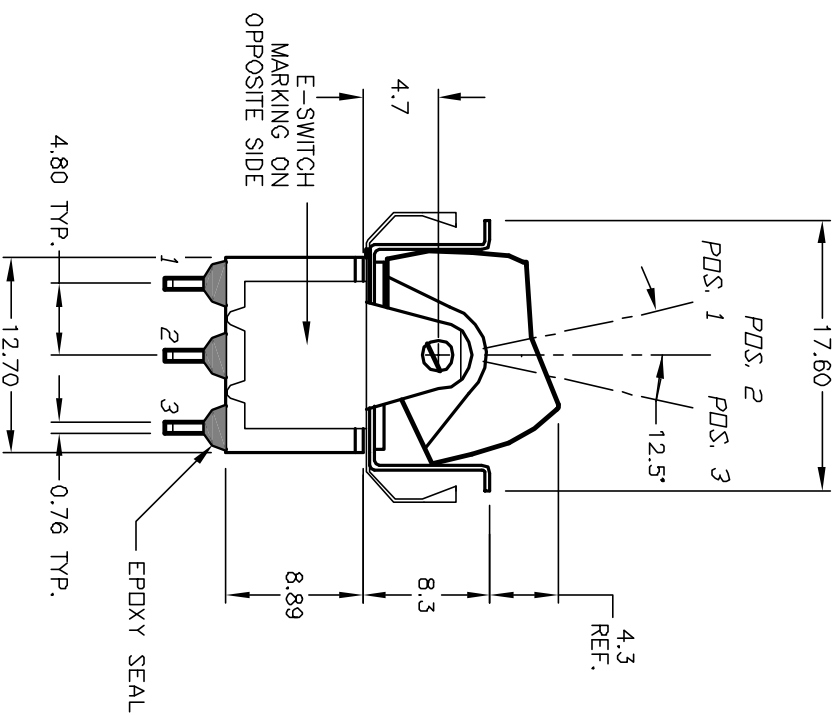

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
		
DN	ND/NE	DN
2-3	DPEN	2-1

CIRCUIT: SPDT



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC
2A @250VAC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/Silver plate
6. CONTACT RESISTANCE: 10mILL Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

E-SWITCH®				
TITLE				
300 SP-1 R9 BLK M1 Q E				
SCALE	DATE	DR	DWG	REV
2:1	--	--	T311005	A