


Qty	Dept
1	DC
1	IE
1	ISO
1	PD
1	R&D
1	SD
1	QA
1	QC
1	QE

	REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
	A	NEW RELEASE	WPY 12/09/24'		

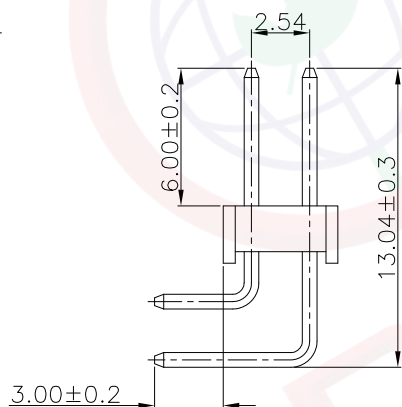

- 1.1 接触阻抗: 20毫欧最大。
- 1.2 耐压: 600伏交流电一分钟。
- 1.3 绝缘阻抗: 1000兆欧最小。
- 1.4 额定电流: 3安。
2. 环境特性:
 - 2.1 工作温度: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$ 。
3. 材料:
 - 4.1 端子: H62黄铜, 镍底镀金。
 - 4.2 胶芯: PBT, 黑色, 阻燃。

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE		2.54mm Pin Header	
X.	±0.60	X.	±5°	UNITS	mm			R/A Double Row Type	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1022 SERIES		
.XX	±0.25	.XX	±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD					
DRAWING TYPE		CUSTOMER							
SCALE	1:1	SHEET	1 OF 1						
DRAWING NO.	C-DS1022-XXXXXX-A								

 晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD