


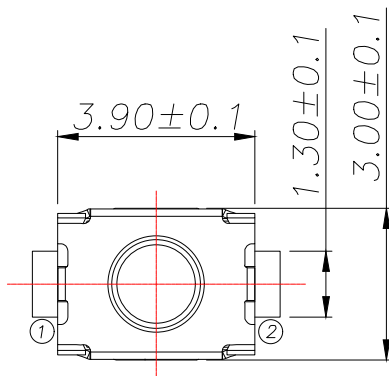



REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

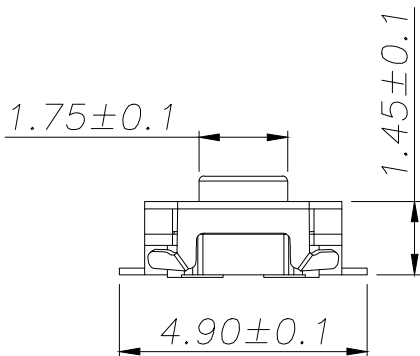


P/N	高度H	按力
TS-342P1-S26	1.80	260
TS-342P2-S26	2.00	260
TS-342P3-S26	2.50	260
TS-342P1-S16	1.80	160
TS-342P2-S16	2.00	160
TS-342P3-S16	2.50	160

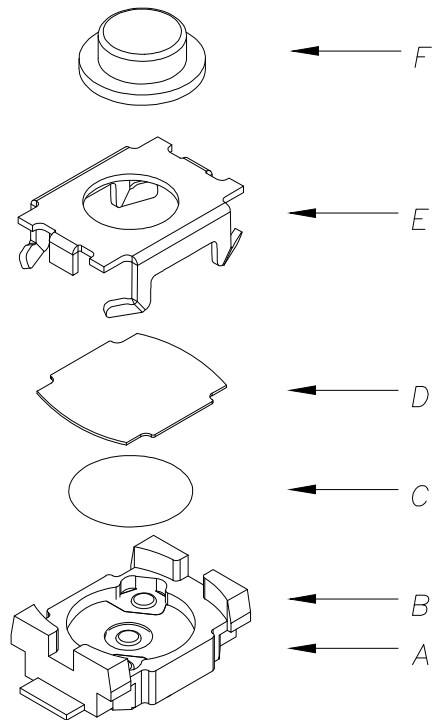


主要技术参数、性能
The Main Thchnology Performance

额定电流、电压 Rate voltage,current	50mA DC12V
接触电阻 Contact resistance	≤100mΩ
按力 Operating force	260±50gf
行程 travel	0.2±0.1mm
绝缘电阻 Insulated resistance	≥100MΩ
介电强度 Dielectric strength	≥250VAC/1min



CIRCUIT DIAGRAM

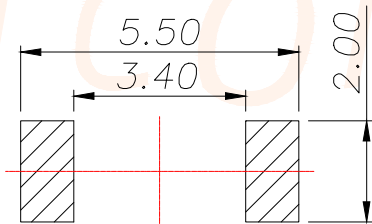

PCB.WELDING DRAWING

F	按钮	LCP	1	黑色
E	盖板	不锈钢	1	清洗
D	防尘胶	聚酰亚胺	1	橙黄色
C	弹片	不锈钢	1	镀银
B	本体	LCP	1	黑色
A	卡件	磷铜	1	镀银
项目 ITEM	名称 DESCRIPTION	材质 MATERIAL	数量 QTY	表面处理/颜色 FINISH/COLOR

TOLERANCE		 深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd				
X.X:±0.35	X.X':±3"	PART NO.		TITLE:		
X.XX:±0.25	X.XX':±2"	TS-342PX-S16		TACT SWITCH		
X.XXX:±0.15		DESIGN: Ethan		MANUFACTURE DWG		
UNITS	mm	CHED: Olvia			SCALE	SHEET
MATERILA	— — —	APPD: Ava			N:A	1/1