

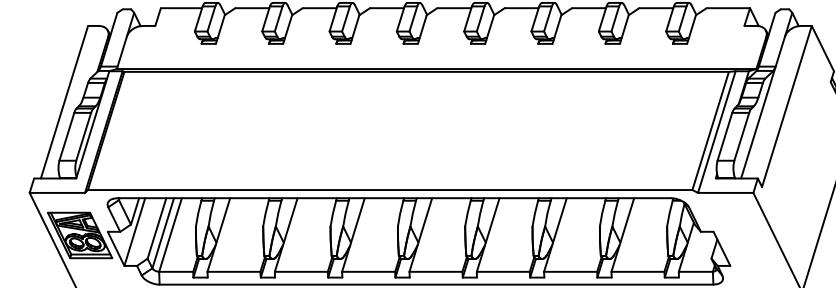
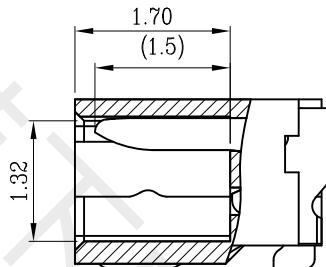
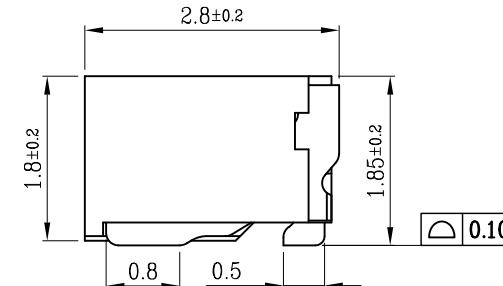
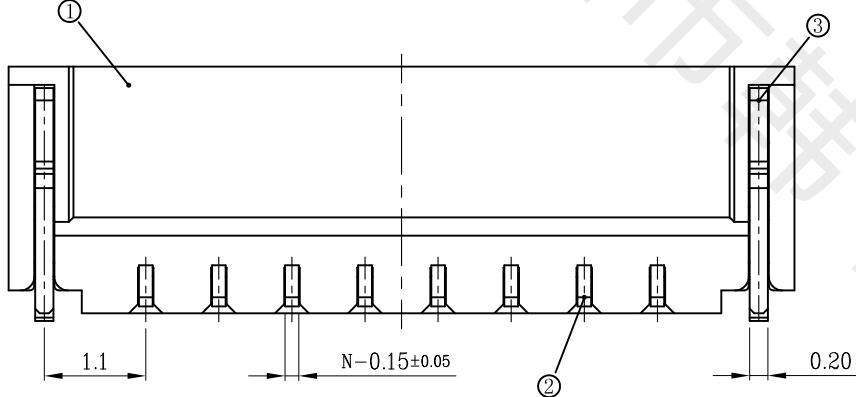


| 版次 | 变更摘要 | 日期 | 序号 | 品名 | 材质 |
|----|-------|------------|----|--------------|-----------------|
| 0 | 新产品发行 | 2020.12.08 | ① | 0.8- 卧式WTB胶芯 | LCP UL94V-0 自然色 |

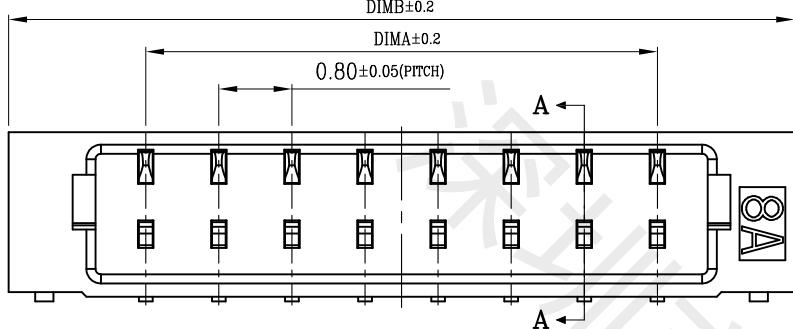

技术指标:

1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
2. 温度范围: -25° C ~ 85° C.
3. 额定电压: 30V, AC/DC.
4. 耐电压: 200V, AC/minute.
5. 接触电阻: ≤ 0.02Ω.
6. 绝缘电阻: ≥ 100MΩ.
7. 额定电流: 0.5A AC/DC.

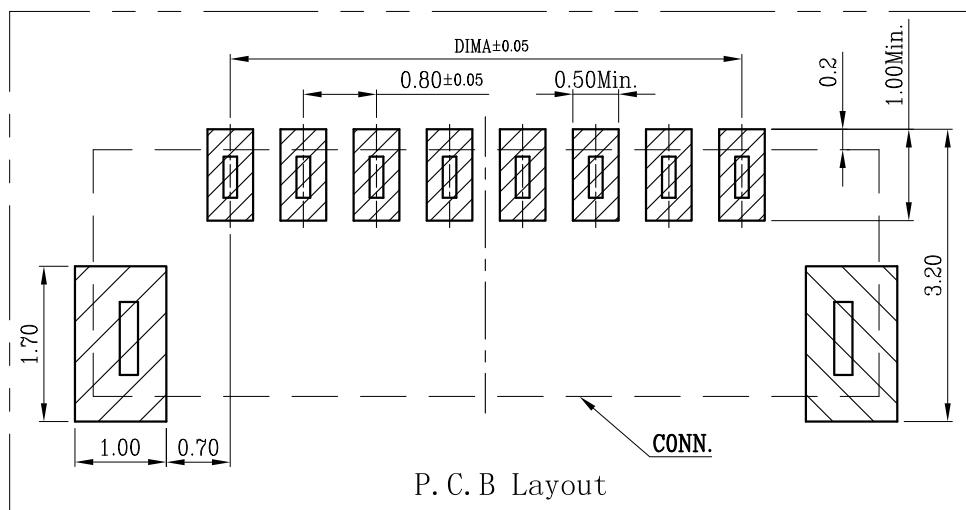

| CKT | DIM A | DIM B | CKT | DIM A | DIM B |
|-----|-------|-------|-----|-------|-------|
| 2 | 0.80 | 3.80 | 16 | 12.00 | 15.00 |
| 3 | 1.60 | 4.60 | 17 | 12.80 | 15.80 |
| 4 | 2.40 | 5.40 | 18 | 13.60 | 16.60 |
| 5 | 3.20 | 6.20 | 19 | 14.40 | 17.40 |
| 6 | 4.00 | 7.00 | 20 | 15.20 | 18.20 |
| 7 | 4.80 | 7.80 | 21 | 16.00 | 19.00 |
| 8 | 5.60 | 8.60 | 22 | 16.80 | 19.80 |
| 9 | 6.40 | 9.40 | 23 | 17.60 | 20.60 |
| 10 | 7.20 | 10.20 | 24 | 18.40 | 21.40 |
| 11 | 8.00 | 11.00 | 25 | 19.20 | 22.20 |
| 12 | 8.80 | 11.80 | 26 | 20.00 | 23.00 |
| 13 | 9.60 | 12.60 | 27 | 20.80 | 23.80 |
| 14 | 10.40 | 13.40 | 28 | 21.60 | 24.60 |
| 15 | 11.20 | 14.20 | | | |

| | | | |
|-------------|-------------|------------|----|
| 韩下 HANXIA | 深圳市韩下电子有限公司 | | |
| 品名 (TITLE) | 贴片针座 | | |
| 料号 (DWG.NO) | HX-0.8-4PWT | | |
| 比例 (SCALE) | 1:1 | 单位 (UNITS) | mm |
| 张数 (SHEET) | 1 OF 1 | SIZE | A4 |
| REV | A | | |

一般公差 (TOLERANCE)
 $X \pm .50$ $XX \pm .10$
 $X \pm .20$ $XXX \pm .05$
 ANGLES $\pm 1^\circ$