


MCX-JWE型射频同轴连接器技术规范

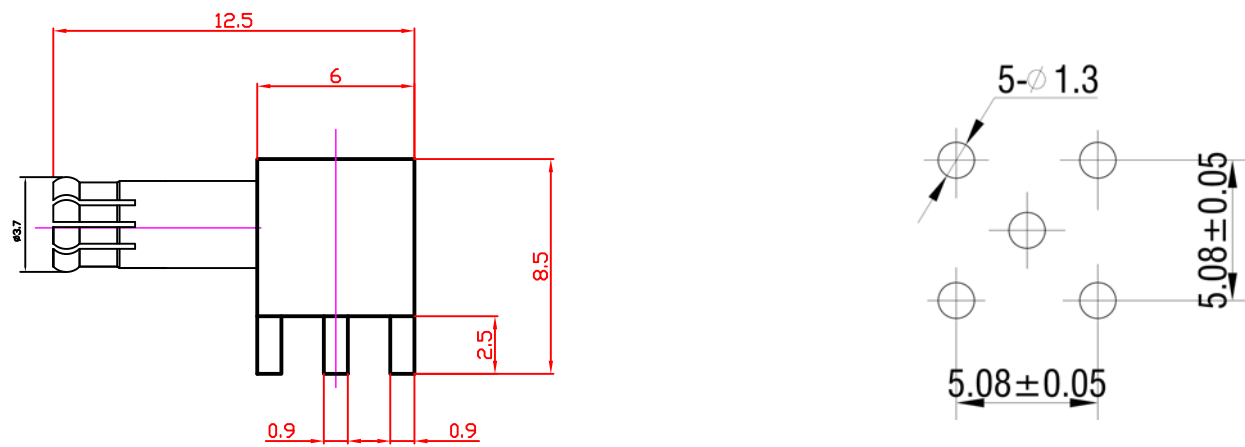

界面 Interface	
According to	IEC 61169-36

电气特性Electrical	
特性阻抗Characteristic Impedance	50 ohm
频率范围Frequency Range	DC-3GHz
电压驻波比VSWR	≤ 1.50
抗电强度Dielectric Withstanding Voltage	≥ 250V RMS, at sea level
绝缘电阻Dielectric Resistance	≥ 1000MΩ
接触电阻Contact Resistance	中心导体间Center Contact ≤ 5mΩ 外导体间Outer Contact ≤ 2.5mΩ

机械特性Mechanical	
机械耐久性Durability	≥ 500次
内导体间拔出力Center conductor withdrawal force	≥ 0.27N

材料及涂镀 Material and plating		
name	Material	plating
外壳Body	黄铜Brass	金Au
绝缘子Insulator	聚四氟乙烯PTFE	-
内导体Center conductor	铍青铜beryllium bronze	金Au

环境特性Environmental	
温度范围Temperature Range	-40℃ ~ +85℃