



SPECIFICATIONS

Current Rating:3.0AMP

Contact Resistance:10mΩ Max

Dielectric Strength:Min 1000V RMS

Mating Pin:ø0.4 to ø0.56mm

Forces:(polished steel gauge ø0.43mm)

Operation Temperature:-40°C to +105°C

Sleeve:Brass




Contact Plating:Au Over Ni

Contact Clip(4 finger):Phosphor Bronze/BeCu

Insulator Material:Polyester(UL94V-0)

Standard: PPS

Soldering Temperature: 260°C±5° 5S

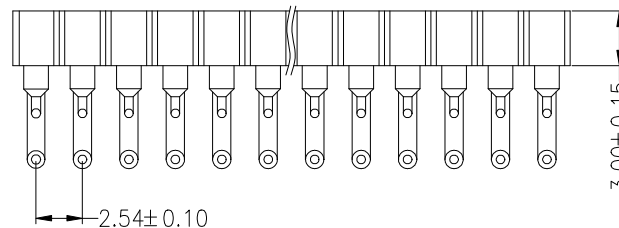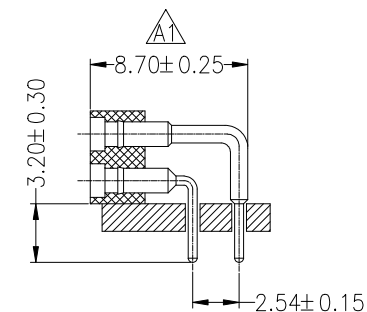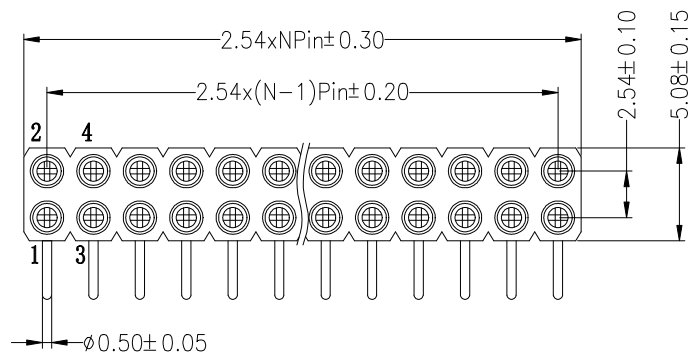


Ordering Information

3620 30 2 XX R XX 098 XX

No.of Pins
Per Row
2-40

Contact Plating
G0:Gold Flash
S0:Gold Flash/Tin

流水码

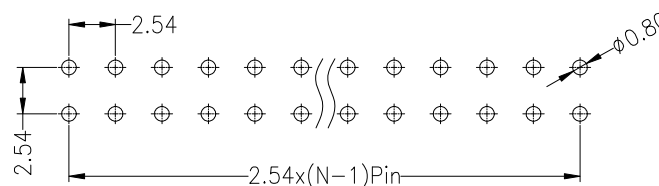

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

OPERATION		DRAW	Yiyusheng	18.10.23	SCALE	FIT	JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483523 Fax: 86-755-2997-5588	
					UNIT	mm		
A1	2018.10.23	Change size			SIZE	A4	PART NO.	3620302XXRXX098XX
A0	2014.04.01	NEW DRAWING			SHEET	1/1	TITLE:	2.54X3.0 Machine Socket 90° L=9.85/14.85mm
REV	DATE	MODIFICATION DESCRIPTION	CHANGE		PROJ.			

1

2

3

4

5

6

7

8

9