


Features

- Maximum Output Current of 100mA
- Output Voltage of 3.3V
- Thermal Overload Protection
- Short Circuit Current Limiting
- Output Voltage Offered in $\pm 5\%$ Tolerance


Description

The L78L33ABUTR-CN of fixed voltage monolithic integrated circuit voltage regulators are suitable for application that required supply current up to 100mA.

Internal Block Diagram

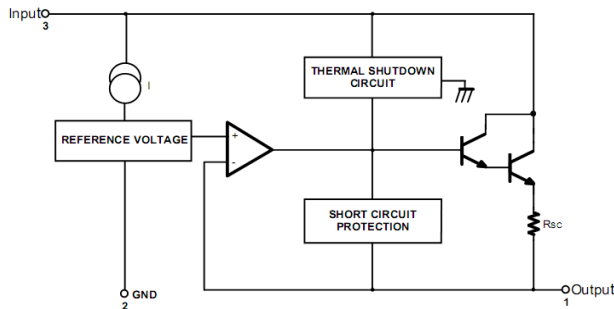

SOT-89



Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Input Voltage	V_{IN}	30	V
Operating Temperature Range	T_{OPR}	0 ~ +125	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

Electrical Characteristics

($V_I = 8.3V$, $I_O = 40mA$, $0^\circ C \leq T_J \leq 125^\circ C$, $C_I = 0.33\mu F$, $C_O = 0.1\mu F$, unless otherwise specified. (Note))

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Output Voltage	V_O	$T_J = 25^\circ C$	3.168	3.3	3.432	V
		$V_I = 5.3 \sim 20V$ $I_O = 1 \sim 100mA$	3.135	3.3	3.465	
Line Regulation(Note)	ΔV_O	$V_I = 5.3 \sim 20V$, $T_J = 25^\circ C$			150	mV
		$V_I = 6.3 \sim 20V$, $T_J = 25^\circ C$			100	
Load Regulation(Note)	ΔV_O	$I_O = 1 \sim 100mA$, $T_J = 25^\circ C$			60	mV
		$I_O = 1 \sim 40mA$, $T_J = 25^\circ C$			30	
Quiescent Current	I_Q	$T_J = 25^\circ C$			6	mA
Quiescent Current Change	ΔI_Q	$I_O = 1 \sim 40mA$			0.1	mA
		$I_O = 40mA$, $V_I = 6.3 \sim 20V$			1.5	
Output Voltage Drift	$\Delta V / \Delta T$	$I_O = 5mA$, $T_J = 0$ to $+125$		0.45		mV/°C
Output Noise Voltage	V_N	$10Hz \leq f \leq 100KHz$		40		μV
Ripple Rejection	RR	$f = 120Hz$, $V_I = 6.3 - 1V$, $T_J = 25^\circ C$	40			dB
Dropout Voltage	V_d			1.7		V

Notes: The maximum steady state usable output current and input voltage are very dependent on the heat sinking and/or lead length of the package. The data above represent pulse test conditions with junction temperature as indicated at the initiation of tests.

Typical Characteristics

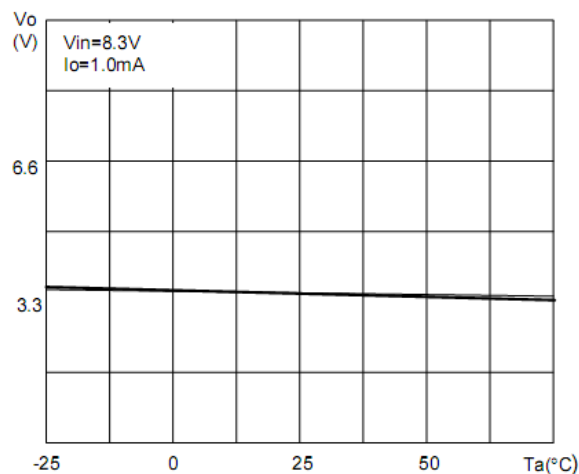


Fig1 .Output Voltage vs AmbientTemperature

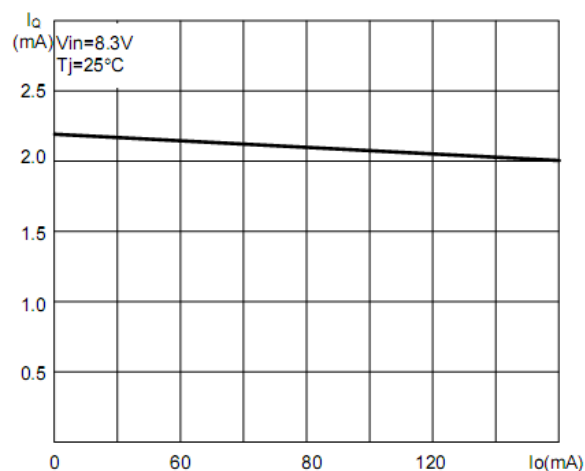


Figure 2. Quiescent Current vs Output Current

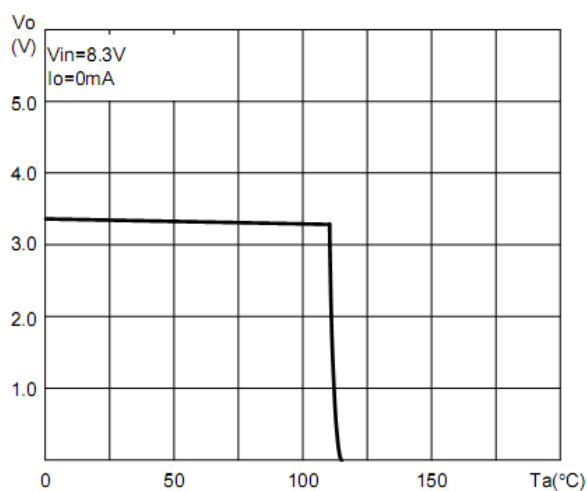


Figure 3 : Load Characteristics

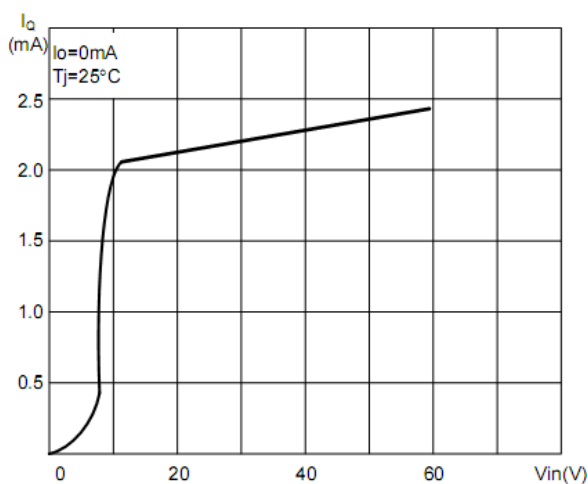


Figure 4 : Quiescent Current vs Input Voltage

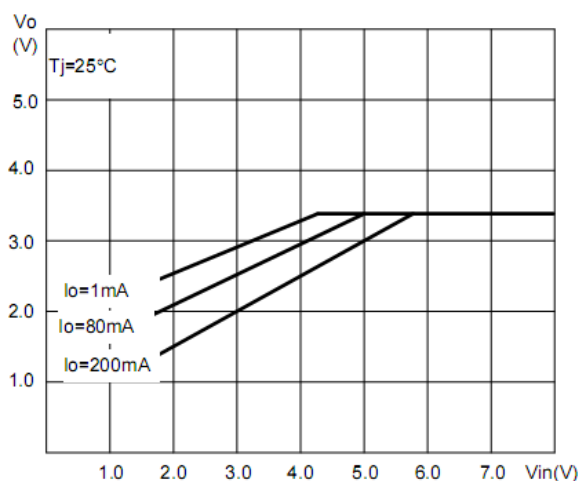


Figure5 : Thermal Shutdown


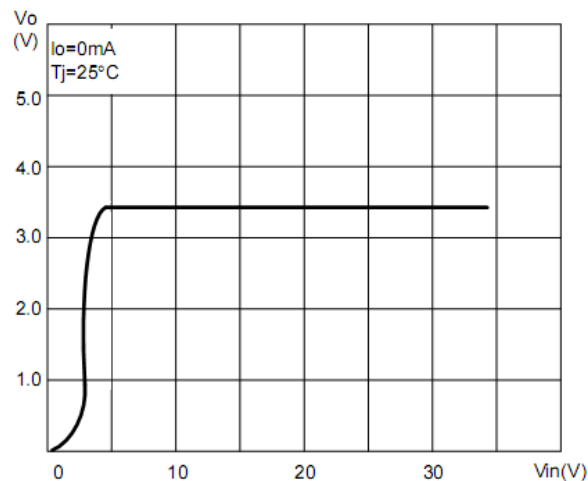


Figure 6 : Output Characteristics

Package Dimensions

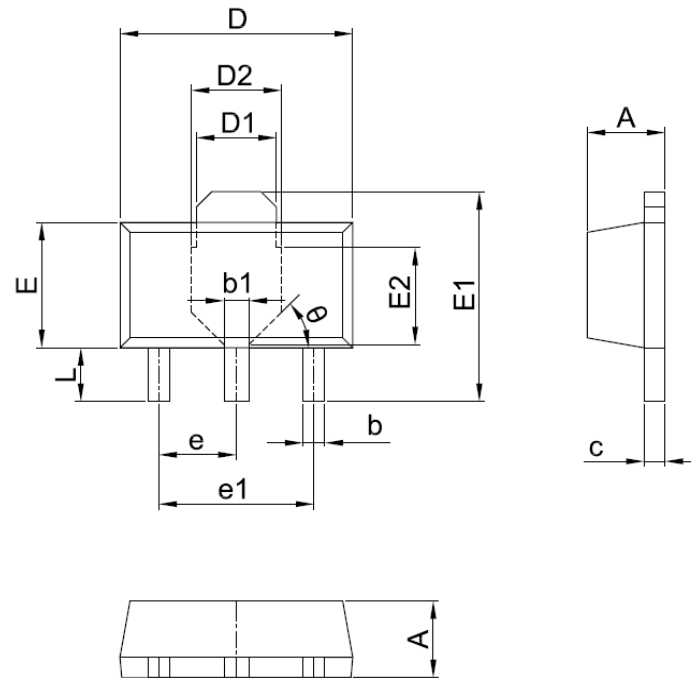

Symbol	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.40	1.60	0.055	0.063
b	0.32	0.52	0.013	0.020
b1	0.38	0.58	0.015	0.023
c	0.35	0.45	0.014	0.018
D	4.40	4.60	0.173	0.181
D1	1.45	1.65	0.057	0.065
D2	1.70	1.80	0.067	0.071
E	2.30	2.60	0.091	0.102
E1	3.95	4.25	0.156	0.167
E2	1.80	2.00	0.071	0.079
e	1.40	1.60	0.055	0.063
e1	2.80	3.20	0.110	0.126
L	0.90	1.20	0.035	0.047

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。