


NOTES:

1. VOLTAGE RATING: 12V DC ;
2. CURRENT RATING: 10A ;
3. CONTACT RESISTANCE: $\leq 30m\Omega$;
4. INSULATION RESISTANCE: $\geq 100M\Omega$;
5. WITHSTAND VOLTAGE: 500 VAC ;
6. UNMATING FORCE: 3N~30N ;
7. OPERATING LIFE: 5000 CYCLES MIN ;
8. OPERATION TEMPERATURE: $-20^{\circ}C \sim +80^{\circ}C$;

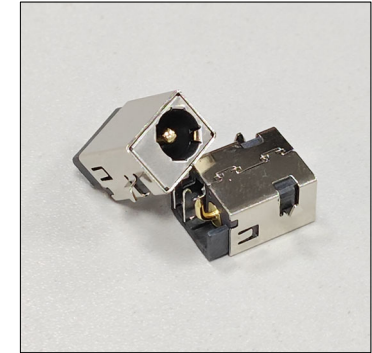

Ordering Information

HC- DC*** - * - * ** - * - ** - ** - 08

序列号 Nature Foot Type T=Through holes PIN Diameter Material
M=Male F=Female 2=2P 3=3P 4=4P DP=DP (有插孔) SM=SM (有插孔) VS=Vertical SM (有插孔) MB=Mid Mount (有插孔) DS=DP+SM (有插孔) WB=Wire Bonding (有插孔)
1.3±0.3mm 1.65±0.15mm 2.0±0.2mm 2.5±0.2mm HT=1.0mm MT=1.0mm

7	面板	不锈钢	1	本色
6	外壳	黄铜	1	镀镍
5	PIN针	黄铜	1	镀金
4	固定片	LCP UL94V-0	1	黑色
3	静片	黄铜	1	镀银
2	弹片	磷铜	1	镀银
1	主体	LCP UL94V-0	1	黑色
序号	名称	材料	数量	颜色/电镀

PIN	Ø2.0	Ø2.5
APPO		

			GENERAL TOLERANCE	制图	深圳市华灿天禄电子有限公司			
				DRAWING	ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审核	产品名称	电源插座 母座 5P 沉板	版本	A
			X.X ±0.30	CHECK	TITLE	02.0/02.5 半铜	REV.	
			X.XX ±0.20	批准	产品料号	HC-DC0125-F-5MM-XX-M-08	单位	mm
			X.XXX ±0.10	APPROVAL	PART NO.		页次	1/1
			Angle ±3.0°	比例	材料		SHEET	
				SCALE				
				投影				
				Projection				
1	初版发行							
序号	变更内容	日期						
No.	MODIFY CONTENT	MODIFY DATE						