


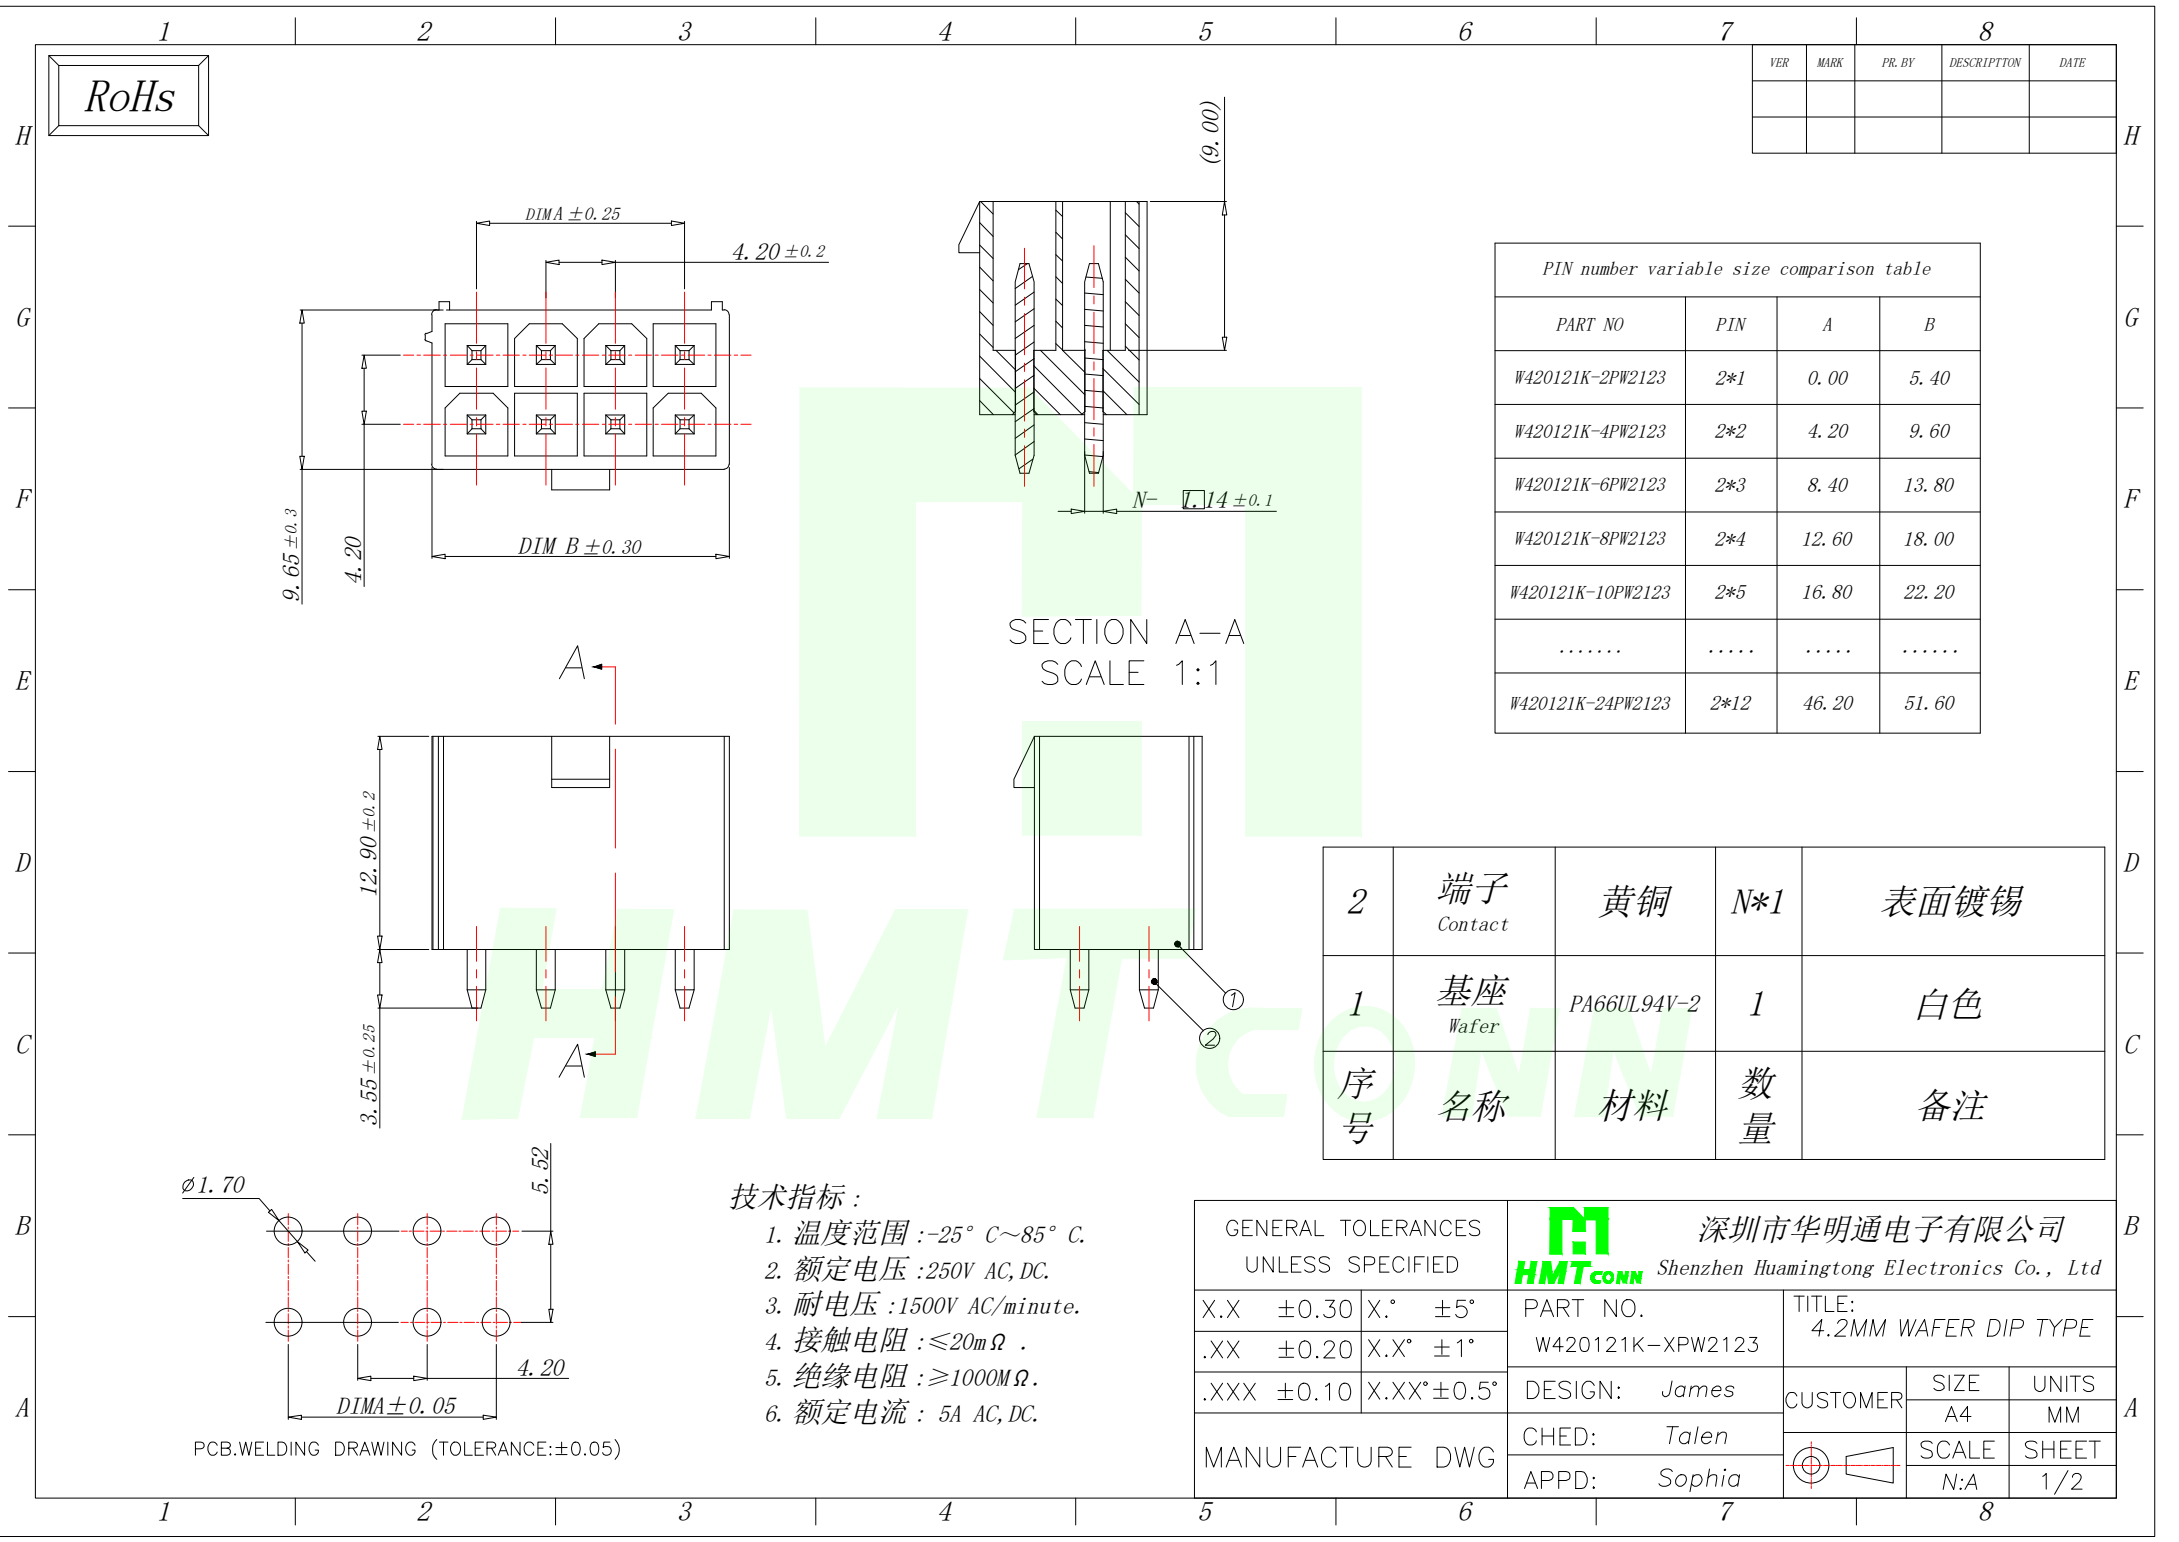

RoHs

VER	MARK	PR. BY	DESCRIPTION	DATE

PIN number variable size comparison table			
PART NO	PIN	A	B
W420121K-2PW2123	2*1	0.00	5.40
W420121K-4PW2123	2*2	4.20	9.60
W420121K-6PW2123	2*3	8.40	13.80
W420121K-8PW2123	2*4	12.60	18.00
W420121K-10PW2123	2*5	16.80	22.20
.....			
W420121K-24PW2123	2*12	46.20	51.60

2	端子 Contact	黄铜	N*1	表面镀锡
1	基座 Wafer	PA66UL94V-2	1	白色
序号	名称	材料	数量	备注

- 技术指标：
1. 温度范围：-25° C~85° C.
 2. 额定电压：250V AC,DC.
 3. 耐电压：1500V AC/minute.
 4. 接触电阻：≤20mΩ .
 5. 绝缘电阻：≥1000MΩ .
 6. 额定电流：5A AC,DC.

GENERAL TOLERANCES UNLESS SPECIFIED		HMTCONN 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd	
X.X ±0.30	X.° ±5°	PART NO. W420121K-XPW2123	TITLE: 4.2MM WAFER DIP TYPE
.XX ±0.20	X.X° ±1°	DESIGN: James	CUSTOMER
.XXX ±0.10	X.XX° ±0.5°	CHED: Talen	SIZE A4
MANUFACTURE DWG		APPD: Sophia	UNITS MM
			SCALE N:A
			SHEET 1/2

