

ROHS


Specifications(规格):

1. Impedance (特性阻抗) : 50Ω;
2. Frequency (工作频率) : DC~6GHz;
3. VSWR (电压驻波比) : 1.50@3GHz; 1.60@6GHz;
4. Insulation resistance (绝缘阻抗) : $\geq 100\text{M}\Omega$;
5. Dielectric withstand voltage (介质耐


PART NO.:

$$\frac{XZ}{(1)} \frac{X}{(2)} - K1M - \frac{XXXX}{(3)} - K1F - \frac{X}{(4)} \frac{X}{(5)}$$

- ① Cable TYPE:
3: RG174
4: 1.5DS
6: RG58
7: Dacor302
8: RG174LL
9: RG58LL
- ② Successive number: 1~Z
- ③ Length (mm): 1000=1000mm
- ④ Coding A: A~Z
- ⑤ Coding B: A~Z

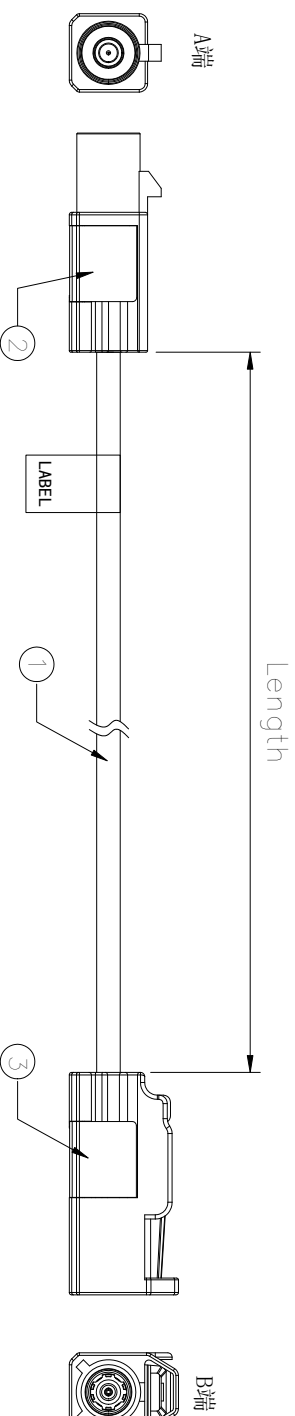

接点表(Wiring Table)

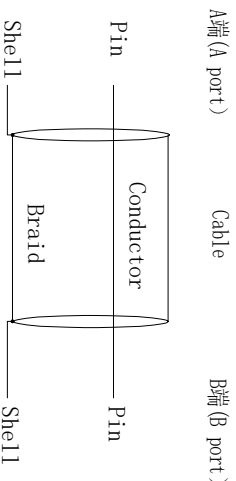

PART NO.	Length (mm/inch)	TOLERANCES (mm/inch)
XZ81-K1M-500-K1F-ZZ	500 [19.685]	±10 [0.394]
XZ81-K1M-1000-K1F-ZZ	1000 [39.370]	±15 [0.591]
XZ81-K1M-1500-K1F-ZZ	1500 [59.055]	±15 [0.591]
XZ81-K1M-2000-K1F-ZZ	2000 [78.740]	±20 [0.787]
XZ81-K1M-3000-K1F-ZZ	3000 [118.110]	±30 [1.181]
XZ81-K1M-5000-K1F-ZZ	5000 [196.851]	±60 [2.362]

3	Connector	FAKRA Female connector,Z Code	1SET	
2	Connector	FAKRA Male connector,Z Code	1SET	
1	Cable	Rg174LL Cable PVC OD2.80mm Black,-40~105℃		
NO.	NAME	SPEC.	Q'TY	NOTE
		www.helloxb.com	www.helloxb.cn	www.xk-dt.cn



XXKB 星科

Connector

DESIGN	希文	VIEW:		MODEL TYPE:	Assembly cable, FAKRA series
CHECKED		UNIT:	mm/in	PART NO.:	XZ81-K1M-XXXX-K1F-ZZ
APPROVED		SIZE:	A4	DWG NO.:	X-XZ81-K1M-XXXX-K1F-ZZ
XKB INDUSTRIAL PRECISION CO.,LIMITED				SCALE	PAGE
				N/A	1/1
					REVISION
					A0