

NOTES:

备注

1.Copper,nickel base,matte tin

黄铜H62, 镍底, 镀雾锡

2.Wire screw hole M4

压线螺孔M4

3.Current Rating: 60A

额定电流: 60A

4.Operating temperature: -40℃ ~ +125℃



工作温度: -40℃ ~ +125℃

5.There shall be no defects such as pin deformation and burrs.

不得有脚变形, 毛刺等缺陷

6.Unmarked dimensions refer to tolerances

未标注的尺寸参考公差

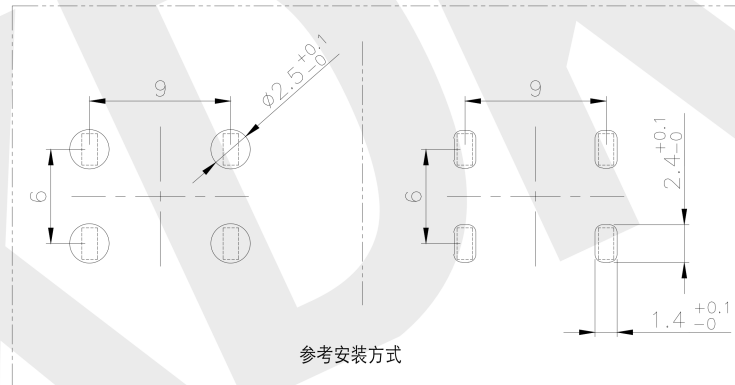


参考安装方式

Ordering Information

XD - * * * * - **** - D *** * - 02

Type M=Full Teeth (插牙)
Screw Thread 3=M3 (螺牙)
Welding Feet 4=M4 (螺牙)
T=Anti Twist (防止扭动)
Series 0808=8x8mm
D=DIP S=SMT
Product No. 1014=10x14mm
Material 默认=Copper (黄铜)
RC=Red Copper (紫铜)



GENERAL TOLERANCE

DRAWING

02

DIM TOL

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3.0°

审核

CHECK

批准

APPROVAL

比例

SCALE

投影

Projection



深圳讯答科技有限公司

ShenzhenXunDaTechnology Co.,Ltd

产品名称

TITLE

产品料号

PART NO.

材料

MATERIAL

PCB 焊接端子 (插板 铜垫片 M4 4焊脚 10x8x13mm)

XD-RG44-1109-D061-02

版本 REV.

单位 UNITS

页次 SHEET

A

mm

1/1