


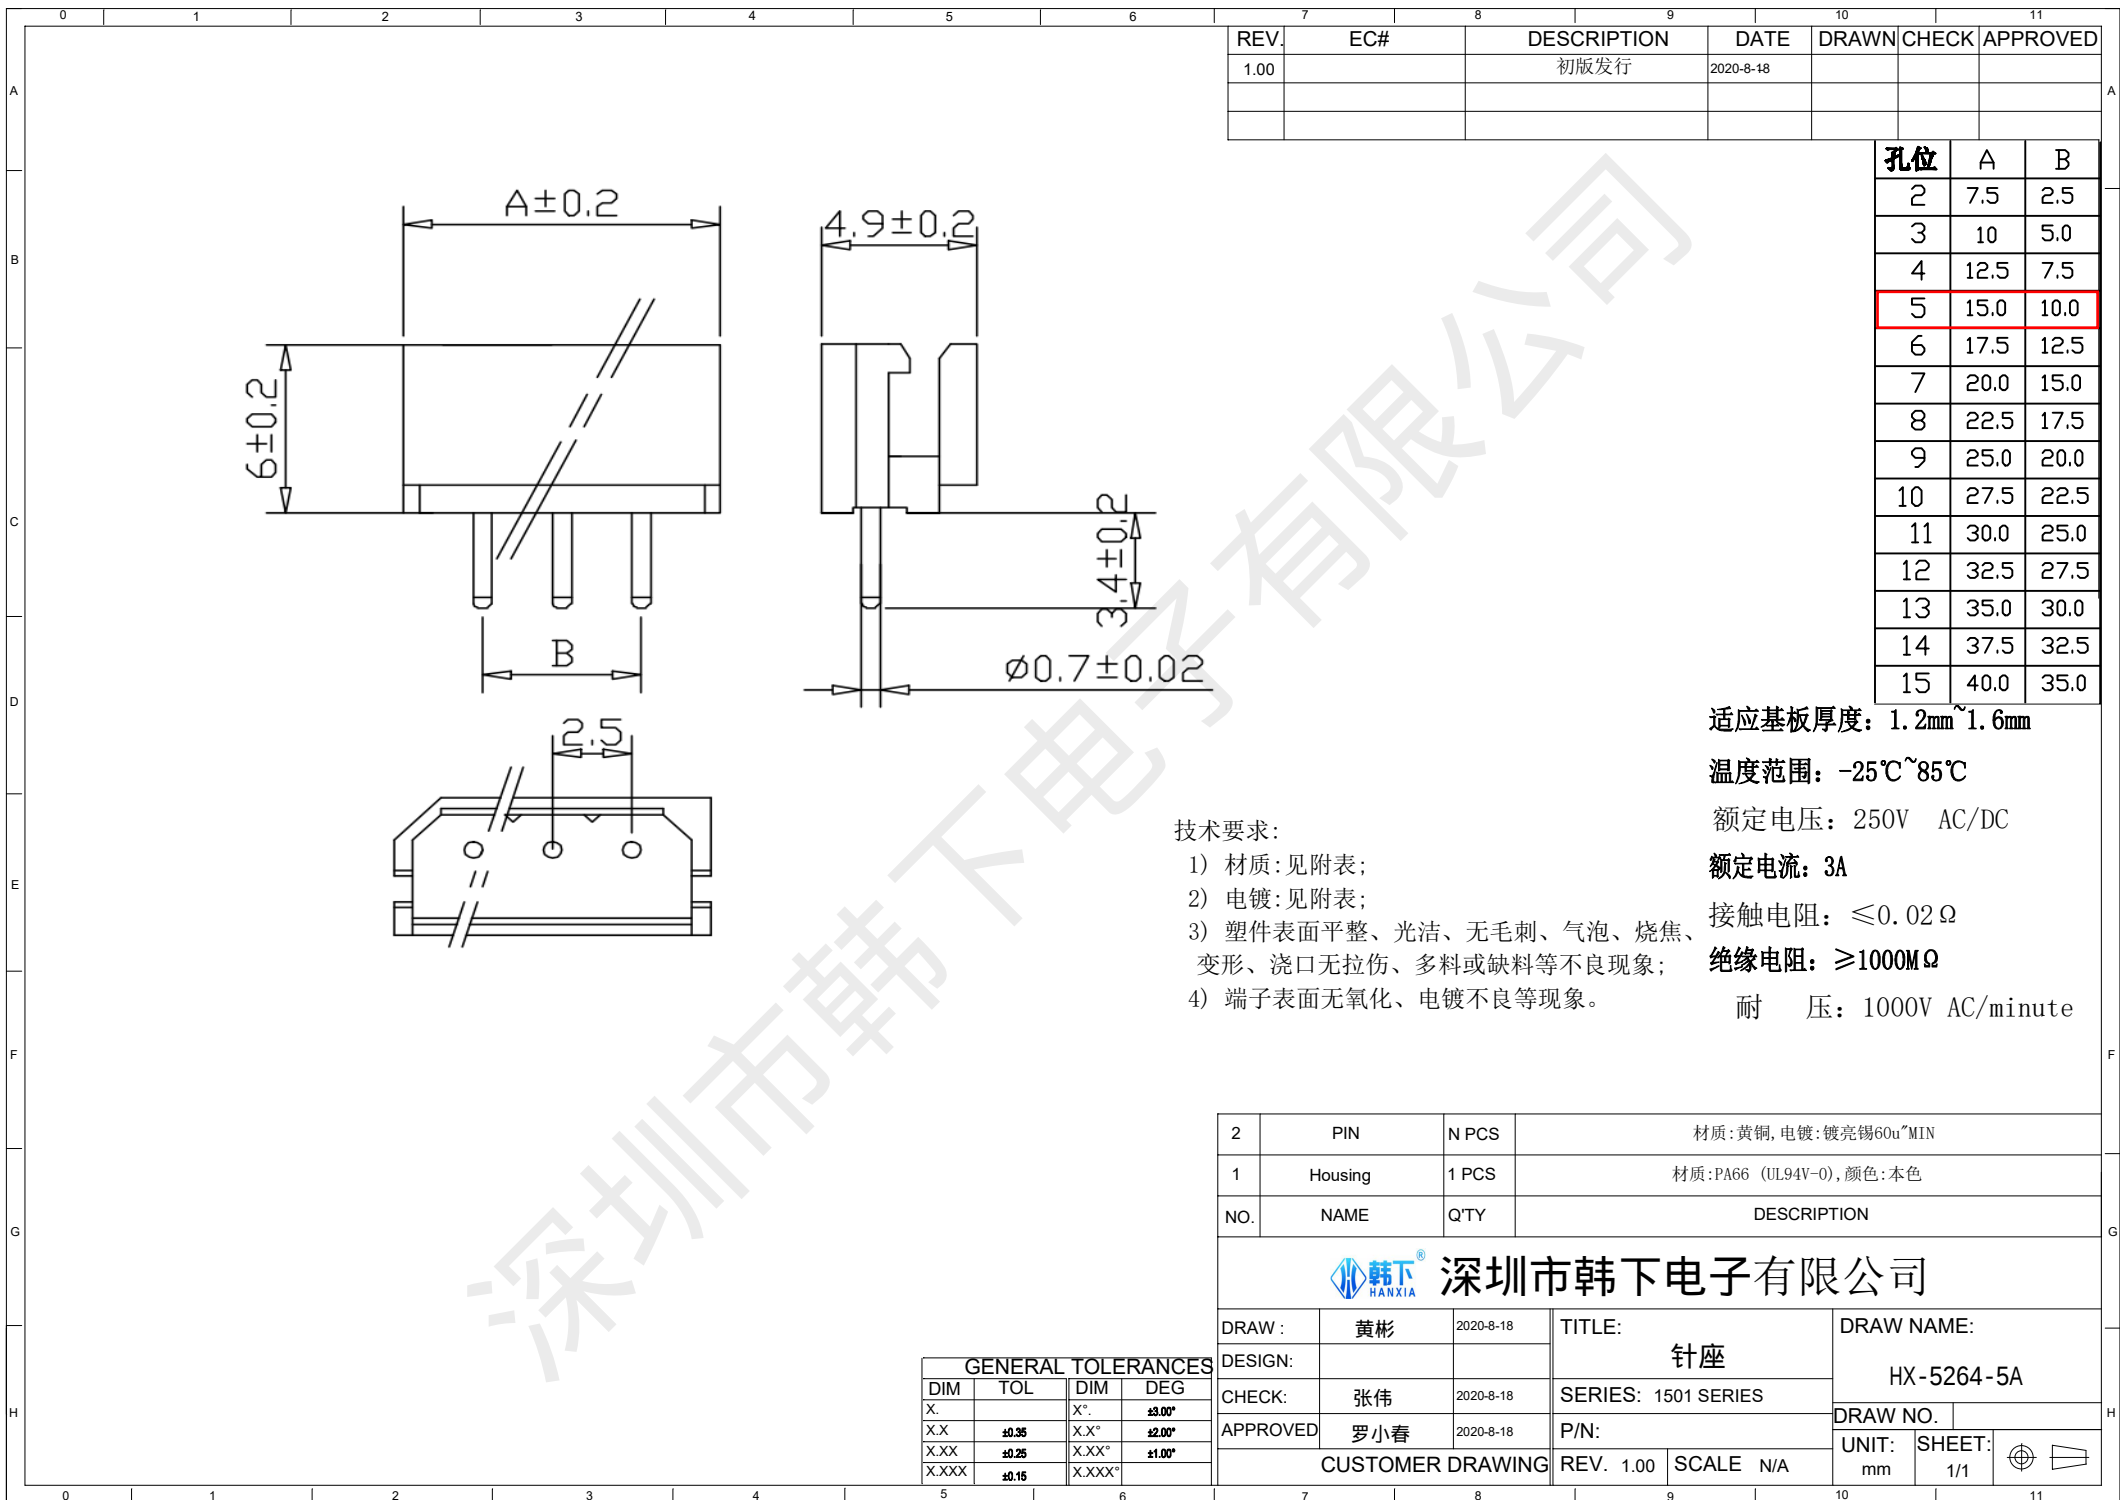

REV.	EC#	DESCRIPTION	DATE	DRAWN	CHECK	APPROVED
1.00		初版发行	2020-8-18			

孔位	A	B
2	7.5	2.5
3	10	5.0
4	12.5	7.5
5	15.0	10.0
6	17.5	12.5
7	20.0	15.0
8	22.5	17.5
9	25.0	20.0
10	27.5	22.5
11	30.0	25.0
12	32.5	27.5
13	35.0	30.0
14	37.5	32.5
15	40.0	35.0

适应基板厚度: 1.2mm~1.6mm

温度范围: -25℃~85℃

额定电压: 250V AC/DC

额定电流: 3A

接触电阻: $\leq 0.02 \Omega$

绝缘电阻: $\geq 1000M \Omega$

耐 压: 1000V AC/minute

技术要求:

- 1) 材质: 见附表;
- 2) 电镀: 见附表;
- 3) 塑件表面平整、光洁、无毛刺、气泡、烧焦、变形、浇口无拉伤、多料或缺料等不良现象;
- 4) 端子表面无氧化、电镀不良等现象。

PIN		N PCS	材质: 黄铜, 电镀: 镀亮锡60u~MIN			
1	Housing	1 PCS	材质: PA66 (UL94V-0), 颜色: 本色			
NO.	NAME	Q'TY	DESCRIPTION			
 深圳市韩下电子有限公司						
DRAW :		黄彬	2020-8-18	TITLE:		DRAW NAME:
DESIGN:				针座		HX-5264-5A
CHECK:		张伟	2020-8-18	SERIES: 1501 SERIES		DRAW NO.
APPROVED		罗小春	2020-8-18	P/N:		UNIT:
CUSTOMER DRAWING				REV. 1.00	SCALE N/A	SHEET:
					mm	1/1
						