


Plastic-Encapsulate Transistors
TRANSISTOR(PNP)

FEATURES

- ◆Power Dissipation of 500mW
- ◆High Breakdown Voltage
- ◆Low Collector-Emitter Saturation Voltage

MECHANICAL DATA

- ◆SOT-89 Small Outline Plastic Package
- ◆Epoxy UL: 94V-0
- ◆Mounting Position: Any

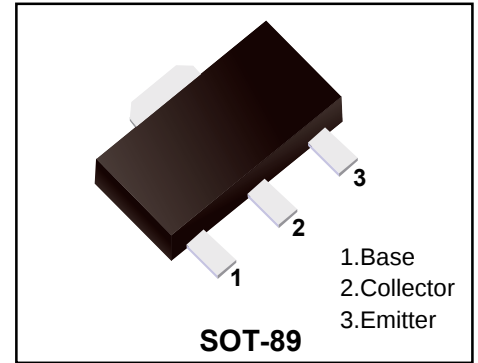

Marking Code	
MPSA94SI	A94

Maximum Ratings & Thermal Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)









Characteristics	Symbols	Value	Units
Collector-Base Voltage	V_{CB0}	-400	V
Collector-Emitter Voltage	V_{CE0}	-400	V
Emitter -Base Voltage	V_{EB0}	-5	V
Collector Current-Continuous	I_C	-200	mA
Collector Current-pulsed	I_{CM}	-300	mA
Collector Power Dissipation	P_C	500	mW
Junction Temperature	T_J	150	°C
Storage Temperature	T_{STG}	-55 to +150	°C
Thermal resistance From junction to ambient	$R_{\theta JA}$	250	°C/W

Electrical Characteristics (Ratings at 25°C ambient temperature unless otherwise specified.)

Parameter	Test Conditions	Symbol	Min	Typ.	Max	Unit
Collector-base breakdown voltage	$I_C = -100\mu A, I_E = 0$	$V_{(BR)CBO}$	-400			V
Collector-emitter breakdown voltage *	$I_C = -1mA, I_B = 0$	$V_{(BR)CEO}$	-400			V
Emitter-base breakdown voltage	$I_E = -100\mu A, I_C = 0$	$V_{(BR)EBO}$	-5			V
Collector cut-off current	$V_{CB} = -400V, I_E = 0$	I_{CBO}			-100	nA
	$V_{CE} = -400V, I_B = 0$	I_{CEO}			-5	uA
Emitter cut-off current	$V_{EB} = -4V, I_C = 0$	I_{EBO}			-100	nA
DC current gain *	$V_{CE} = -10V, I_C = -1mA$	$h_{FE(1)}$	70			
	$V_{CE} = -10V, I_C = -10mA$	$h_{FE(2)}$	80	300		
	$V_{CE} = -10V, I_C = -50mA$	$h_{FE(3)}$	80			
	$V_{CE} = -10V, I_C = -100mA$	$h_{FE(4)}$	60			
Collector-emitter saturation voltage *	$I_C = -10mA, I_B = -1mA$	$V_{CE(sat)}$			-0.2	V
	$I_C = -50mA, I_B = -5mA$				-0.3	V
Base -emitter saturation voltage *	$I_C = -10mA, I_B = -1mA$	$V_{BE(sat)}$			-0.75	V
Transition frequency	$V_{CE} = -20V, I_C = 10mA, f = 30MHz$	f_T	50			MHz

*Pulse test: pulse width≤300us, duty cycle≤2.0%

Typical Characteristics

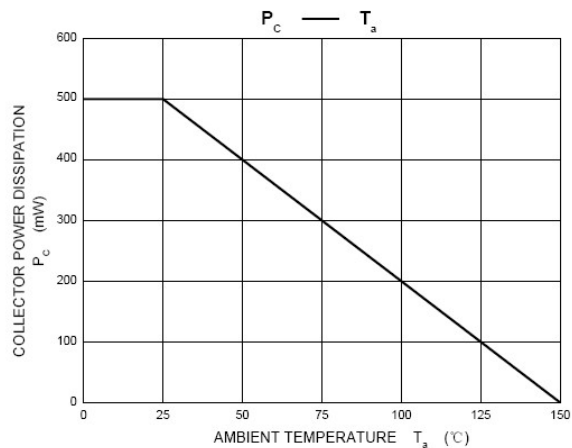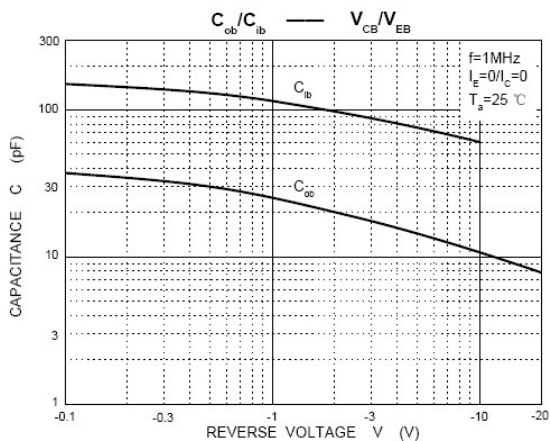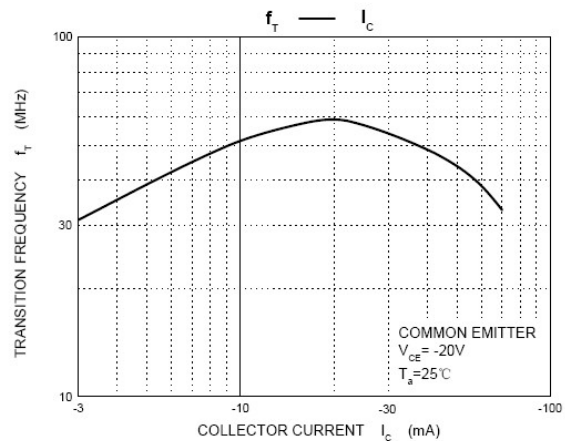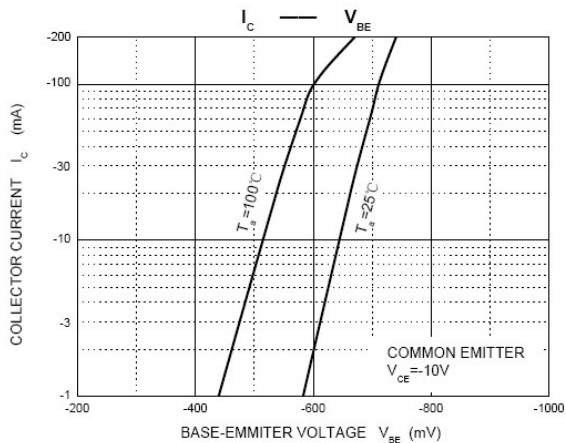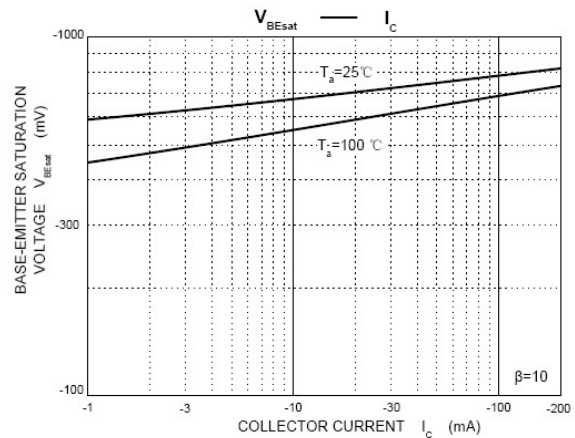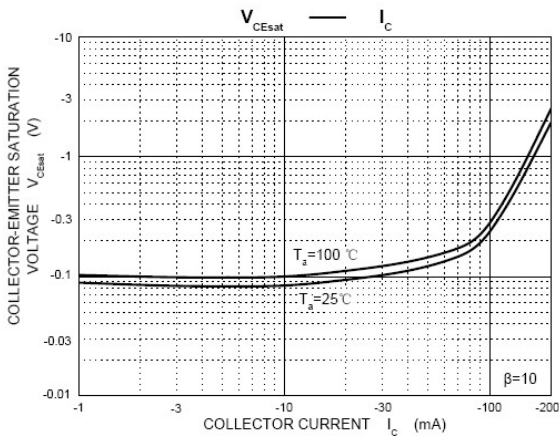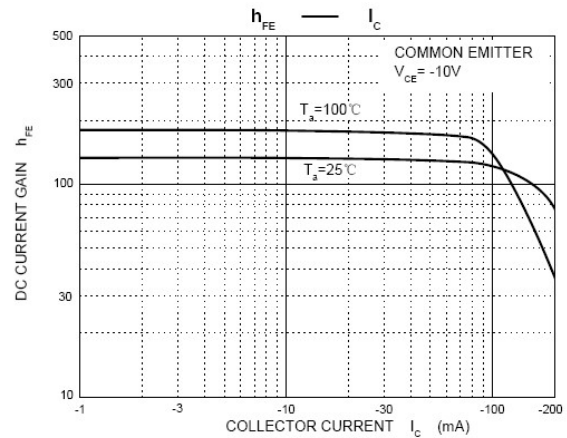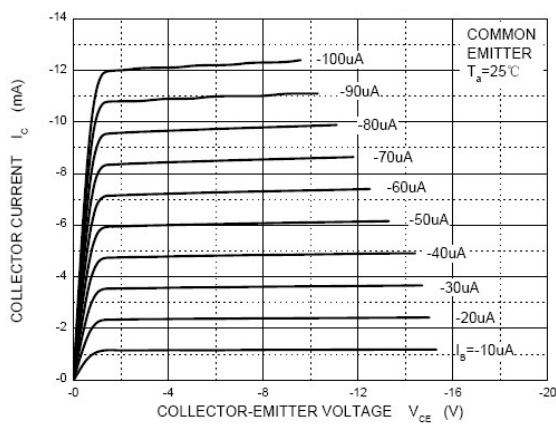

Ordering information


Package	Packing Description	Base Quantity	Packing Quantity
SOT-89	Tape/Reel, 7" reel	1000pcs/Reel	6000PCS/Box 30000PCS/Carton

Package Dimensions

SOT-89

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	1.40	1.60	0.055	0.063
b	0.32	0.52	0.013	0.020
b1	0.38	0.58	0.015	0.023
c	0.35	0.45	0.014	0.018
D	4.40	4.60	0.173	0.181
D1	1.45	1.65	0.057	0.065
D2	1.70	1.80	0.067	0.071
E	2.30	2.60	0.091	0.102
E1	3.95	4.25	0.156	0.167
E2	1.80	2.00	0.071	0.079
e	1.40	1.60	0.055	0.063
e1	2.80	3.20	0.110	0.126
L	0.90	1.20	0.035	0.047

The recommended mounting pad size

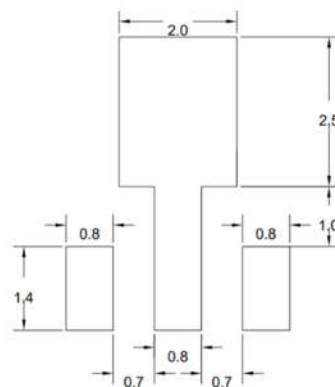

UNIT:MM

Disclaimer

The information presented in this document is for reference only. Guangdong Youfeng Microelectronics Co.,Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise. The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), YFW or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale. This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <https://www.yfwdiode.com>, or consult YFW sales office for further assistance.