

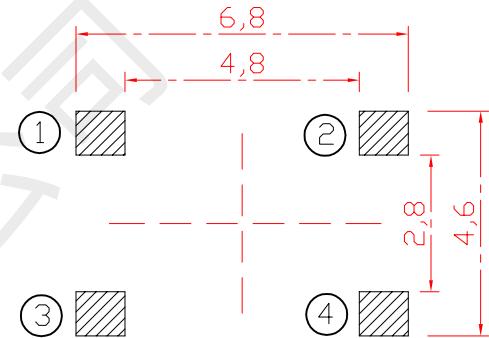
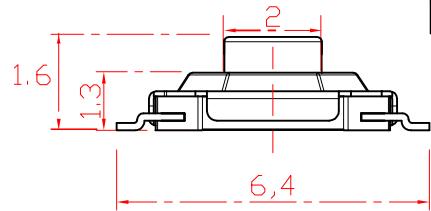


H	
1.5	1.6
1.7	2.0
2.5	3.0
3.5	4.0
4.5	5.0
5.5	



PCB. 焊接图

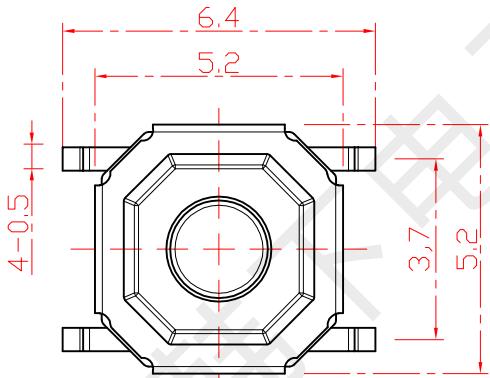

## 电 路 图

主要技术规格：


1. 额定值: 50mA DC12V
  2. 接触电阻:  $\leqslant 100\text{m}\Omega$
  3. 操作力:  $250 \pm 50\text{gf}$
  4. 行程:  $0.25 \pm 0.10\text{mm}$
  5. 绝缘电阻:  $\geqslant 100\text{M}\Omega$
  6. 抗电强度: 250V 50HZ 1Min.
  7. 寿命: 100,000 Cycles

材料：

本体:	LCP	(灰色)
按钮:	黄铜	(酸洗)
卡件:	磷铜	(镀银)
弹片:	不锈钢	(镀银)
盖板:	不锈钢	
防水层:	聚酰亚胺	



 韩下® 深圳市韩下电子有限公司



第一视角

深圳市韩下电子有限公司					第一视角			
标记	处数	更改文件号		签 名	日 期	比例	一般公差	
设 计		黄彬		2021.08.25	单 位	mm	>0.5~2	±0.10
审 核		张伟		2021.08.28	重 量		>2~5	±0.25
批 准		罗小春		2021.08.30			>5~10	±0.30
							角度	±0.5°