

LW-Series

Wiper / Washer Controls

PRODUCT WEBPAGE

request sample, configure part



The LW-Series Electronic Wiper Washer Control combines two switches into one self-contained unit allowing effortless control of both wash and wipe functions from a singular location. A variety of features and options including, Continuous low and high speed wiper positions, Six intermittent delay intervals ranging from 3-18 seconds, Push-to-wash button and an LED Night-light indicator combine to provide the flexibility to meet most any Cab design.

2
Poles **1-8**
Amps **14-28**
VDC

Typical Applications

- On/Off-Highway Equipment
- Agricultural Equipment
- Construction Equipment

Tech Specs

Electrical

Contact Rating	1 relay 8 amps, 14VDC 4 amps, 28VDC 2 relays 1 amps, 14VDC 1 amps, 28VDC
Terminals	.187 (7.4mm) Quick Connect terminations standard.
Protection	Reverse polarity protection Over voltage protection Cold cranking protection according to SAE J1455, Sections. 4.11.1.1 and 4.11.1.2.1 Transient voltage protection which includes load dump and inductive switching according to SAE J1455, sec. 4.11.2.2 Electrostatic discharge protection according to SAE J1455 Sec. 4.11.2.2.5.1 (Discharge a 150 pf capacitor that has been charged to a potential of 15kV through 150 Ohm resistor.) Meets all other EMI/EMC requirements for class C trucks.

Mechanical


Mechanical	<p>Sinusoidal Vibration: 10-55-10 Hz, 0.06" DA, one minute-cycle, three hours/axis</p> <p>Random Vibration: Three hours/axis, three mutually perpendicular axes with a test level 4G's.</p> <table> <thead> <tr> <th>Frequency</th><th>Amplitude</th></tr> </thead> <tbody> <tr> <td>5Hz</td><td>0.16 G2/Hz</td></tr> <tr> <td>100Hz</td><td>0.16 G2/Hz</td></tr> <tr> <td>500Hz</td><td>-3dB/octave roll-off</td></tr> </tbody> </table> <p>Tests were conducted according to SAE J1455, Sec 5.7 and Sec. 4.9.4.</p> <p>Shock: MIL-STD-202G Method 213B, Test Condition K, 30G's, 11 ms.</p>	Frequency	Amplitude	5Hz	0.16 G2/Hz	100Hz	0.16 G2/Hz	500Hz	-3dB/octave roll-off
Frequency	Amplitude								
5Hz	0.16 G2/Hz								
100Hz	0.16 G2/Hz								
500Hz	-3dB/octave roll-off								
Endurance	According to SAE J2349, March 97 for windshield washer switch for Trucks, Buses and Multipurpose Vehicles (20,000 cycle minimum).								

Physical


Illumination	LED, rated 100,000 hours 1/2 life
Cover	Acetate
Washer Actuator	Silicone
Toggle Actuator	Nylon 6/6 glass filled
Bracket	Nylon 6/6
Connector	Nylon 6/6 rated 85°C polarized
Washer Function	Momentary
Toggle Function	Maintained Intermittent
Operation	Momentary
Weight	44 grams

Environmental

Operating Temp.	-25°C to +85°C
Temperature Cycle	According to SAE J1455, Sec. 4.1.3.1 (See Figure below)

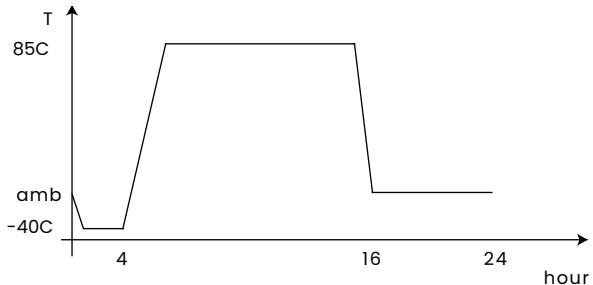

Thermal Shock	According to SAE J1455, Sec. 4.1.3.2 (See Figure below)
---------------	---

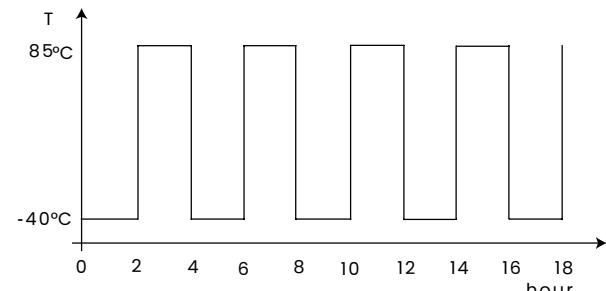

Humidity	According to SAE J1455, Sec. 4.2.3 (30 cycles for 8 hrs. with maximum temperature of 85°C and 95% relative humidity).
----------	---

Dust Bombardment	According to SAE J1455, Sec. 4.7.3 (with dust concentration of 0.88gm/m ³ for 24 hours.)
------------------	---

Salt Spray	MIL-STD-202G, Method 101D for 96 hours.
------------	---

Ordering Scheme

Sample Part Number LW 1 A 1 1 Z - 1 1 00 1 00

Selection 1 2 3 4 5 6

7 8 9 10 11

1. SERIES

LW Wiper/Washer Control with six intermittent positions:
low, high, wash/wipe

2. RATING

1	8A, 14VDC (1 relay)	4	1A, 14VDC (1 relay)
2	4A, 28VDC (1 relay)	5	1A, 14VDC (2 relay)
3	1A, 14VDC (1 relay)	6	1A, 28VDC (2 relay)

3. INTERMITTENT TIMING

A 2-15 seconds

4. WIPER/WASHER TIMING

1 3 seconds

5. LAMP #1 (ABOVE WASH)

Z	No Lamp	2	Red LED
1	Green LED	3	Amber LED

6. LAMP #2 (ABOVE WIPE)

Z	No Lamp	2	Red LED
1	Green LED	3	Amber LED

7. BRACKET COLOR

1 Black

8. ROCKER / PADDLE COLOR

1 Black


9. LEGEND #1

00 No legend

For standard legends, see "Standard Legend Codes" page
For additional legends, please consult factory

10. LEGEND ORIENTATION

0	No legend
1	Vertical (lamp 1 on top)
2	Horizontal (lamp 1 on right)



11. LEGEND #2

00 No legend


For standard legends, see "Standard Legend Codes" page
For additional legends, please consult factory

Notes:

1 Relay coil current is 1A max. Relay must have an arc suppression in parallel with the coil. Ref P/N LC2-01 for black wiper/washer connector housing.

Dimensional Specs

inches [millimeters]

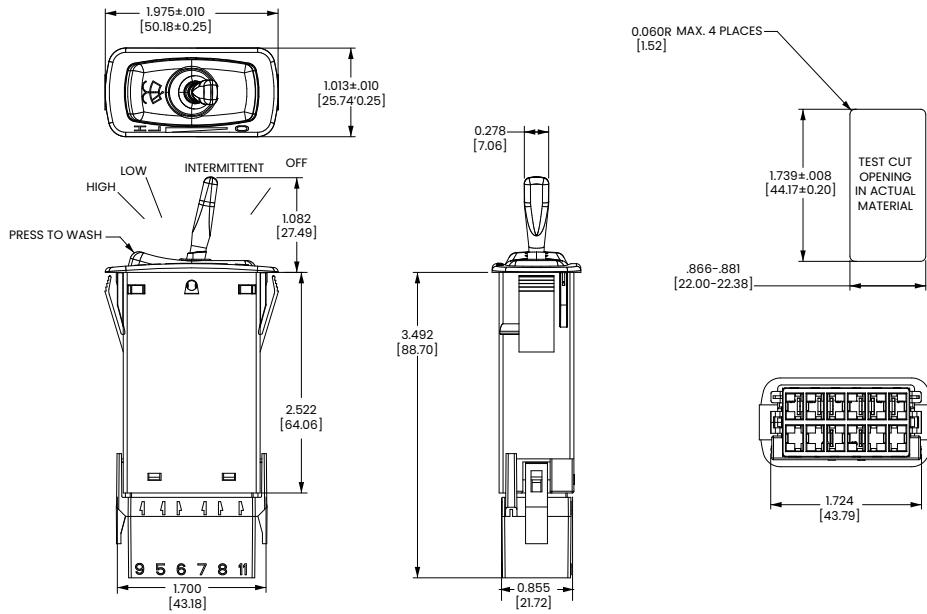

Principles of operation:

From the OFF position, moving the toggle one step up puts the function into the intermittent slower mode (18 sec.). Moving the toggle another step up reduces the delay time by 3 sec for each of the next six steps. The seventh step up puts the motor into a continuous low-speed mode and the last step up puts the motor into the high-speed mode. Reversing the previous steps puts the motor finally into the stop/parking mode. During the OFF position, intermittent and low-speed modes, pressing the wash button activates the wash function. Wipe function starts after a two second delay from the onset of the washing and continues for three continuous wipes after the wash button is released. For convenience, the wash function is not active during the high-speed mode.

The Wiper Control is designed to interface with single or dual relay systems for intermittent delay and the park function. The high speed is driven directly via a power transistor internal to the module. The coil of the relay is pulled down to ground during the intermittent, low-speed and high-speed modes respectively. (Contact Carling Technologies for wiring diagrams)

Standard Legend Codes

YK	UA	UB	US	UV	UW	UX	UY	MP	MR	PX	MS	MT
VU	MW	NZ	NX	NY	YM	VW	PS	PW	PZ	WG	WM	RN
RP	YG	TX	VD	VE	VF	VG	SH	SM	SN	SP	SR	SY
DIM	BRIGHT											
WY	WZ	UH	UJ	PD	PE	PF	VC	VJ	UF	UG	MU	TN
NS	PB	SE	VZ	YE	NN	RW	PU	WA	YN	UE	NM	RJ
NR	YD	TL	VR	SL	VA	UC	VN	PK	VY	UZ	RH	NU
NV	RB	RC	RK	RL	MZ	RG	WS	WT	UD	UR	WD	TY
PA	UK	WR	UU	UT	YR	PM	VV	WB	TB	TC	TD	TE
MY	PV	TA	TZ	WC	PT	PN	PH	RA	TU	TT	YL	SK
VS	UL	UM	WK	TS	VT	WL	VP	YJ	PJ	RY	UP	NW
NP	RE	RF	PP	PR	TV	PC	YT	YU	PL	WJ	MV	RR
TK	RT	SZ	VX	WF	WH	PG	SJ	YA	YB	RM	TM	RD
RS	UN	TP	TR	NT	MX	YC	TW	TJ	YF	TH	TF	TG
YS	YH	SX	RZ	YP	WN	WP	WW	WX	SA	SB	SC	SD
RAISE	LOWER	HIGH	LOW	FWD	REV	DEPTH	TRIM TAB	ACC	NAV ANCH	WIND LASS UP/DN	LIVE WELL	REAR
ST	SU	WU	WV	SV	SW	VB	VH	VK	VL	VM	WE	SF
PARK	AUTO											
SG	SS	RU	RV	RX								

Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit www.carlingtech.com/findarep.



About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With six ISO9001 and IATF16949 registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit www.carlingtech.com/company-profile.

To view all of Carling's environmental, quality, health & safety certifications please visit www.carlingtech.com/environmental-certifications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Carling Technologies:](#)

[LW1A11Z-1165100-XCS1](#) [LW2A11Z-1165100](#) [LW5A11Z-1165100-XCS1](#) [LW6A11Z-1165100-XCN1](#) [LW2A1ZZ-1165100](#) [LW1A1ZZ-11AG11K](#) [LW6A1ZZ-1100000](#) [LW2A11Z-11AY100](#) [LW1A11Z-11AG11K](#) [LW1A12Z-1165100](#) [LW5A1ZZ-11AG11K](#) [LW2A1ZZ-1100000](#) [LW6A11Z-1165100](#) [LW1A1ZZ-1100000](#) [LW2A13Z-1165100](#) [LW5A13Z-1165100](#)