


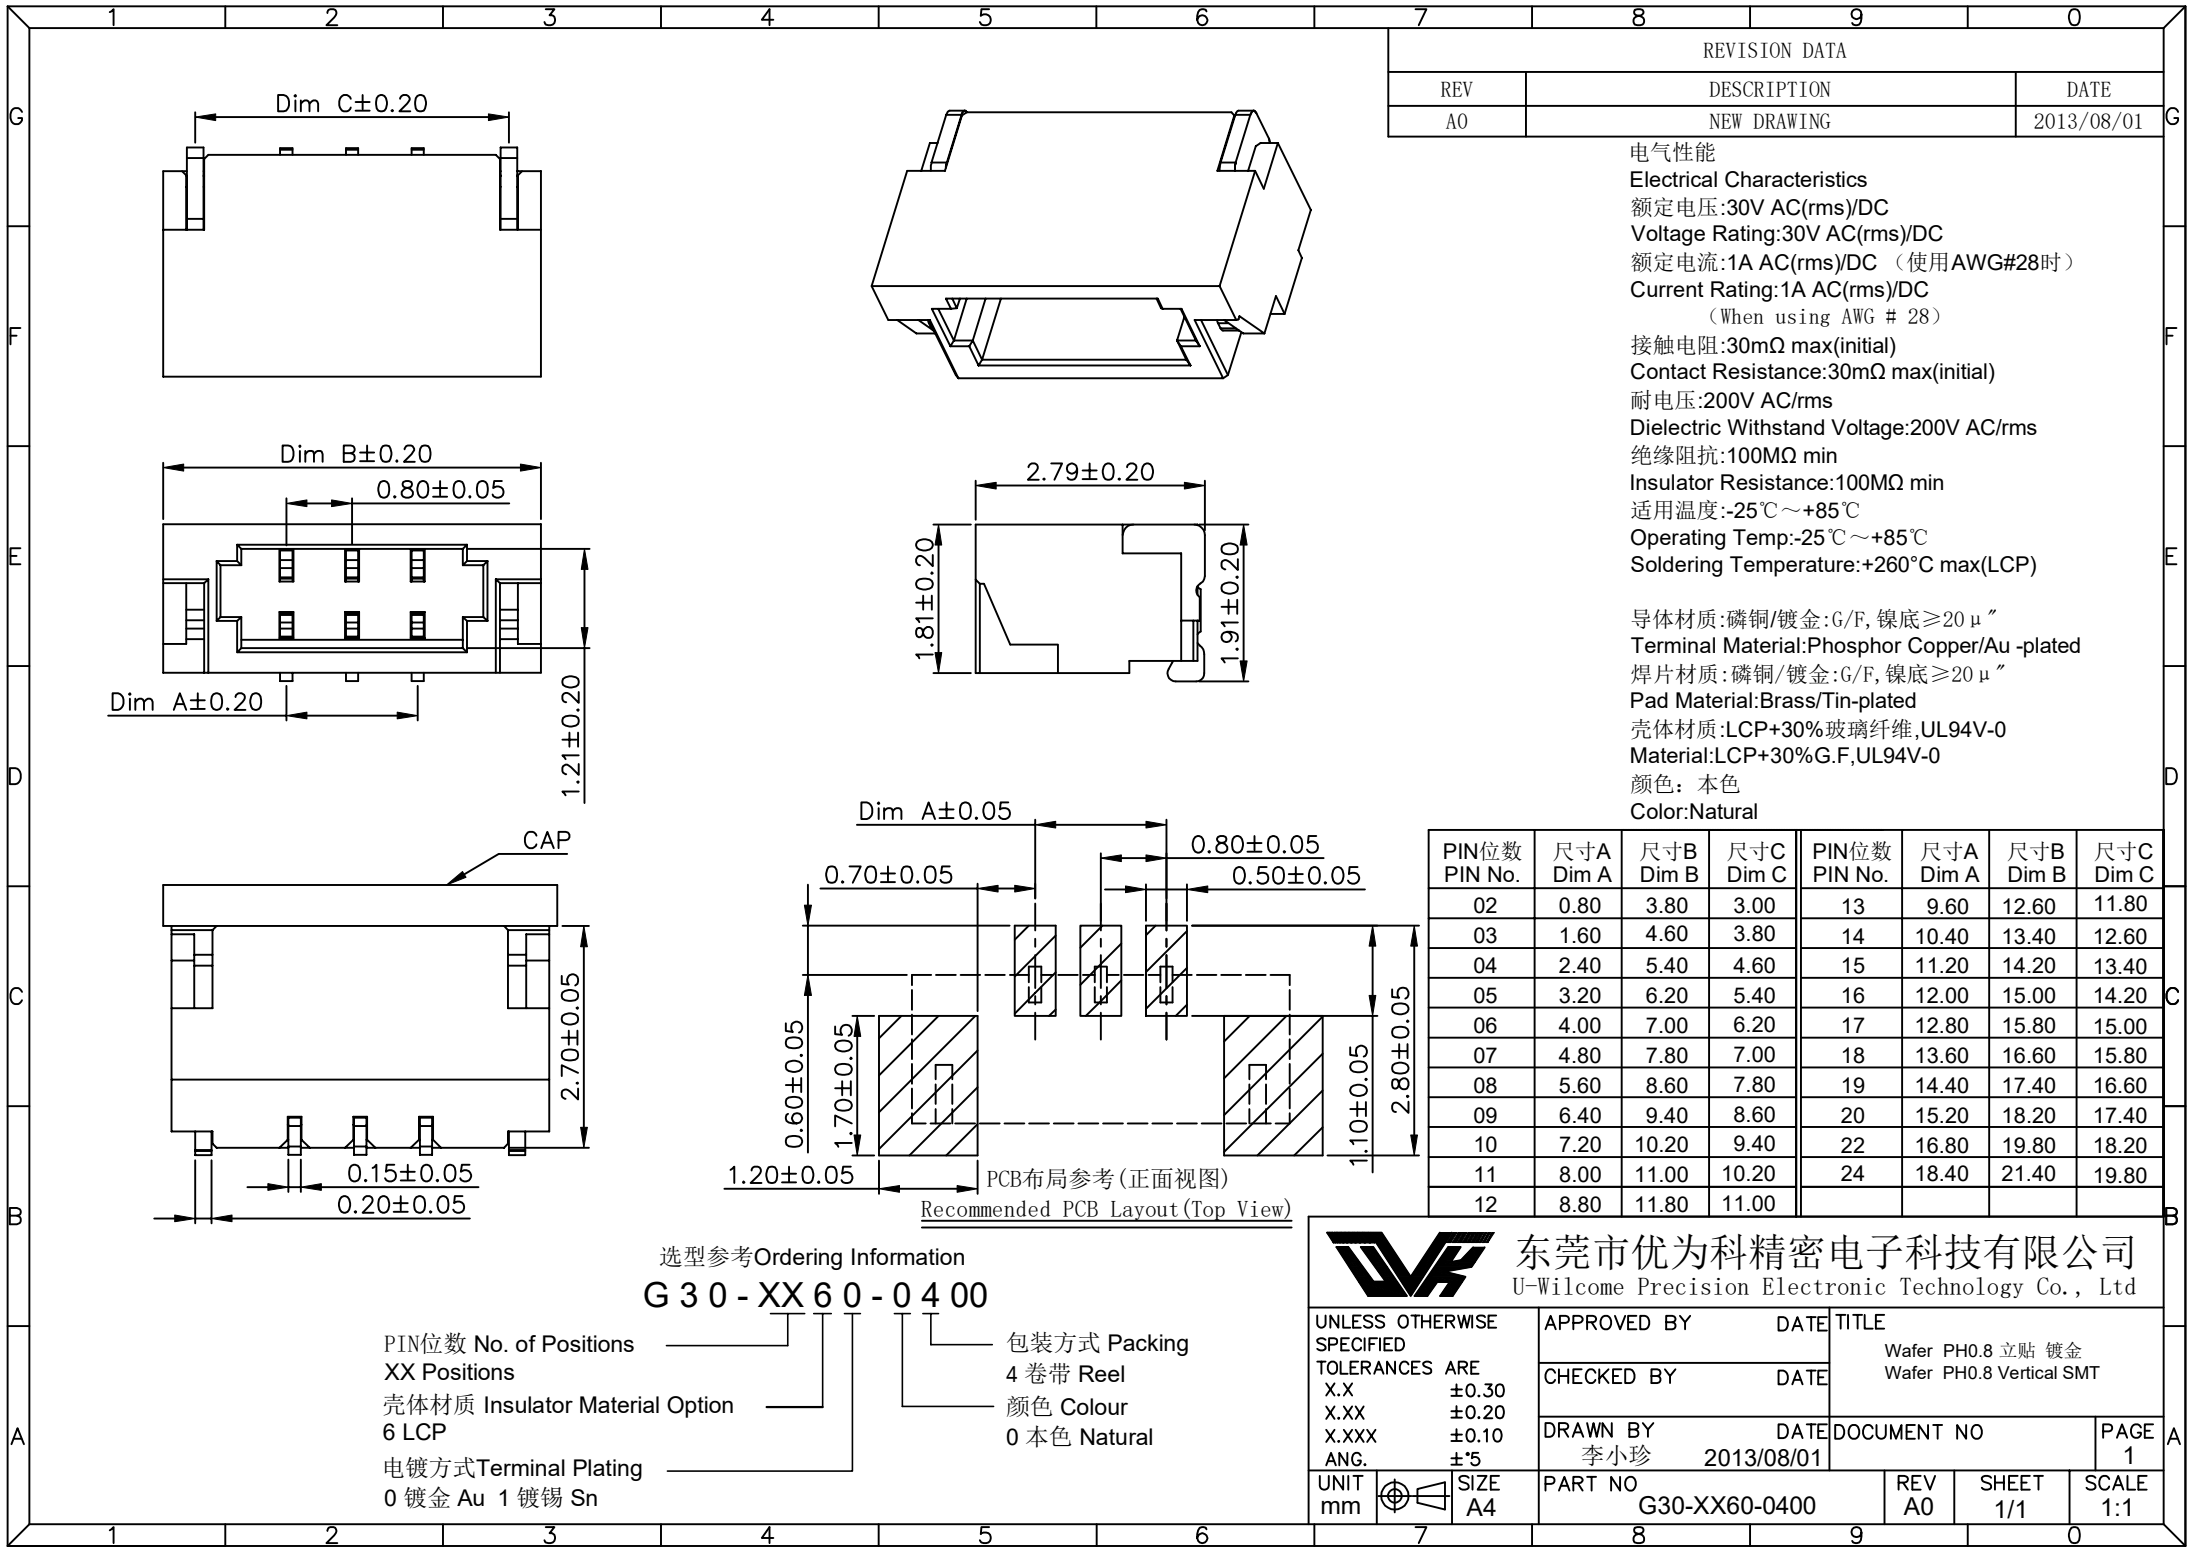

REVISION DATA		
REV	DESCRIPTION	DATE
A0	NEW DRAWING	2013/08/01

电气性能
Electrical Characteristics
额定电压:30V AC(rms)/DC
Voltage Rating:30V AC(rms)/DC
额定电流:1A AC(rms)/DC (使用AWG#28时)
Current Rating:1A AC(rms)/DC
(When using AWG # 28)
接触电阻:30mΩ max(initial)
Contact Resistance:30mΩ max(initial)
耐电压:200V AC/rms
Dielectric Withstand Voltage:200V AC/rms
绝缘阻抗:100MΩ min
Insulator Resistance:100MΩ min
适用温度:-25℃~+85℃
Operating Temp:-25℃~+85℃
Soldering Temperature:+260℃ max(LCP)

导体材质:磷铜/镀金:G/F, 镍底 $\geq 20\mu$ "
Terminal Material:Phosphor Copper/Au -plated
焊片材质:磷铜/镀金:G/F, 镍底 $\geq 20\mu$ "
Pad Material:Brass/Tin-plated
壳体材质:LCP+30%玻璃纤维,UL94V-0
Material:LCP+30%G.F,UL94V-0
颜色: 本色
Color:Natural

PIN位数 PIN No.	尺寸A Dim A	尺寸B Dim B	尺寸C Dim C	PIN位数 PIN No.	尺寸A Dim A	尺寸B Dim B	尺寸C Dim C
02	0.80	3.80	3.00	13	9.60	12.60	11.80
03	1.60	4.60	3.80	14	10.40	13.40	12.60
04	2.40	5.40	4.60	15	11.20	14.20	13.40
05	3.20	6.20	5.40	16	12.00	15.00	14.20
06	4.00	7.00	6.20	17	12.80	15.80	15.00
07	4.80	7.80	7.00	18	13.60	16.60	15.80
08	5.60	8.60	7.80	19	14.40	17.40	16.60
09	6.40	9.40	8.60	20	15.20	18.20	17.40
10	7.20	10.20	9.40	22	16.80	19.80	18.20
11	8.00	11.00	10.20	24	18.40	21.40	19.80
12	8.80	11.80	11.00				

选型参考Ordering Information

G 30 - XX 6 0 - 0 4 00

PIN位数 No. of Positions
XX Positions

壳体材质 Insulator Material Option
6 LCP

电镀方式Terminal Plating
0 镀金 Au 1 镀锡 Sn

包装方式 Packing
4 卷带 Reel
颜色 Colour
0 本色 Natural



东莞市优为科精密电子科技有限公司
U-Wilcome Precision Electronic Technology Co., Ltd

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X.X ± 0.30
X.XX ± 0.20
X.XXX ± 0.10
ANG. $\pm 5^\circ$



SIZE
A4

APPROVED BY DATE TITLE

CHECKED BY DATE

DRAWN BY DATE DOCUMENT NO
李小珍 2013/08/01

PART NO
G30-XX60-0400

Wafer PH0.8 立贴 镀金
Wafer PH0.8 Vertical SMT

REVISION SHEET
A0 1/1

SCALE
1:1

PAGE
1