

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range:-40℃~+105℃

温度范围: -40℃~+105℃

Insulation resistance:≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

Material:PA6T UL94V-0

材质: PA6T UL94V-0

Plating Category:1U"Gold




镀层: 1U"Gold

Reflow soldering temperature:260±5℃, 10S



回流焊温度: 260±5℃, 10S

X4611 F V S - XX - C43 D42 X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧


- 1.Series No
- 2.Category:F-Female
- 3.Welding Board Angle:V-Stright 180°
- 4.Welding Way:S-SMT
- 5.Row No.Pin No:XX-01~40Pin
- 6.Plastic Height:C=4.3mm
- 7.Pin pitch:D=4.2mm
- 8.Type:R1 ; R2

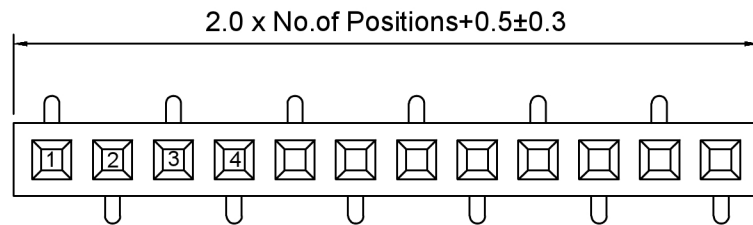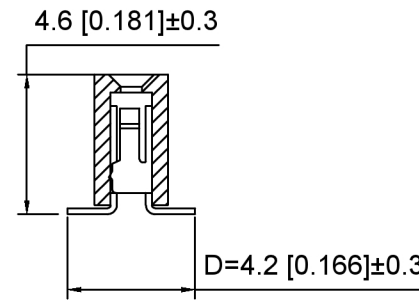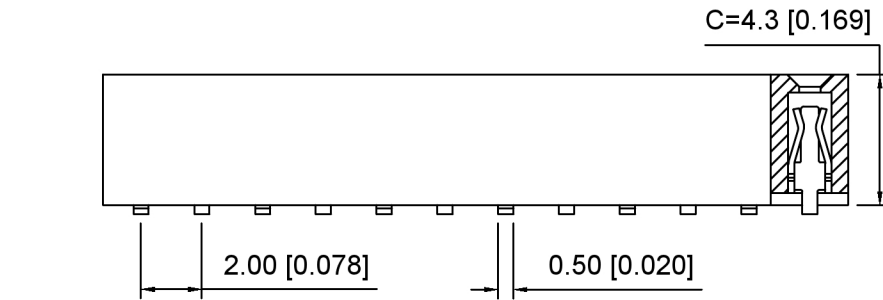

Type R1

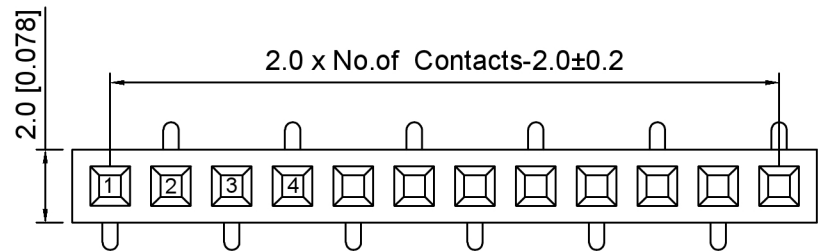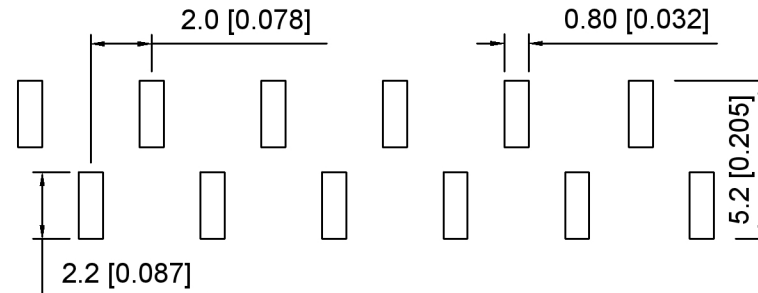

Type R2

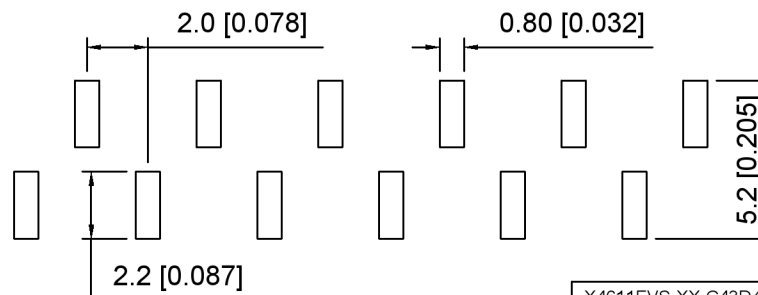

X4611FVS-XX-C43D42X	PA6T	Brass	X4611W
PART NO	Material	Material(Pin)	Suitable XKB Wafer

DSND		SCALE: N/A	MODEL TYPE: 2.0mm BTB Connector		
DWN		VIEW: 	PART NO.: X4611FVS-XX-C43D42X		
CHKD		UNIT: mm/in	DWG NO.: X-X4611FVS-XX-C43D42X		
APPD		SIZE: A4			
L PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

ANGULAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

UNSPECIFIED TOLERANCES

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

广东星坤科技股份有限公司

Δ*		日期
Δ*		日期
Δ*		日期

文件工程章

DESCRIPTION

DATE

REVISED

APPROVED

REVISIONS