


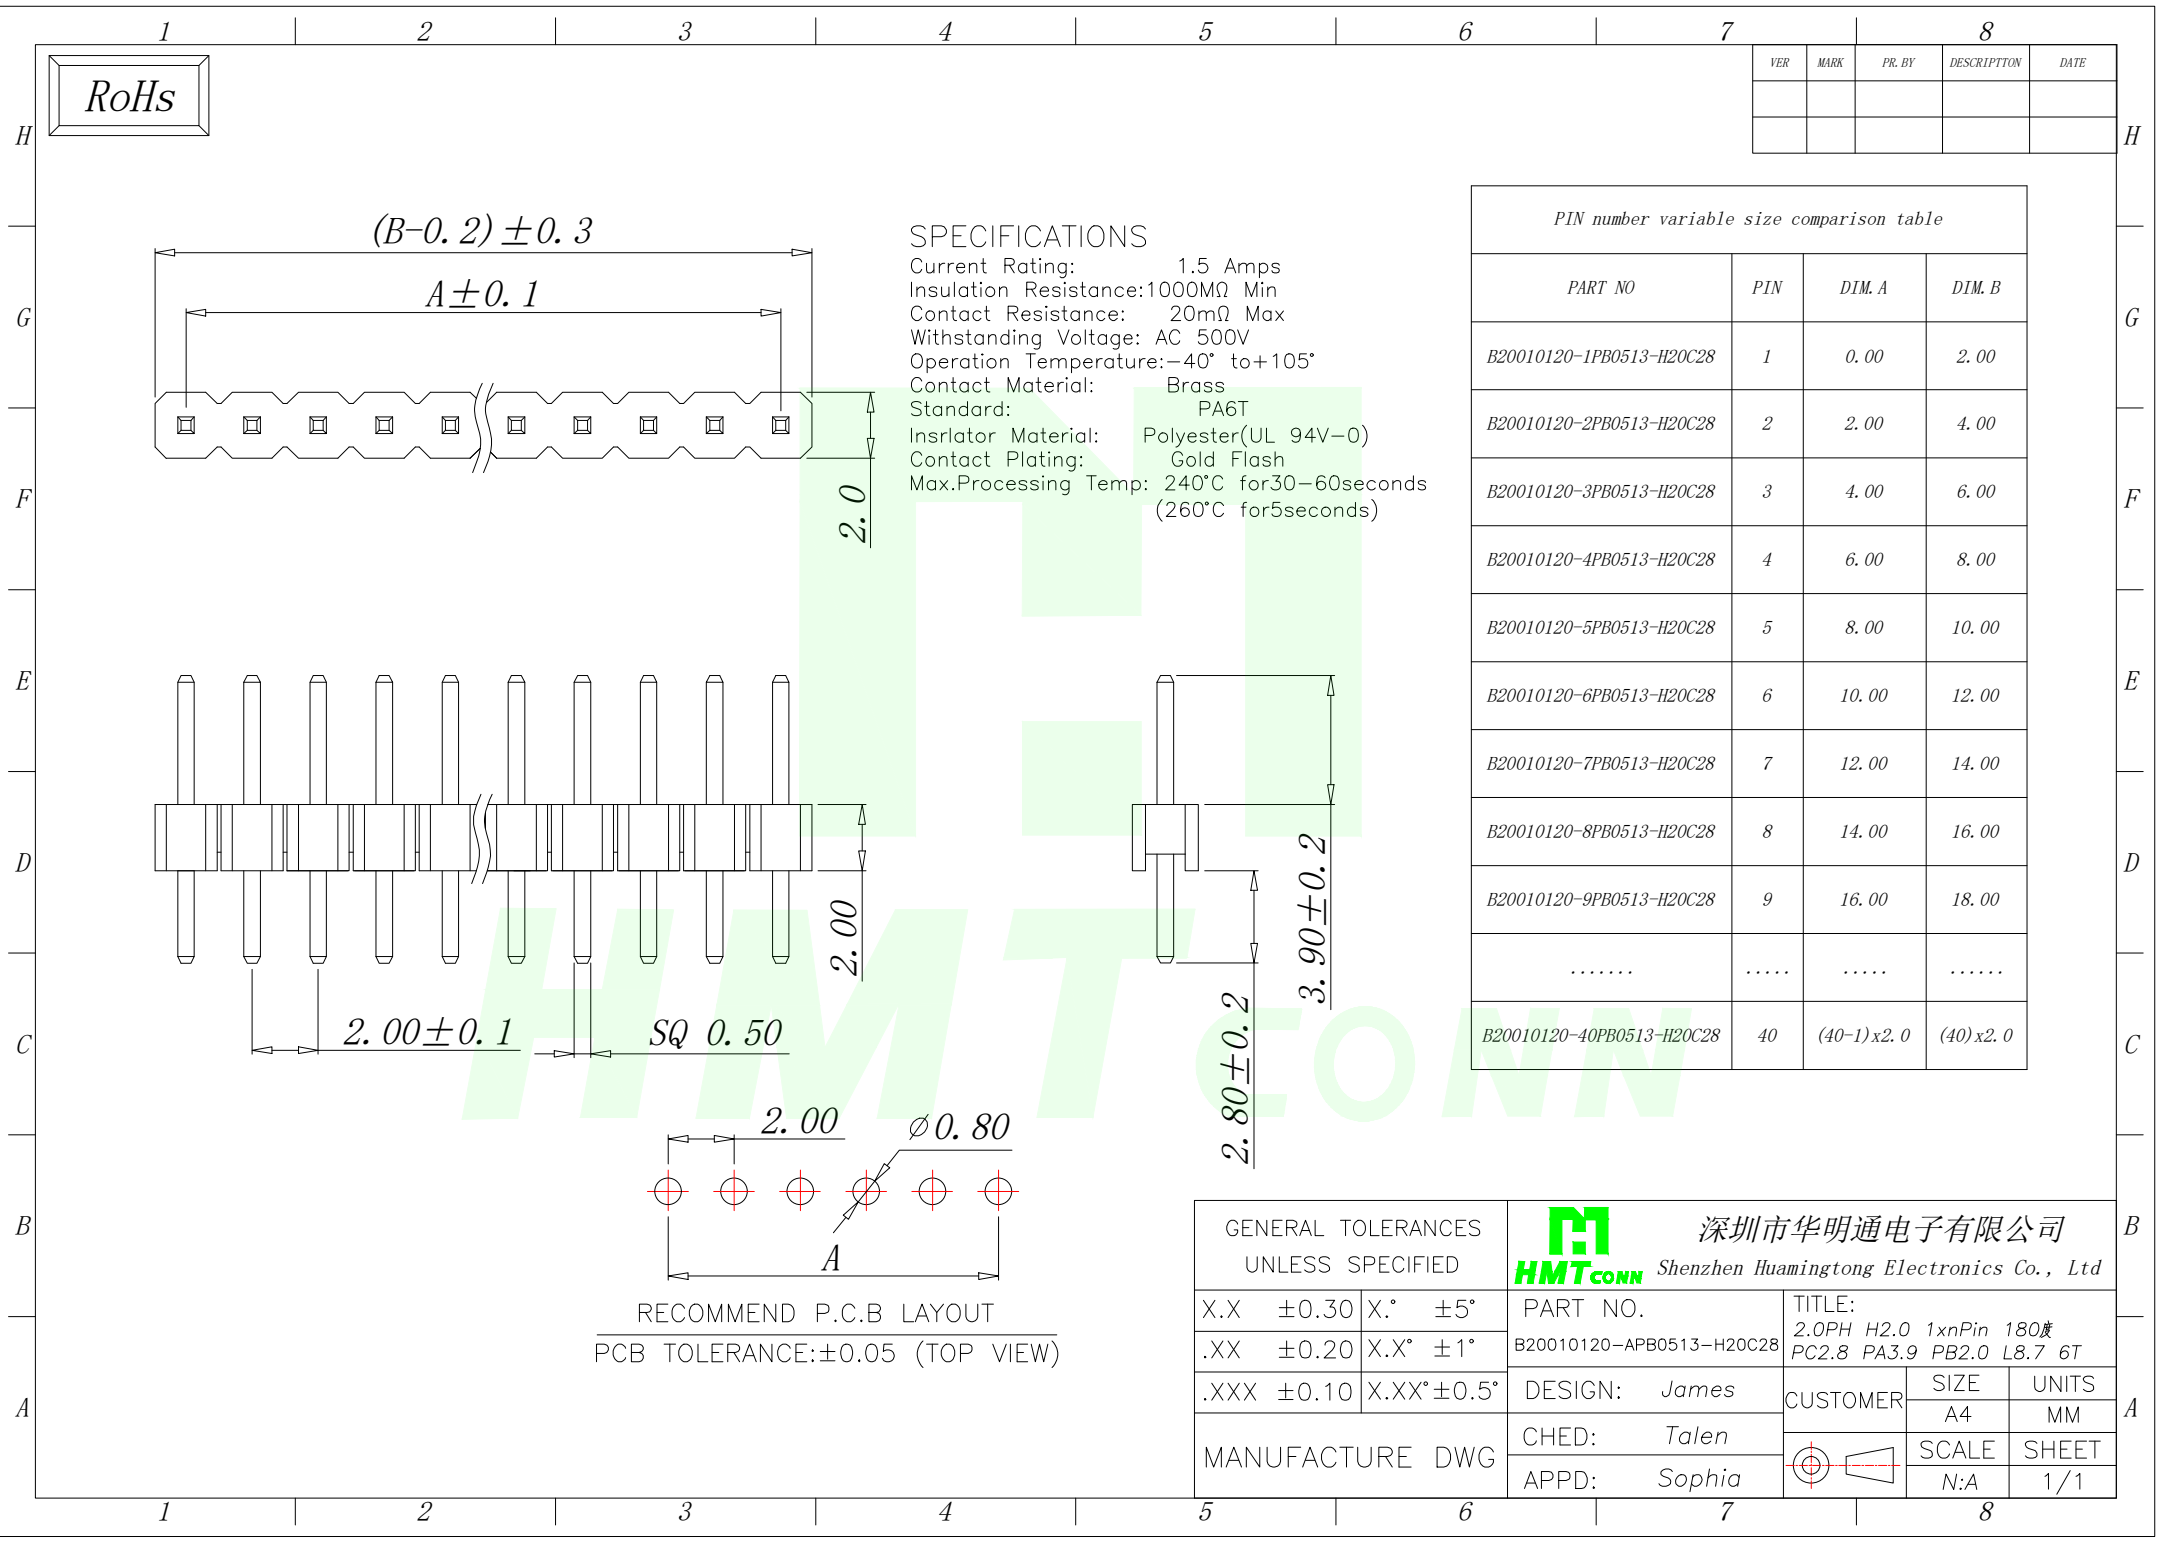

SPECIFICATIONS

Current Rating: 1.5 Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 500V
Operation Temperature: -40° to +105°
Contact Material: Brass
Standard: PA6T
Insulator Material: Polyester (UL 94V-0)
Contact Plating: Gold Flash
Max. Processing Temp: 240°C for 30-60 seconds
(260°C for 5 seconds)

PIN number variable size comparison table

PART NO	PIN	DIM. A	DIM. B
B20010120-1PB0513-H20C28	1	0.00	2.00
B20010120-2PB0513-H20C28	2	2.00	4.00
B20010120-3PB0513-H20C28	3	4.00	6.00
B20010120-4PB0513-H20C28	4	6.00	8.00
B20010120-5PB0513-H20C28	5	8.00	10.00
B20010120-6PB0513-H20C28	6	10.00	12.00
B20010120-7PB0513-H20C28	7	12.00	14.00
B20010120-8PB0513-H20C28	8	14.00	16.00
B20010120-9PB0513-H20C28	9	16.00	18.00
.....			
B20010120-40PB0513-H20C28	40	(40-1)x2.0	(40)x2.0

GENERAL TOLERANCES UNLESS SPECIFIED		 深圳市华明通电子有限公司 Shenzhen Huamingtong Electronics Co., Ltd			
X.X ±0.30	X.* ±5°	PART NO.	TITLE: 2.0PH H2.0 1x20Pin 180度		
.XX ±0.20	X.X* ±1°	B20010120-APB0513-H20C28	PC2.8 PA3.9 PB2.0 L8.7 6T		
.XXX ±0.10	X.XX* ±0.5°	DESIGN: James	CUSTOMER	SIZE	UNITS
MANUFACTURE DWG		CHED: Talen		A4	MM
		APPD: Sophia		SCALE	SHEET
				N:A	1/1