


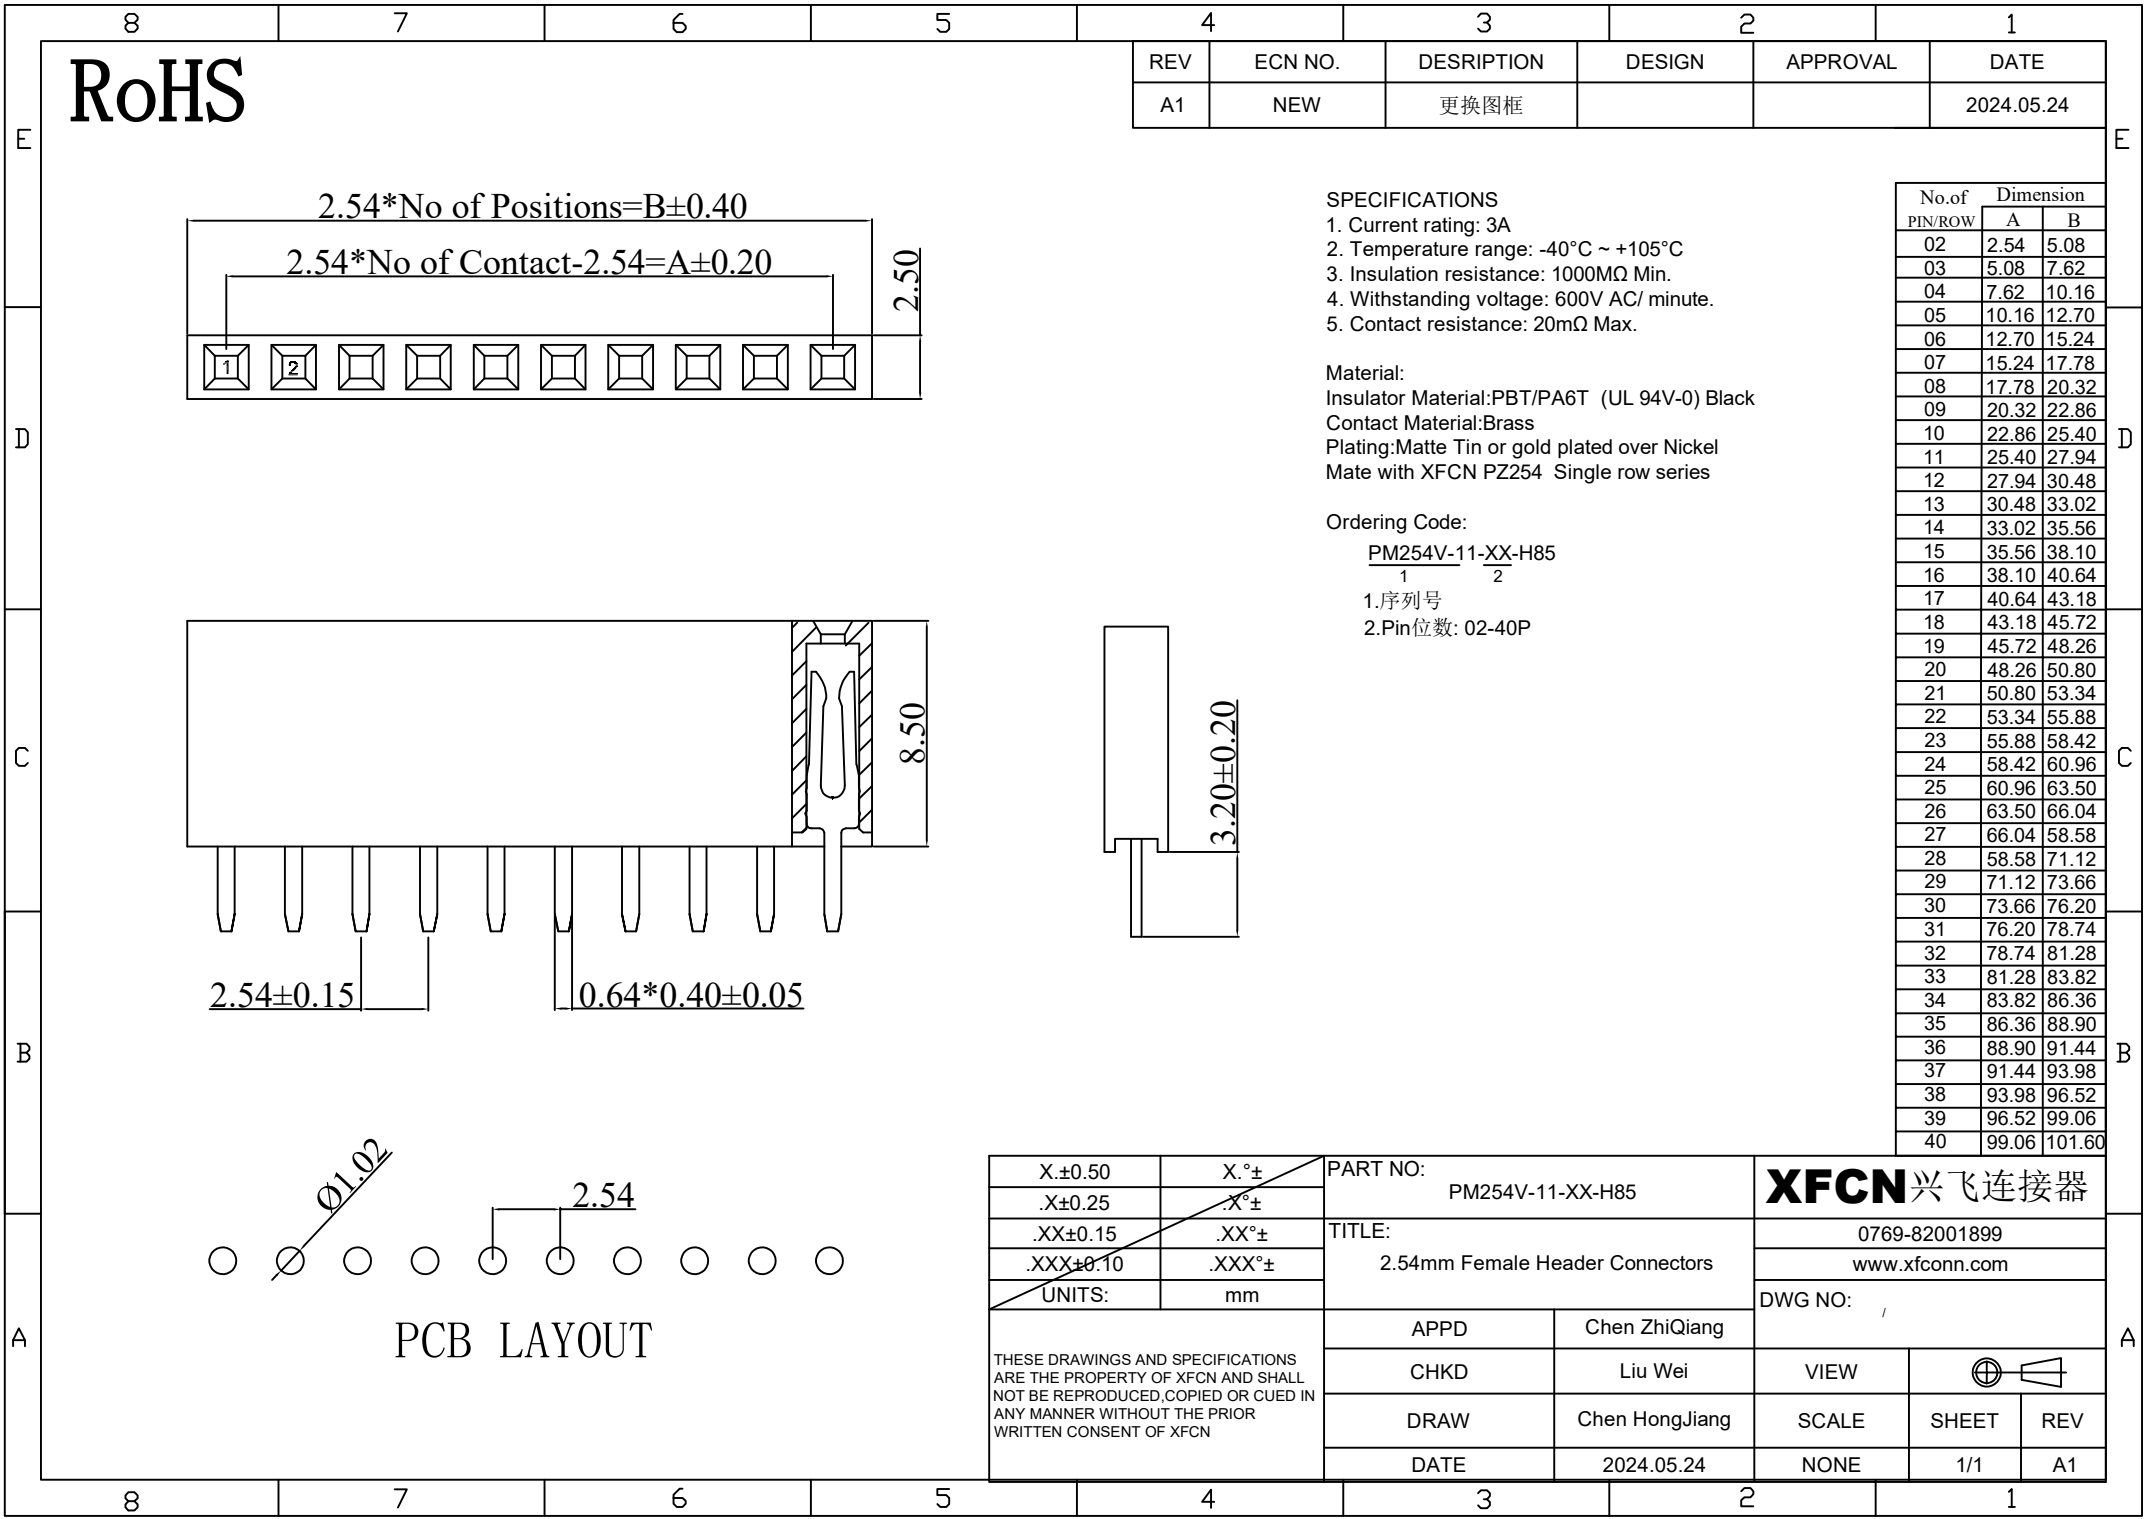

SPECIFICATIONS

1. Current rating: 3A

2. Temperature range: -40°C ~ +105°C

3. Insulation resistance: 1000MΩ Min.

4. Withstanding voltage: 600V AC/ minute.

5. Contact resistance: 20mΩ Max.

Material:

Insulator Material:PBT/PA6T (UL 94V-0) Black

Contact Material:Brass

Plating:Matte Tin or gold plated over Nickel

Mate with XFCN PZ254 Single row series

Ordering Code:

PM254V-11-XX-H85

12

1.序列号

2.Pin位数: 02-40P

No.of

Dimension

PIN/ROW

A

B

02

2.54

5.08

03

5.08

7.62

04

7.62

10.16

05

10.16

12.70

06

12.70

15.24

07

15.24

17.78

08

17.78

20.32

09

20.32

22.86

10

22.86

25.40

11

25.40

27.94

12

27.94

30.48

13

30.48

33.02

14

33.02

35.56

15

35.56

38.10

16

38.10

40.64

17

40.64

43.18

18

43.18

45.72

19

45.72

48.26

20

48.26

50.80

21

50.80

53.34

22

53.34

55.88

23

55.88

58.42

24

58.42

60.96

25

60.96

63.50

26

63.50

66.04

27

66.04

68.58

28

68.58

71.12

29

71.12

73.66

30

73.66

76.20

31

76.20

78.74

32

78.74

81.28

33

81.28

83.82

34

83.82

86.36

35

86.36

88.90

36

88.90

91.44

37

91.44

93.98

38

93.98

96.52

39

96.52

99.06

40

99.06

101.60