

REV.	ECN. NO.	APPD.
A		

材料数据

材质:

Pin: 黄铜, C3604

电镀:

镀锡: 2 μm/80 μ" 镍, 5 μm/200 μ 锡

镀金: 2 μm/80 μ" 镍, 0.8 μ" 金

阻燃等级: PPS UL94V-0

电气性能

额定电流: 3Amps/contact max.

接触电阻: ≤20mΩ/contact

绝缘电阻: ≥1000MΩ at V=100V


工作电压: 60VAC/DC

物理性能:

机械寿命: min 500

工作温度范围: -40° C to +105° C

焊接温度: +255° C

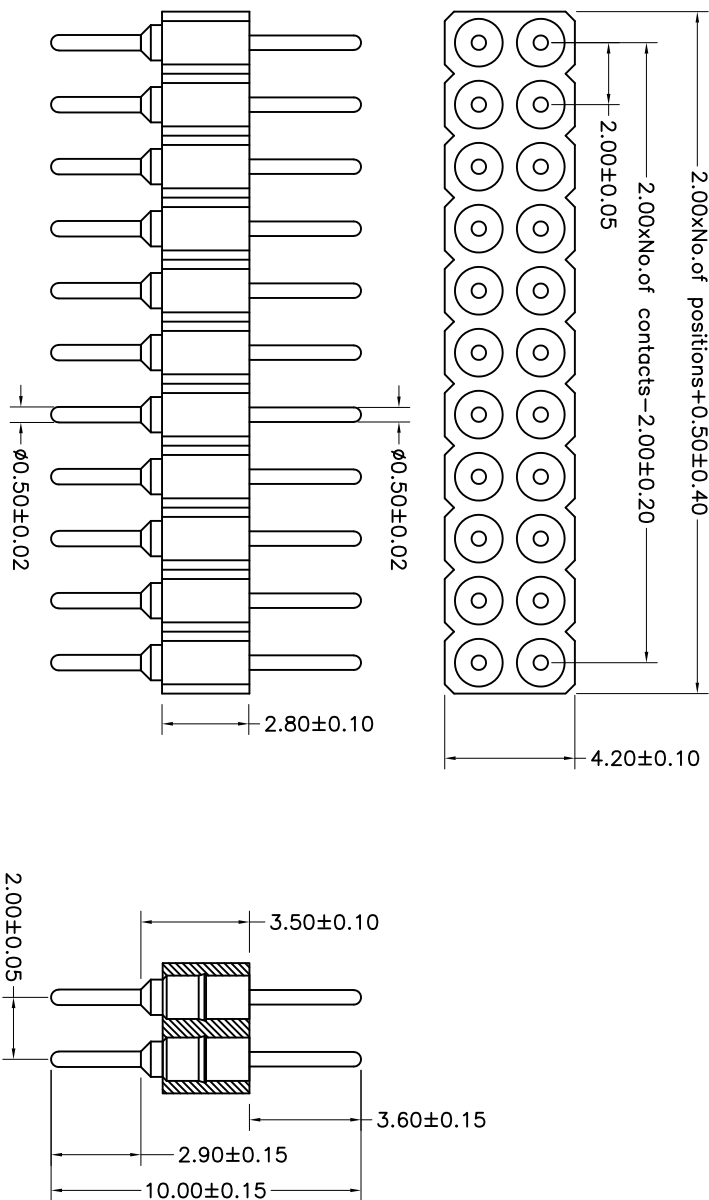

P.C.B LAYOUT

MT	X	X	X	XX	XXX
Specifications A=Public seat B=Female seat	Pitch (mm) A=1.27 B=1.778 C=2.00 D=2.54	Insulator Type code 1=Single row 2=Double row 3=Three row	Angel Options D=180° R=90° S=SMT I=IC	No. of Positions XX positions	Pin Length Options 1000=10.00mm

X.	± 0.30	X.°	± 5°	UNITS	mm	NAME/(INTENDED USE)	MINTRON CO.,LTD.
.X	± 0.20	.X°	± 2°	MATL		PART NO. (INTENDED USE)	TITLE:
.XX	± 0.10	.XX°	± 1°				Double row socket connector 2.00mm L=10.0mm
.XXX ± 0.05	.XXX° ± 0.5°			FINISH		APPD: SUNNY	DWG NO.:
PIN CONNECTOR				QTY		CHKD: USA	MTAC2-DXX10000
						DR: ZOE	SCALE
						2016-03-29	1/1
							SHEET
							REV.
							A