


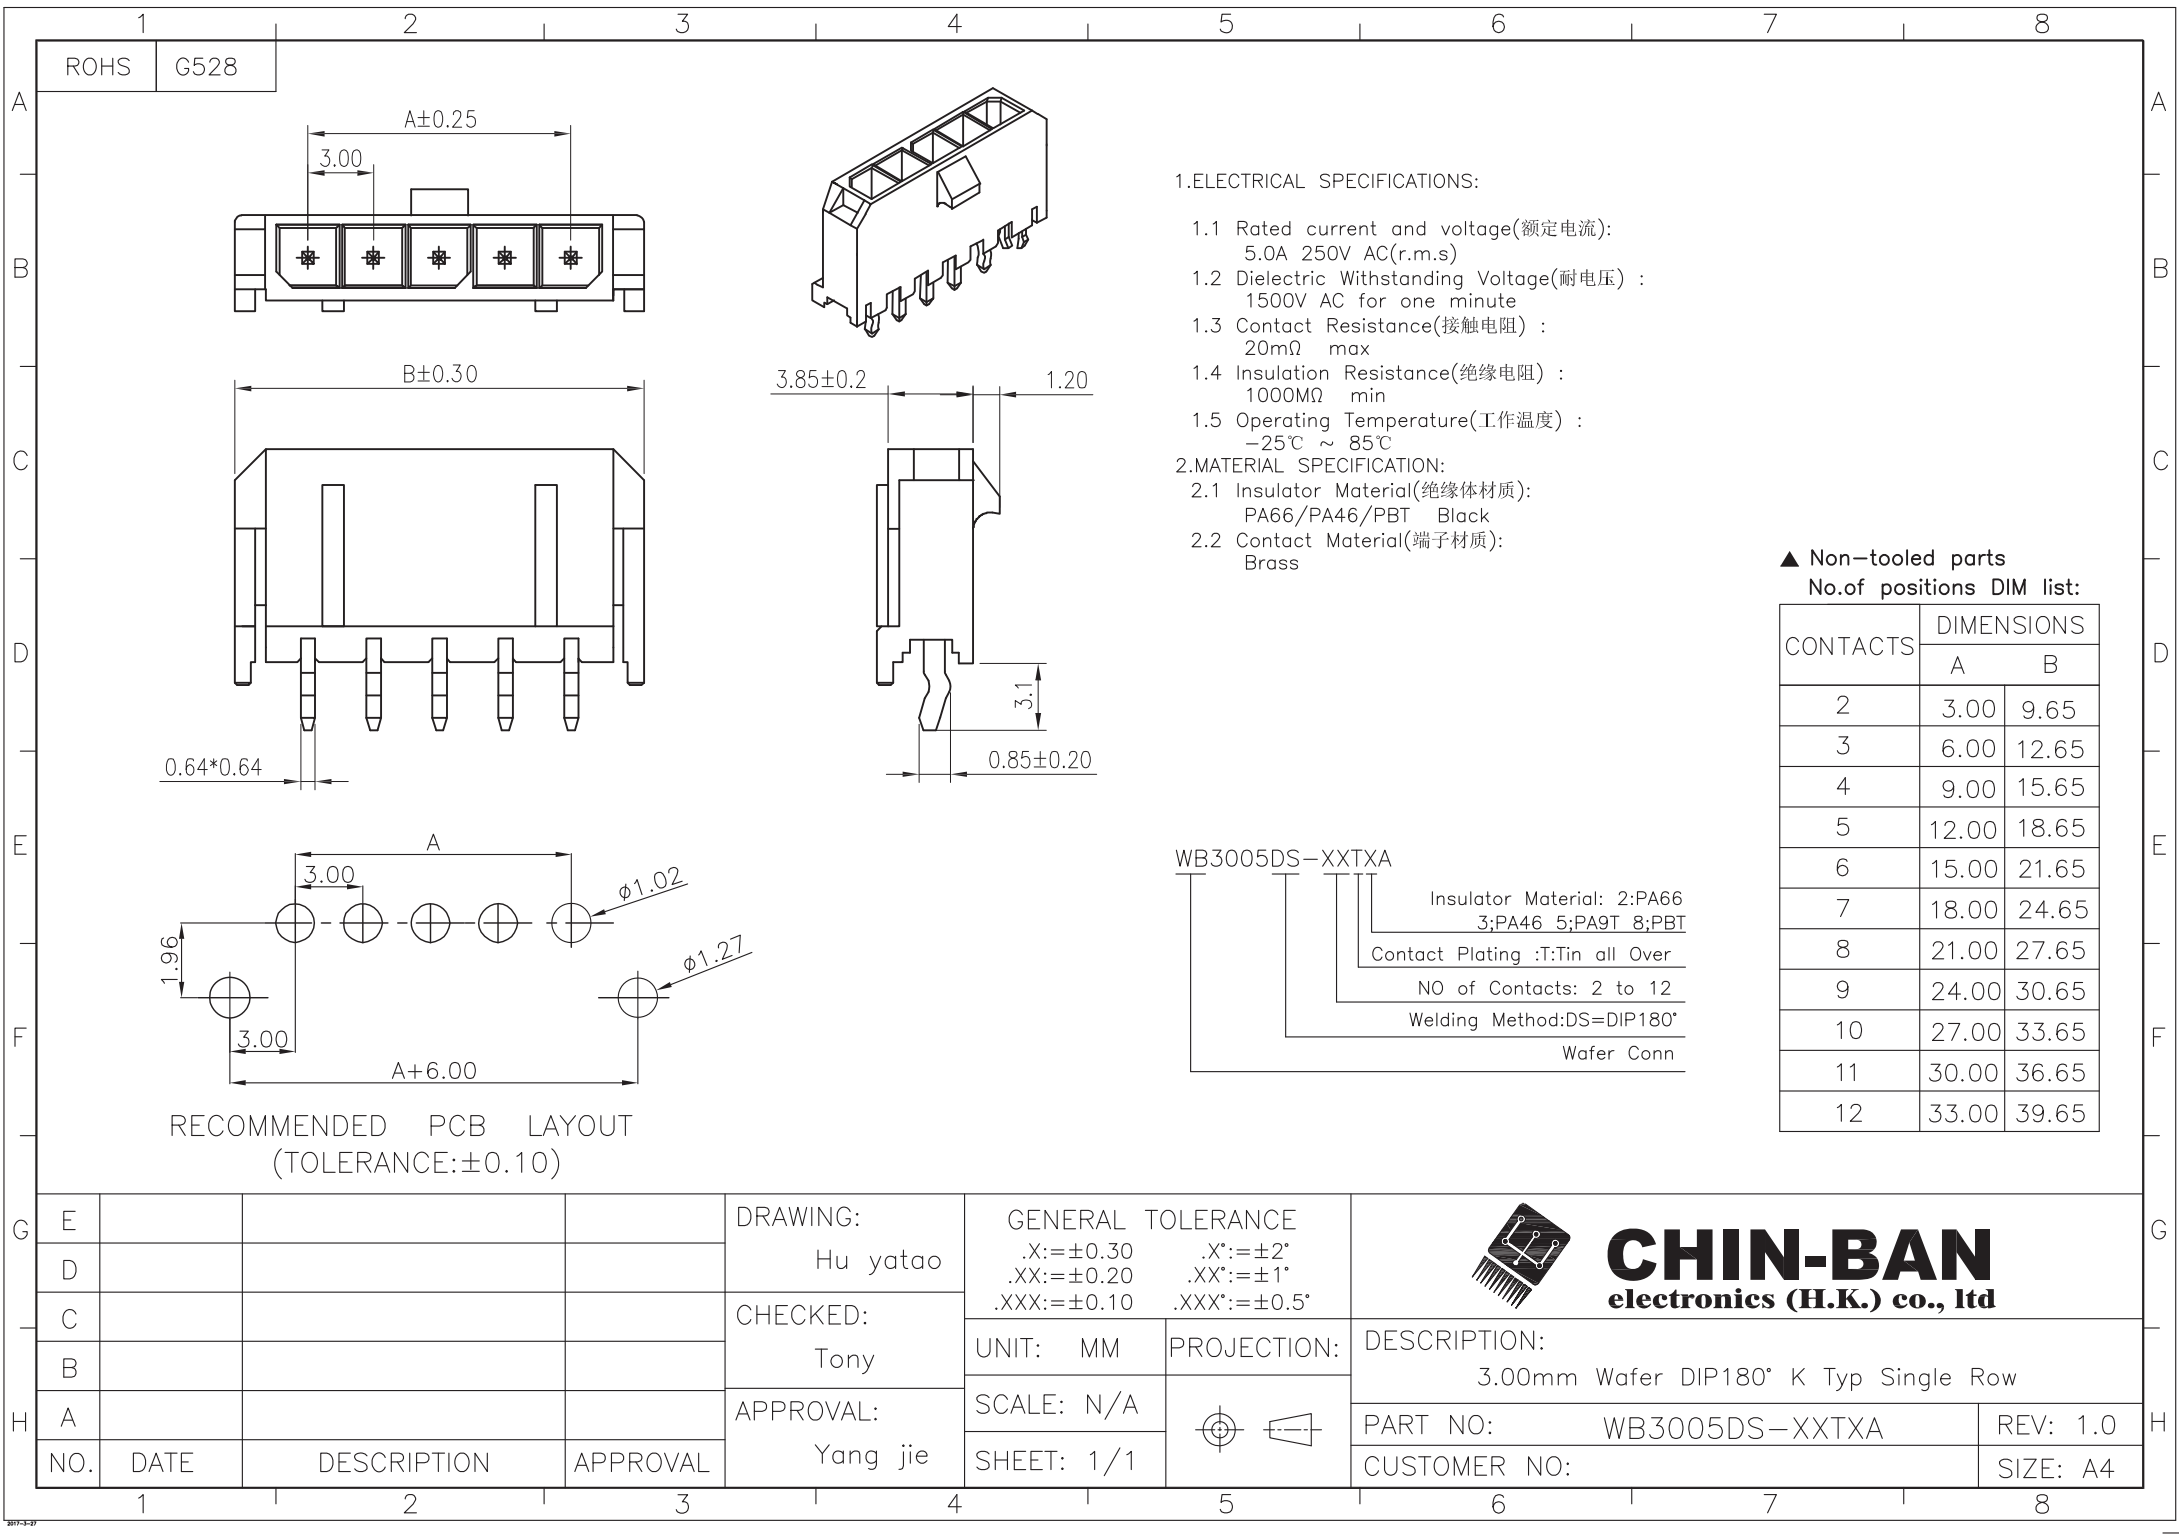

1.ELECTRICAL SPECIFICATIONS:

- 1.1 Rated current and voltage(额定电流):
5.0A 250V AC(r.m.s)
- 1.2 Dielectric Withstanding Voltage(耐电压) :
1500V AC for one minute
- 1.3 Contact Resistance(接触电阻) :
20mΩ max
- 1.4 Insulation Resistance(绝缘电阻) :
1000MΩ min
- 1.5 Operating Temperature(工作温度) :
-25℃ ~ 85℃

2.MATERIAL SPECIFICATION:

- 2.1 Insulator Material(绝缘体材质):
PA66/PA46/PBT Black
- 2.2 Contact Material(端子材质):
Brass

▲ Non—tooled parts
No.of positions DIM list:

CONTACTS	DIMENSIONS	
	A	B
2	3.00	9.65
3	6.00	12.65
4	9.00	15.65
5	12.00	18.65
6	15.00	21.65
7	18.00	24.65
8	21.00	27.65
9	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

WB3005DS-XXTXA

Insulator Material: 2:PA66
3;PA46 5;PA9T 8;PBT
Contact Plating :T:tin all Over
NO of Contacts: 2 to 12
Welding Method:DS=DIP180°
Wafer Conn

RECOMMENDED PCB LAYOUT
(TOLERANCE:±0.10)

DRAWING:
Hu yatao

CHECKED:
Tony

APPROVAL:
Yang jie

GENERAL TOLERANCE


.X:=±0.30 .X*:=±2°
.XX:=±0.20 .XX*:=±1°
.XXX:=±0.10 .XXX*:=±0.5°

UNIT: MM

SCALE: N/A

SHEET: 1/1

PROJECTION:



CHIN-BAN
electronics (H.K.) co., ltd

DESCRIPTION:
3.00mm Wafer DIP180° K Typ Single Row

PART NO: WB3005DS-XXTXA

CUSTOMER NO:

REV: 1.0

SIZE: A4